

# Corners—Outside 90° with Reinforcement


## MULTIPIECE SYSTEM INSTALLATION GUIDELINES

### FIRST COURSE WITH REINFORCEMENT

Begin by checking the wall plan to determine reinforcement lengths and elevations.



Lay a section of reinforcement near the corner of the wall, ensuring that it's placed within 1 inch of the face of the block and running along the back of the adjoining wall.

There is compacted backfill between grid layers.

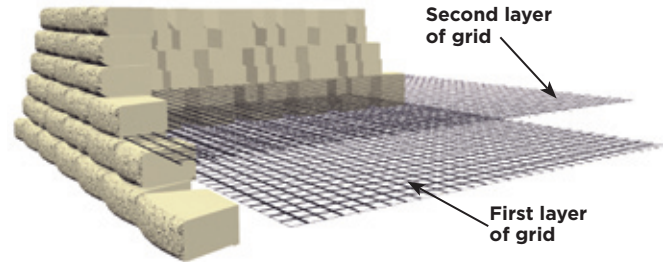

### NEXT COURSE WITH REINFORCEMENT

Lay the next course of block, backfill and compact. When installing the next section of reinforcement, place within 1 inch of the face of the block and running along the back of the adjacent wall.

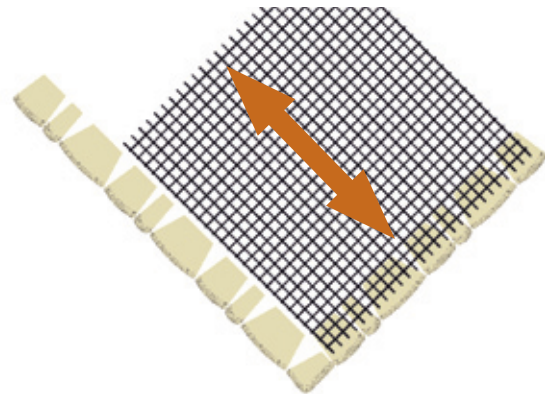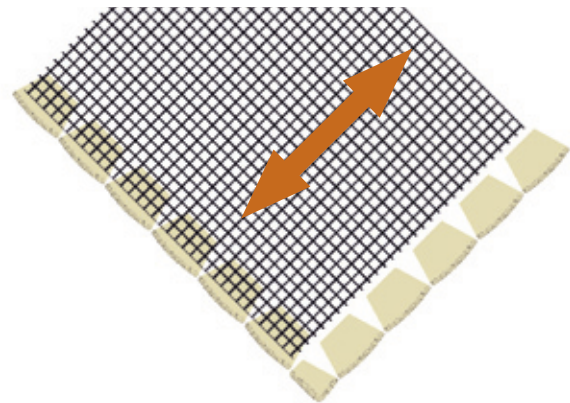

 = Strength direction

© 2011 Anchor Wall Systems, Inc. Anchor™ retaining wall systems are manufactured under license from Anchor Wall Systems, Inc. (AWS). The "Anchor Build Something Beautiful" logo is a trademark of AWS. The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see [anchorwall.com](http://anchorwall.com). All rights reserved.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.  
A&B0925 72.3311.1 12/11 4023