

# Drainage

## SINGLE-PIECE SYSTEM INSTALLATION GUIDELINES



Good drainage is critical to ensuring the long-term performance of Anchor™ products. Water collected from the drainage fill behind the wall must be able to drain down and away from the wall into storm drains or an area lower than the wall, either at the end of the wall, via a carrier drain or through drainage weep holes.

### FIRST COURSE

If the wall is longer than 50 feet, drainage weep holes must be installed through the wall face, no more than 50 feet apart. Remove 2 inches off the front of two adjacent blocks to provide sufficient space for the drainpipe to exit through the face to form the weep hole.

### NEXT COURSE

Build this and remaining courses using standard construction techniques.

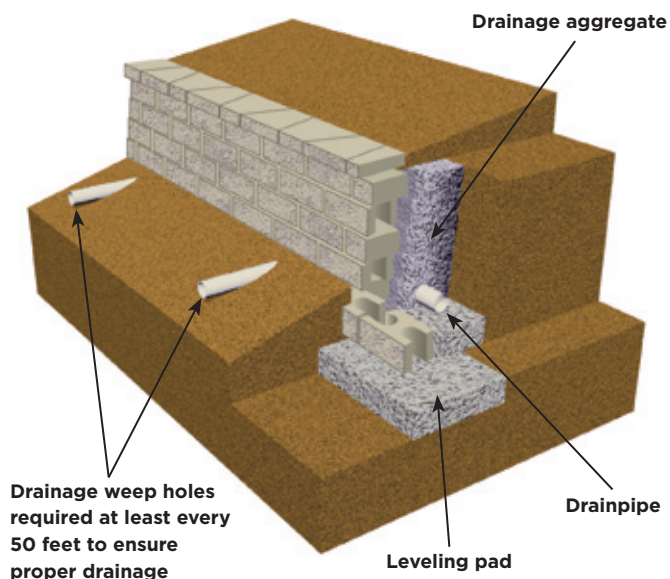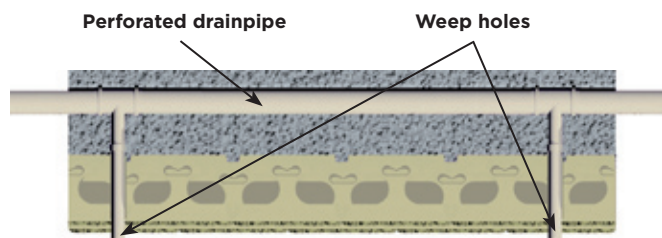

© 2011 Anchor Wall Systems, Inc. Anchor™ retaining wall systems are manufactured under license from Anchor Wall Systems, Inc. (AWS). The "Anchor Build Something Beautiful" logo is a trademark of AWS. The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see [anchorwall.com](http://anchorwall.com).

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.  
A&B0925 73.3133.1 07/11 4023