


FILL AREA BETWEEN
FACING UNITS WITH
FREE-DRAINING
AGGREGATE

TANDEM®
FACE AND
END UNIT

2 CONNECTORS
PER PANEL (MIN)


CUT UNITS TO
FIT AS NEEDED

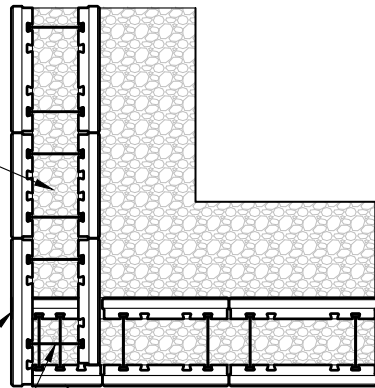

PRIMARY
STRENGTH
DIRECTION

NOTE:

IN THE "CROSS-OVER AREA" OF
REINFORCEMENT, ONE OF THE LAYERS OF
REINFORCEMENT SHOULD BE LOWERED OR
RAISED ONE COURSE TO ALLOW PLACEMENT
OF THE REINFORCEMENT WITH THE PRIMARY
REINFORCEMENT STRENGTH DIRECTION
PROPERLY ORIENTED. THE REINFORCEMENT
SHOULD NOT EXTEND INTO THE SEGMENTAL
RETAINING WALL UNITS ON THE RETURN LEG
OF THE 90-DEGREE CORNER.

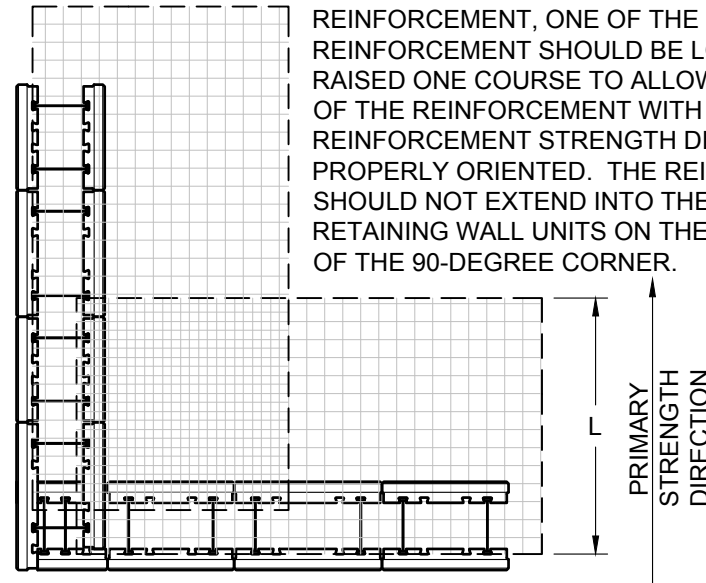

PRIMARY
STRENGTH
DIRECTION



belgard.com

877-235-4273

details@belgard.com

This drawing is for illustrative
purposes only and should not be
used for construction without the
signature of a registered
professional engineer.

Tandem® Retaining Wall System

Outside Corner Details

Scale:

1/2" = 1'-0"

Date:

4/1/2016

Drawn by:

SB

Drawing number:

TDRE29