

PAVER APPLICATIONS



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

PAVER COLORS & FINISHES

Standard Colors







Regional Colors

In addition to our standard color offering, Belgard Commercial products come in a number of local colors. See next page for all colors and finishes available.

Finishes

Manufacturing processes generate various finishes that are distinctive and can create the exact look you desire for your project. All processes are not available in all locations. Check with your local Belgard Sales Representative for more information.



Standard (smooth)

Unit surfaces and micro-chamfers are carefully molded using a highquality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



Shot Blast

Exposes the surface of the paving unit to reveal the natural beauty of the aggregates and pigmentation.



Ground Face

The top of the paving units are ground smooth which exposes the aggregate colors and pigmented background.

^{*} Light colored paver has an SRI value of ≥ 29 and/or an SR value of ≥ 0.33

PAVER TEXTURES, COLORS & FINISHES

Blended Colors











TOSCANA



Solid Ground Face Colors


















Note: We do our best to use high resolution photography that is representative of our actual colors in this book.

However, it is highly recommended that actual, full-size samples be obtained before approving colors.

Solid Shot Blast Colors











LINEN*/**









Solid Standard Finish Colors



ADA Kits & Truncated Domes

TRUFFLE



SUEDE





FOUNDRY




GRAPHITE


**Premium

					APPLIC	ATIONS		ADA	MECHANICAL INSTALL		FINIS	SHES		- CHAMFER	SQ. FT. PEF
UNITS		THICKNESS	SIZE	Ä		6-9		E	25°	Standard	Ground Face	Shot Blast	Antiqued	WIDTH	PALLET
	3" x 12" (60 mm available in new Striated face style)	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		√		√	√	√		3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm
	3" x 18"	101.6 mm	3" x 18"	101.6 mm				√		√	√	√		3 mm	49.5
	3" x 24"	101.6 mm	3" x 24"	101.6 mm				✓		✓	√	✓		3 mm	66
	3" x 30"	101.6 mm	3" x 30"	101.6 mm				√		✓	✓	✓		3 mm	41.25
	4" x 12"	80 mm	4" x 12"	80 mm	80mm			√		√	✓	√		3 mm	85
	4" x 18"	80 mm	4" x 18"	80 mm				√		✓	✓	√		3 mm	36
	4" x 24"	80 mm	4" x 24"	80 mm				√		✓	√	√		3 mm	48
	4" x 30"	80 mm	4" x 30"	80 mm				✓		✓	√	✓		3 mm	53.33
•	6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm		✓		✓	√	✓	✓	3 mm	120 (60 mn 96 (80 mm 72 (101.6 m
	6" Bishop Hat	60 mm 80 mm 101.6 mm	6" Bishop Hat	60 mm	80 mm	80 mm	80 mm 101.6 mm	√		✓	✓	√	√	3 mm	84.5 (60 mr 67.6 (80 mr 50.7 (101.6 m
•	6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	√		√	✓	√	✓	3 mm	112 (60 mn 90 (80 mm
	6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm	√		√	✓	√	√	3 mm	120 (60 mn 96 (80 mm 72 (101.6 m
	6" x 24"	101.6 mm	6" x 24"	101.6 mm				✓		✓	√	✓		3 mm	60
	9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80mm		✓		√	√	✓	✓	3 mm	90
~	12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm		✓		√	✓	✓	√	3 mm	120 (60 mn 96 (80 mm 72 (101.6 m
\Pi	12" x 12" ADA	60 mm	12" x 12"	60 mm				√		√				3 mm	120
	12" x 18"	60 mm	12" x 18"	60 mm				✓		√	√	✓		3 mm	120
	12" x 24"	60 mm	12" x 24"	60 mm				✓		√	√	✓		3 mm	120
	18" x 18"	60 mm	18" x 18"	60 mm				✓		√	✓			3 mm	90
	18" x 24"	60 mm	18" x 24"	60 mm				✓		√	✓			3 mm	120
	24" x 24"	60 mm	24" x 24"	60 mm				√		√	√			3 mm	80
	24" x 30"	60 mm	24" x 30"	60 mm				√		✓	✓			3 mm	100
00	3-Piece Modular	80 mm	6" x 6", 6" x 12", 12" x 12"	80 mm	80 mm			\checkmark		√	√	√	✓	3 mm	96


^{*} May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

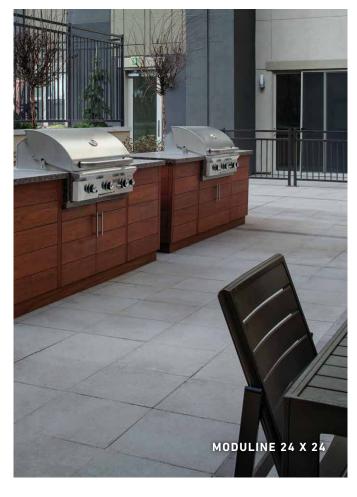



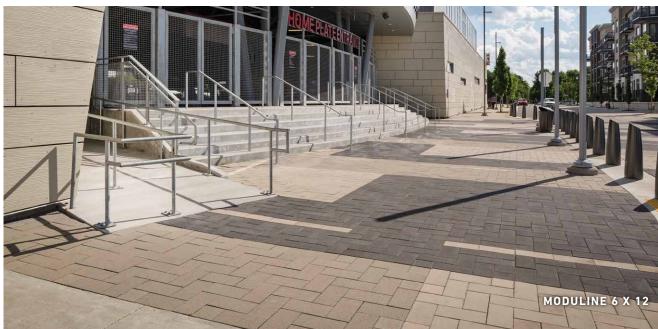



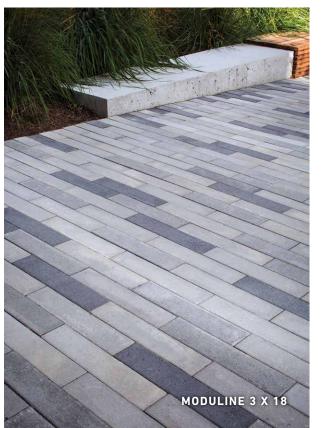





					APPLIC	CATIONS		ADA*	MECHANICAL INSTALL		FINI	SHES		CHAMFER	SQ. FT. PEF
UNITS		THICKNESS	SIZE	Ä				F		Standard	Ground Face	Shot Blast	Antiqued	WIDTH	PALLET
	Cambridge Cobble [®] (Square	60 mm 80 mm	6" x 6"	60 mm	80 mm (special order)	80 mm (special order)				√			special order	rounded	120 (60 mm) 96 (80 mm)
	Cambridge Cobble® (Rectange	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm			√			special order	rounded	112 (60 mm) 90 (80 mm)
	Catalina™ Stone	60 mm	6"x 12", 9" x 12", 12" x 12"	60 mm				√		✓				5 mm	120
	Catalina™ Slate Stone	60 mm	6"x 12", 9" x 12", 12" x 12"	60 mm				√						5 mm	120
>	Dimensions™ 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm				√		√				3 mm	112.5
*	Dimensions [™] 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm				✓		√				3 mm	120
* •	Dimensions [™] 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				√		√				3 mm	120
	Dimensions™ Accent	60 mm	3" x 9"	60 mm				√		✓				3 mm	103.13
	Dimensions™ Accent	60 mm	3" x 12"	60 mm				✓		√				3 mm	110
	Dimensions [™] Accent	60 mm	6" x 6"	60 mm				√		√				3 mm	120
	Dimensions™ Accent	60 mm	6" x 9"	60 mm				√		√				3 mm	112.5
	Dublin Cobble°	60 mm	6" x 3", 6" x 6", 6" x 9"	60 mm						√			√	varies between 2 and 5 mm	114
	Dublin Cobble® (Lg Square)	60 mm	9" x 9"	60 mm						√			✓	N/A	106
000	Dublin Cobble [®] (Circle Kit)	60 mm	6" various	60 mm						√			✓	N/A	75
	Holland Stone 4" x 4" (special order)	80 mm	4" × 4"	80 mm	80 mm	80 mm		*		√	√	√		7 mm	53.4
	Holland Stone 4" x 8" (80mm special order)	60 mm 80 mm	4" × 8"	60 mm	80 mm	80 mm	80 mm	*	80 mm	√	√	√	special order	7 mm	120 (60 mm) 96 (80 mm)
	Holland Stone 6" x 12" (special order)	60 mm 80 mm	6" x 12"	60 mm	80 mm			*		√	✓	√		7 mm	116
	Holland Stone 12" x 24" (special order)	60 mm	12" x 24"	60 mm				*		✓	✓	✓		7 mm	116


Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.


					APPLIC	ATIONS	ADA*	MECHANICAL		FINIS	SHES			
UNITS	,	THICKNESS	SIZE		AFFLIC	ATIONS	ADA	INSTALL	1 1110125				CHAMFER	SQ. FT. PER
0.00		THICKNESS	SIZE	Ä			E		Standard	Ground Face	Shot Blast	Antiqued	WIDTH	PALLET
Hollanc (special d	d Stone 8" x 8" order)	60 mm 80 mm	8" x 8"	60 mm 80 mm	80 mm	80 mm	*		√	√	√		7 mm	130 (60 mm) 85 (80 mm)
Hollanc (special o	d Stone 8" x 12" order)	60 mm 80 mm	8" x 12"	60 mm 80 mm	80 mm		*		√	√	√		7 mm	106 (60 mm) 85 (80 mm)
Holland (special d	d Stone 8" x 16" order)	60 mm	8" x 16"	60 mm			√		√	√	✓		7 mm	16
Holland (special or	d Stone 16" x 16" rder)	60 mm	16" x 16"	60 mm			\checkmark		\checkmark	✓	✓		7 mm	106
Holland (special or	d Handicapped Stall Kit	80 mm	Various	80 mm	80 mm	80 mm	\checkmark		✓	√	✓		7 mm	16
Mega-A (special or		80 mm	15% x 21"	80 mm					\checkmark				N/A	78.3
Mega-A	Arbel° Patio Slab	60 mm	15¾" x 21"	60 mm					\checkmark				N/A	104.4
Mega-B	Bergerac® (3 pc)	80 mm	4¾" x 9%6" 9%6" x 9%6" 9%6" x 14¾6"	80 mm					\checkmark			√	N/A	88
Mega-B	Bergerac® (Lg Square)	80 mm	14%6" x 14%6"	80 mm					\checkmark			✓	N/A	68
Mega-L (special or	.afitt* (3 pc)	80 mm	5¼" x 10½" 10½" x 10½" 10½" x 15¾"	80 mm					\checkmark				N/A	82.4
Mega-L (special or	.afitt* (Lg Square)	80 mm	15¾" x 15¾"	80 mm					\checkmark				N/A	82.4
Mega-L (special or	.afitt [®] Grana (3 pc)	80 mm	51/4" x 101/2" 101/2" x 101/2" 101/2" x 153/4"	80 mm					\checkmark				N/A	92.7
Mega-L (special or	.afitt [®] Grana (Lg Square)	80 mm	15¾" x 15¾"	80 mm					\checkmark				N/A	93
Melville	e [™] Plank Small	60 mm	5" x 11 ¹³ /16" 5" x 15 ³ /4" 5" x 19 ¹ /1/16"	60 mm			\checkmark		\checkmark				3 mm	114.53
Melville	e [™] Plank Large	60 mm	7½" x 11¾6" 7½" x 15¾" 7½" x 19½"	60 mm			\checkmark		\checkmark				3 mm	122.7
Old Wor (special or	rld Paver™ rder)	80 mm	51/8" x 73/4" 51/8" x 101/4" 51/8" x 1213/16"	80 mm					√				N/A	90.27
Origins	™ 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm			√		√				3 mm	112.5
Origins	[™] 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm			√		√				3 mm	120
Origins	· 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm			√		√				3 mm	120


Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

VEHICULA	VEHICULAR & ARCHITECTURAL PAVERS (CONTINUED)														
					APPLIC	ATIONS		ADA*	MECHANICAL INSTALL	FINISHES				CHAMEED	60 ET DED
UNITS		THICKNESS	SIZE	Ä		6-8		F		Standard	Ground Face	Shot Blast	Antiqued	CHAMFER WIDTH	SQ. FT. PER PALLET
•	Origins [™] Accent	60 mm	3" x 3"	60 mm				√		\checkmark				3 mm	96.25
•	Origins™ Accent	60 mm	6" x 6"	60 mm				√		√				3 mm	120
•	Origins™ Accent	60 mm	6" x 9"	60 mm				✓		\checkmark				3 mm	112.5
	Plaza Paver	50 mm	23¾ x 23¾	50 mm				√		\checkmark				3 mm	88
	Urbana° Stone (3 pc) (special order)	60 mm 80 mm	4" x 8" 8" x 8" 8" x 12"	60 mm	80 mm			*		√				varies between 4-10 mm	114
	Urbana° Stone (Lg Square) (special order)	60 mm 80 mm	12" x 12"	60 mm	80 mm			*		√				varies between 4-10 mm	116.25



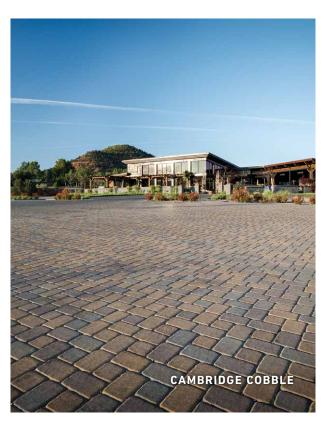

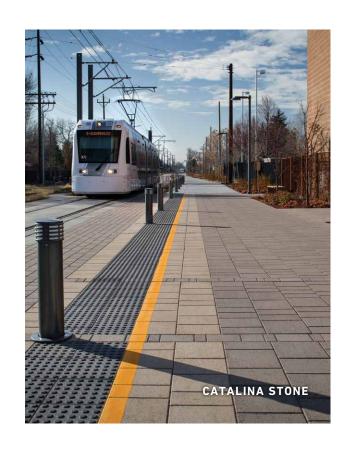

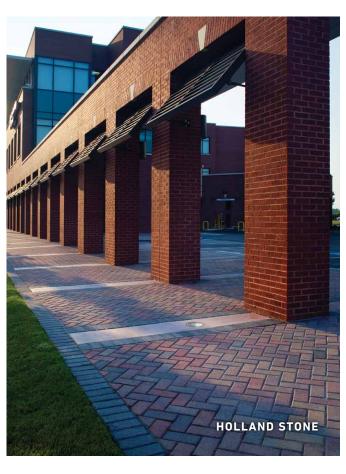


Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

^{*} May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

PERMEABLE PAVER	S														
				APPLIC	CATIONS		ADA*	MECHANICAL INSTALL		FINIS	SHES	MANUF.	%	CHAMFER	SQ. FT.
UNITS	THICKNESS	SIZE	Ä		₽		F		Standard	Ground Face	Shot Blast Antique	JOINT WIDTH	SURFACE OPENING	WIDTH	PER PALLET
AQUALINE™ SERIES															
3" x 12" (special order)	80 mm	3" x 12"	80 mm	80 mm			√		\checkmark	✓	✓	7 mm	10%	3 mm	88
4.5" x 9" Herringbone (special order)	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	√	✓	✓	√	✓	10 mm	10%	3 mm	90
9" L-Stone (special order)	80 mm	9" x 9"	80 mm	80 mm	80 mm	80 mm	√		√	√	✓	10 mm	10%	3 mm	90
6" x 6" (special order)	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓		√	✓	✓	7 mm	7%	3 mm	96
6" x 12" (special order)	80 mm	6" x 12"	80 mm	80 mm	80 mm		✓		√	✓	✓	7 mm	5%	3 mm	96
12" x 12" (special order)	80 mm	12" x 12"	80 mm	80 mm	80 mm		√		√	√	✓	7 mm	3%	3 mm	96
ADDITIONAL PRODUCT LINES	_									1				,	
Aqua Dublin	80 mm	3½" x 6½" i 6½" 6½" x 6½" x 6½" x 6½" x 6½% 6" 6" 6" 6" 6" 6" 6" 6" 6" 6" 6" 6" 6"	80 mm	80 mm			√	✓	\checkmark	✓	✓	10 mm	10%	3 mm	90.8


CONCRETE GRII	CONCRETE GRID PAVEMENTS														
				APPLIC	ATIONS		ADA	MECHANICAL INSTALL						SQ. FT.	
UNITS	THICKNESS	SIZE	À		6-9		F	562	Standard	Ground Face	Shot Blast	Antiqued		PER PALLET	
Turfstone™	80 mm	15¾" x 235%"	80 mm						√				40%	101	

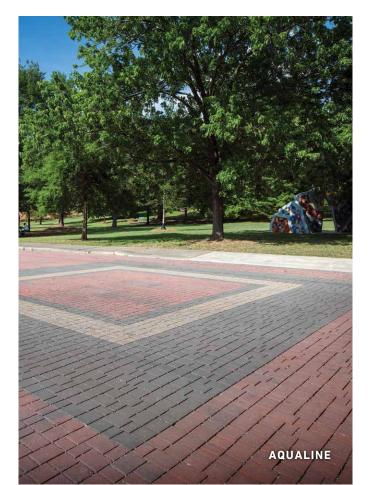








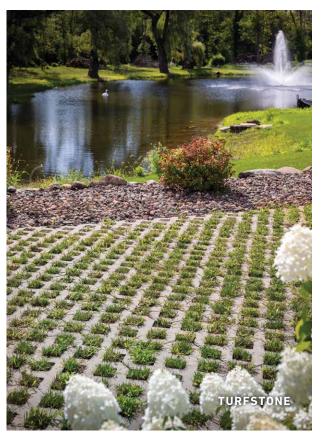





PORCEL	AIN PAVERS									
UNITS		APPEARANCE	THICKNESS	SIZE	STOCK COLOR OPTIONS (UNLESS MARKED AS SPECIAL ORDER)	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
	Ardesie - 24 x 24	Stone	3/4"	24" x 24"	Shore, Island, African Stone	✓	✓	232.5	60	2,160
	Glocal - 24 x 24	Concrete	3/4"	24" x 24"	Clear, Ideal, Chamois, Type, Classic, Absolute	✓	√	232.5	60	2,160
	Glocal - 24 x 48	Concrete	3/4"	24" x 48"	UT/ID - Ideal, Type, Classic, Absolute, Chamois, Clear CO - Ideal, Type, Classic, Absolute, Chamois	√	✓	271.25	70	2,621
	Jurupa	Wood	3/4"	12" x 48"	UT/ID - Cool, Master, Camp	√	√	279	72	2,664
	Lagoon - 24 x 48	Stone	3/4"	24" x 48"	Moonbeam, Sandshell, Atmosphere, Sharkskin, Cloudburst	✓	✓	271.25	70	2,621
	Na.Me - 18 x 36 (special order - allow 12-14 weeks lead time)	Stone	3/4"	18" x 36"	Bourgogne, Gris Beige, Jura Beige, Lumnezia, Overcast	✓	✓	234.9	54	2,198
	Na.Me - 24 x 24	Stone	3/4"	24" x 24"	UT/ID - Bourgogne, Jura Beige Special Order - Gris Beige, Lumnezia, Overcast	√	✓	232.5	60	2,160
	Noon - 8 x 48	Wood	3/4"	8" x 48"	Daylight, Ember, Honey	√	√	151.8	60	1,380
	Noon - 12 x 48	Wood	3/4"	12" x 48"	Daylight, Ember, Honey	√	✓	279	72	2,664
	Quarziti 2.0 - 24 x 24	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River, Mantle	√	√	232.5	60	2,160
	Quarziti 2.0 - 24 x 48	Stone	3/4"	24" x 48"	Glacier, Mountains, Waterfall, River	√	✓	271.25	70	2,621
	Quarziti 2.0 - 18 x 36	Stone	3/4"	18" x 36"	Glacier, Mountains, Waterfall, River	✓	√	234.9	54	2,198
	Quarziti Modular (2 pc)	Stone	3/4"	12" x 24" 24" x 36"	Glacier, Mountains, Waterfall, River	✓	√	279	72	2,808
	Silverlake - 24 x 24	Stone	3/4"	24" x 24"	UT/ID - Braies, Nemi, Orsi, Resia	√	√	232.5	60	2,160
	Silverlake - 24 x 48	Stone	3/4"	24" x 48"	Braies, Moritz, Nemi, Orsi, Resia	√	√	271.25	70	2,621
\Diamond	Unico	Stone	3/4"	13" x 24"	African Stone (UT/ID only), Shore, Island, Ideal, Type, Clear, Classic, Absolute, Chamois, Daylight, Ember, Honey, Glacier, Mountains, Waterfall, River, Mantle, Blue Stone (CO only)			255.8	120	2,080
	Porcelain Veneer (special order - allow 12-14 weeks lead time)	Stone	3/4"	4" x 17½"	UT/ID - African Stone, Island, Daylight, Ember, Honey, Glacier, Waterfall, River			390.7	770	1,900
	Verona	Stone	3/4"	24" x 24"	UT/ID - Blue Stone, Platinum, Taos, Yukon CO - Blue Stone	✓	✓	232.5	60	2,160

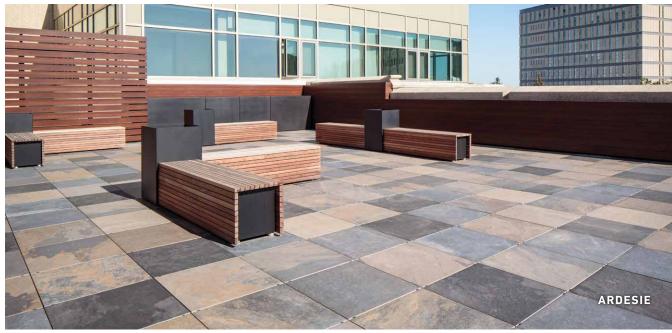





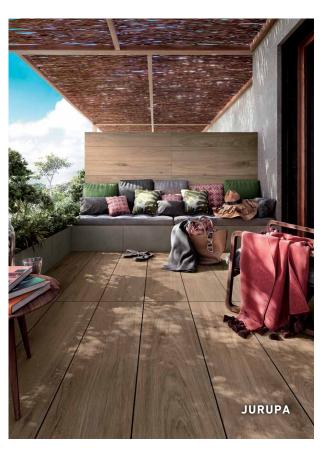

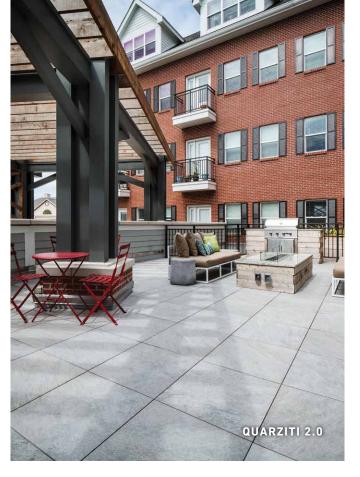





If installing on elevated surface over ¾" all porcelain must have a factory applied fiber mesh backing.

SILVERLAKE

		UNIT SIZE		CONNECT	TION TYPE	ACCESS	ORIES		TEXTURE			FACE STYLES	3		
UNITS	Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Beveled	Virtual Joint	BATTER/ SETBACK	SQ. FT. PER PALLET
Ashlar Tandem™	7"	13¾16" 15 ¹³ ⁄16" 187⁄16"	25/8"	Modular Block	Reinforced Polypropylene Connectors	(Units used to create column/corner)		√			√			0/4°	70.1
Belair Wall 2.0 Retaining	6"	6" 10" 16"	8"	Rear Lip		√		√			√			9.5°; 1" Per Course	30
Belair Wall® 2.0 Cap	3"	7"/8"	13½"					✓			√			N/A	144 each
Castlemanor® Cap PP	3"	14/8"	12"								√			N/A	54 each
Shelton™ Wall	6"	6/4", 12/10", 16/14"	10"		Fiberglass Pins	(Included on pallet)				✓	✓			Vertical or 10.6°	25.83 untumble 38.78 tumbled
Shelton™ Wall Cap PP	3"	14/8"	12"							√	√			N/A	54 each
Diamond Pro® PS Smooth Face	8"	18"	12"		Fiberglass Pins	(Sold separately)					✓			7.1°	32
Diamond Pro® PS Quarried Face	8"	18"	12"		Fiberglass Pins	(Sold separately)		√						1.7° or 7.1°	32
Diamond Pro® PS Straight Face	8"	18"	12"		Fiberglass Pins	(Sold separately)			✓		√			1.7° or 7.1°	32
Diamond Pro* PS Beveled Face (Special order)	8"	18"	12"		Fiberglass Pins				√			√		1.7° or 7.1°	32
Melville [™] Tandem	7"	13³/16" 15 ¹³ /16" 18 ⁷ /16"	25/8"	Modular Block	Reinforced Polypropylene Connectors	(Units used to create column/corner)					√			0/4°	70.1
Melville™ Wall (Cap available in 2 x 20 x 13)	4"	20"	10"											Vertical	26.67
Melville™ Wall Cap	2"	20"	13"											Vertical	72 each
Sterling* (Sold as SRW, can be split on site to make unit FSW)	6"	17¾"	12"		Fiberglass Pins	(Block splits to create corner)			√		√			Vertical or 10.6°	45
Tandem™ Cap	31/4"	24"	15"					✓			✓			N/A	32 each
Universal Cap	4"	18"	12"						✓		✓			N/A	64 each
Weston Stone™ Universal	4"	12"	8"			(Units used to create column/corner)				√	√			Vertical	42

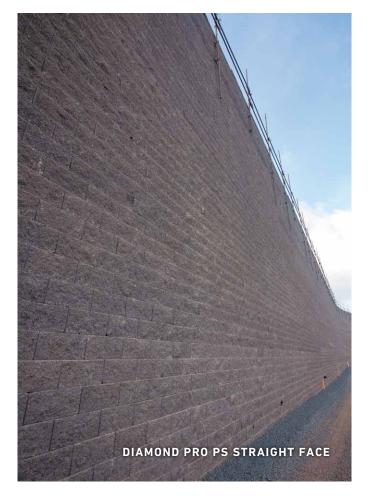



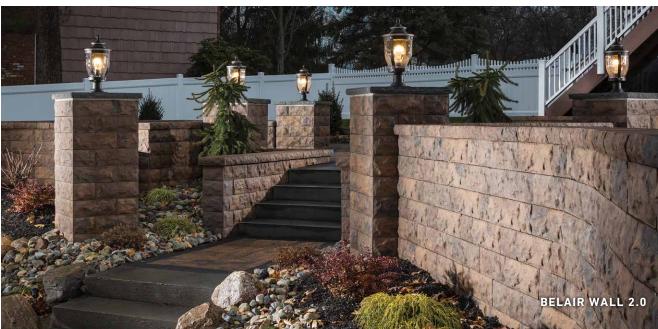









PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.

AMCOR LOCATION



333 S. Redwood Rd. North Salt Lake, UT 84054 Ph: 801-936-7628 Toll Free: 800-800-4004





BELGARDCOMMERCIAL.COM

©2022 Oldcastle APG, Inc. All Rights Reserved. BELCOMM22-038