



COMMERCIAL

PRODUCT OFFERING

PACIFIC NORTHWEST

NORTHERN IDAHO, MONTANA, OREGON & WASHINGTON



BELGARD
COMMERCIAL



AQUALINE 4½ X 9

PAVER APPLICATIONS



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles




Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

BELGARD PAVER COLORS & FINISHES OFFERING



Belgard Commercial allows you to customize your project with optional finishes: Smooth, Shot Blast and Ground face. Contact your Belgard Commercial Rep for more information.

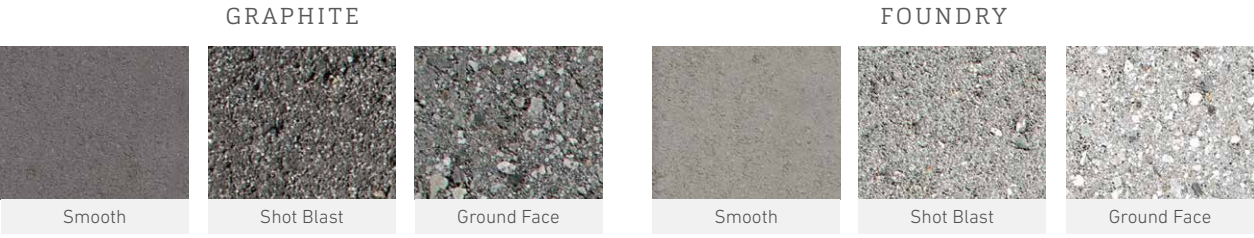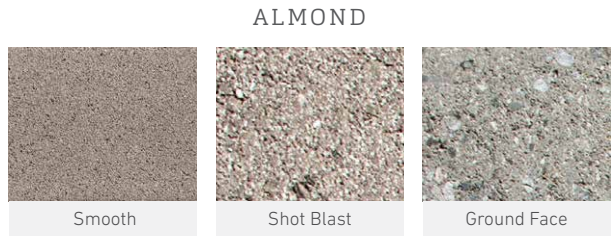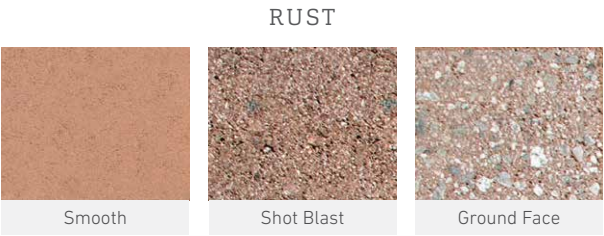

BLENDED COLORS



** Standard finish refers to the stock finish of a product which could be smooth or textured. Refer to product chart for individual products in standard finish.*













Contact your Belgard Representative for custom finish options and sample products.














DIMENSIONS 3 X 12
SMOOTH & GROUND FACE

| DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS | | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------|----------------------------|-----------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|-------------|------------|---------|------------------|-----------------------|--------------------------------------------|--|
| UNITS | THICKNESS | SIZE | APPLICATIONS | | | | ADA* | MECHANICAL INSTALL | FINISHES | | | | CHAMFER WIDTH | SQ. FT. PER PALLET | | |
| | | |  |  |  |  |  |  | Smooth | Ground Face | Shot Blast | Tumbled | | | | |
|  3" x 12" | 60 mm 80 mm 101.6 mm | 3" x 12" | 60 mm | 80 mm | 101.6 mm | | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 110 (60 mm) 88 (80 mm) 66 (101.6 mm) | |
|  3" x 18" | 101.6 mm | 3" x 18" | 101.6 mm | | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 49.5 | |
|  3" x 24" | 101.6 mm | 3" x 24" | 101.6 mm | | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 66 | |
|  6" x 6" | 60 mm 80 mm 101.6 mm | 6" x 6" | 60 mm | 80 mm | 101.6 mm | | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 120 (60 mm) 96 (80 mm) 72 (101.6 mm) | |
|  6" x 9" | 60 mm 80 mm | 6" x 9" | 60 mm | 80 mm | 80 mm | 80 mm | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 112 (60 mm) 90 (80 mm) | |
|  6" x 12" | 60 mm 80 mm 101.6 mm | 6" x 12" | 60 mm | 80 mm | 101.6 mm | 101.6 mm | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 120 (60 mm) 96 (80 mm) 72 (101.6 mm) | |
|  9" x 9" | 80 mm | 9" x 9" | 80 mm | 80 mm | 80mm | | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 90 | |
|  12" x 12" | 60 mm 80 mm 101.6 mm | 12" x 12" | 60 mm | 80 mm | 101.6 mm | | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 120 (60 mm) 96 (80 mm) 72 (101.6 mm) | |
|  12" x 12" ADA | 60 mm | 12" x 12" | 60 mm | | | | | ✓ | | ✓ | | | | 3 mm | 120 | |
|  12" x 18" | 60 mm | 12" x 18" | 60 mm | | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 120 | |
|  12" x 24" | 60 mm | 12" x 24" | 60 mm | | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 120 | |
|  18" x 18" | 60 mm | 18" x 18" | 60 mm | | | | | ✓ | | ✓ | ✓ | | | 3 mm | 90 | |
|  18" x 24" | 60 mm | 18" x 24" | 60 mm | | | | | ✓ | | ✓ | ✓ | | | 3 mm | 120 | |
|  24" x 24" | 60 mm | 24" x 24" | 60 mm | | | | | ✓ | | ✓ | ✓ | | | 3 mm | 80 | |

| Geometric Shapes | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------|-----------|------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|-------------|------------|---------|---------------|--------------------|--|
| Units | Thickness | Size | Applications | | | | ADA* | Mechanical Install | Finishes | | | | Chamfer Width | Sq. Ft. per Pallet | |
| | | |  |  |  |  |  |  | Smooth | Ground Face | Shot Blast | Tumbled | | | |
|  Diamond | 60 mm | 10⅜" x 12" | 60 mm | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 93.5 | |
|  Hexagon | 60 mm | 12" | 60 mm | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 85.73 | |
|  12" Parallelogram | 60 mm | 3" x 12" | 60 mm | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 114.31 | |
|  18" Parallelogram | 60 mm | 6" x 18" | 60 mm | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 100 | |

MODULINE SERIES® VEHICULAR & ARCHITECTURAL PAVERS

| UNITS | THICKNESS | SIZE | APPLICATIONS | | | | ADA* | MECHANICAL INSTALL | FINISHES | | | | CHAMFER WIDTH | SQ. FT. PER PALLET |
|--------------------------------------------------------------------------------------------|-----------|-----------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|-------------|------------|---------|------------------|-----------------------|
| | | |  |  |  |  |  |  | Smooth | Ground Face | Shot Blast | Tumbled | | |
|  4" x 12" | 80 mm | 4" x 12" | 80 mm | 80mm | | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 85 |
|  4" x 18" | 80 mm | 4" x 18" | 80 mm | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 36 |
|  4" x 24" | 80 mm | 4" x 24" | 80 mm | | | | ✓ | | ✓ | ✓ | ✓ | | 3 mm | 48 |
|  3-Piece | 80 mm | 6" x 6" 6" x 12" 12" x 12" | 80 mm | 80 mm | | | ✓ | | ✓ | ✓ | ✓ | ✓ | 3 mm | 96 |
|  5-Piece | 80 mm | 6" x 6", 6" x 9", 9" x 9", 6" x 12", 9" x 12" | 80 mm | 80 mm | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 3 mm | 96 |



* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.
















| VEHICULAR & ARCHITECTURAL PAVERS (CONTINUED) | | | | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|--------|-------------|------------|---------|-----------------|---------------------------|----------------------------|--------------------------------|--|
| UNITS | THICKNESS | SIZE | APPLICATIONS | | | | ADA* | MECH. INSTALL | FINISHES | | | | | CHAMFER WIDTH | SQ. FT. PER PALLET | PCS. PER PALLET | PALLET WEIGHT (LBS) | |
| | | |  |  |  |  |  |  | Textured | Smooth | Ground Face | Shot Blast | Tumbled | | | | | |
|  Avalon Slate Border | 60 mm | 6" x 9" | 60 mm | | | | ✓ | | ✓ | | | | ✓ | N/A | 112 | 300 | 3,024 | |
|  Avalon Slate Large (3 pc) | 60 mm | 6" x 12" 9" x 12" 12" x 12" | 60 mm | | | | ✓ | | ✓ | | | | ✓ | N/A | 120 | 160 | 3,240 | |
|  Belgian Cobble® | 60 mm | 7 irregular round sizes | 60 mm | | | | | | | ✓ | | | | N/A | 85 | 580 | 2,040 | |
|  Cambridge Cobble® (Square) | 60 mm 80 mm | 6" x 6" | 60 mm | 80 mm | 80 mm | | ✓ | | | ✓ | | | ✓ | Rounded Chamfer | 120 (60 mm) 96 (80 mm) | 480 (60 mm) 384 (80 mm) | 3,240 (60 mm) 3,580 (80 mm) | |
|  Cambridge Cobble® (Rectangle) | 60 mm 80 mm | 6" x 9" | 60 mm | 80 mm | 80 mm | 80 mm | ✓ | | | ✓ | | | ✓ | Rounded Chamfer | 112 (60 mm) 90 (80 mm) | 300 (60 mm) 240 (80 mm) | 3,024 (60 mm) 3,360 (80 mm) | |
|  Cambridge Cobble® (Circle Kit) | 60 mm | 6" x various | 60 mm | | | | ✓ | | | ✓ | | | ✓ | Rounded Chamfer | 78.5 | N/A | 2,120 | |
|  Catalina™ Grana Border | 60 mm | 6" x 9" | 60 mm | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | 4 mm | 112 | 300 | 3,020 | |
|  Catalina™ Grana Large (3 pc) | 60 mm | 6" x 12" 9" x 12" 12" x 12" | 60 mm | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | 4 mm | 120 | 160 | 3,230 | |
|  Dublin Cobble® (3 pc) | 60 mm | 3" x 6" 6" x 6" 6" x 9" | 60 mm | | | | ✓ | | ✓ | | ✓ | ✓ | ✓ | N/A | 114 | 480 | 3,041 | |
|  Dublin Cobble® (Large Square) | 60 mm | 9" x 9" | 60 mm | | | | ✓ | | ✓ | | ✓ | ✓ | ✓ | N/A | 106 | 200 | 2,964 | |
|  Dublin Cobble® Circle Kit** | 60 mm | 6" x various | 60 mm | | | | ✓ | | ✓ | | | | ✓ | N/A | 75 | N/A | 2,485 | |
|  Holland Stone | 60 mm 80 mm | 4" x 8" | 60 mm | 80 mm | 80 mm | 80 mm | ✓ | 80 mm | | ✓ | ✓ | ✓ | ✓ | 4 mm | 120 (60 mm) 96 (80 mm) | 540 (60 mm) 432 (80 mm) | 3,240 (60 mm) 3,575 (80 mm) | |
|  Lafitt™ Grana Slab (3 pc) | 50 mm | 7⅜" x 14⅞" 14⅞" x 14⅞" 14⅞" x 22⅞" | 50 mm | | | | ✓ | | | ✓ | ✓ | ✓ | | 4.5 mm | 140 | 96 | 3,220 | |

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

**Contact your Belgard representative for availability

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

| VEHICULAR & ARCHITECTURAL PAVERS (CONTINUED) | | | | | | | | | | | | | | | | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|--------|-------------|------------|---------|---------------|--------------------|-------------------------------|----------------------------|--------------------------------|
| UNITS | THICKNESS | SIZE | APPLICATIONS | | | | ADA* | MECH. INSTALL | FINISHES | | | | | CHAMFER WIDTH | SQ. FT. PER PALLET | PCS. PER PALLET | PALLET WEIGHT (LBS) | |
| | | |  |  |  |  |  |  | Textured | Smooth | Ground Face | Shot Blast | Tumbled | | | | | |
|  Lafitt™ Rustic Slab | 50 mm | 7⅞" x 14⅞" 14⅞" x 14⅞" 14⅞" x 22⅞" | 50 mm | | | | | ✓ | | ✓ | | | | | varies | 140 | 96 | 3,220 |
|  Mega-Arbel® | 60 mm 80 mm | 15⅜" x 21" | 60 mm 80 mm | | | | | ✓ | | ✓ | | | | | N/A | 104.4 (60 mm) 78.3 (80 mm) | 72 (60 mm) 54 (80 mm) | 2,766(60 mm) 2,897 (80 mm) |
|  Mega-Lafitt™ Slate (3 pc) | 80 mm | 10½" x 5⅜" 10½" x 10½" 10½" x 15⅞" | 80 mm | | | | | | | ✓ | | | | ✓ | N/A | 92.7 | 117 | 3,152 |
|  Mega-Lafitt™ Slate (Large Square) | 80 mm | 15⅞" x 15⅞" | 80 mm | | | | | | | ✓ | | | | ✓ | N/A | 93 | 54 | 3,162 |
|  Melville™ Plank Slim (3 pc) <i>(special order)</i> | 60 mm | 5" x 11⅜" 5" x 15¾" 5" x 19⅞" | 60 mm | | | | | ✓ | | | ✓ | ✓ | ✓ | | 3 mm | 114.5 | 210 | 3,150 |
|  Melville™ Plank Large (3 pc) <i>(special order)</i> | 60 mm | 7½" x 11⅜" 7½" x 15¾" 7½" x 19⅞" | 60 mm | | | | | ✓ | | | ✓ | ✓ | ✓ | | 3 mm | 122.7 | 150 | 3,380 |
|  Old World Paver™ | 80 mm | 5" x 7⅞" 5" x 10¼" 5" x 12⅜" | 80 mm | | | | | | | ✓ | | | | ✓ | N/A | 90.27 | 256 | 2,889 |
|  Urbana® Stone (3 pc) | 60 mm 80 mm | 7⅞" x 3⅝" 7⅞" x 7⅞" 7⅞" x 11⅜" | 60 mm 80 mm | 80 mm | | | | ✓ | | ✓ | | | | ✓ | N/A | 116.4 (60 mm) 105 (80 mm) | 270 (60 mm) 243 (80 mm) | 3,142 (60 mm) 3,814 (80 mm) |
|  Urbana® Stone (Large Square) | 60 mm 80 mm | 11⅜" x 11⅜" | 60 mm 80 mm | 80 mm | | | | ✓ | | ✓ | | | | ✓ | N/A | 116.25 (60 mm) 105 (80 mm) | 120 (60 mm) 108 (80 mm) | 3,138 (60 mm) 3,820 (80 mm) |

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



HOLLAND STONE



**MEGA-ARBEL &
MEGA-LAFITT BORDER**




MEGA-LAFITT












CAMBRIDGE COBBLE



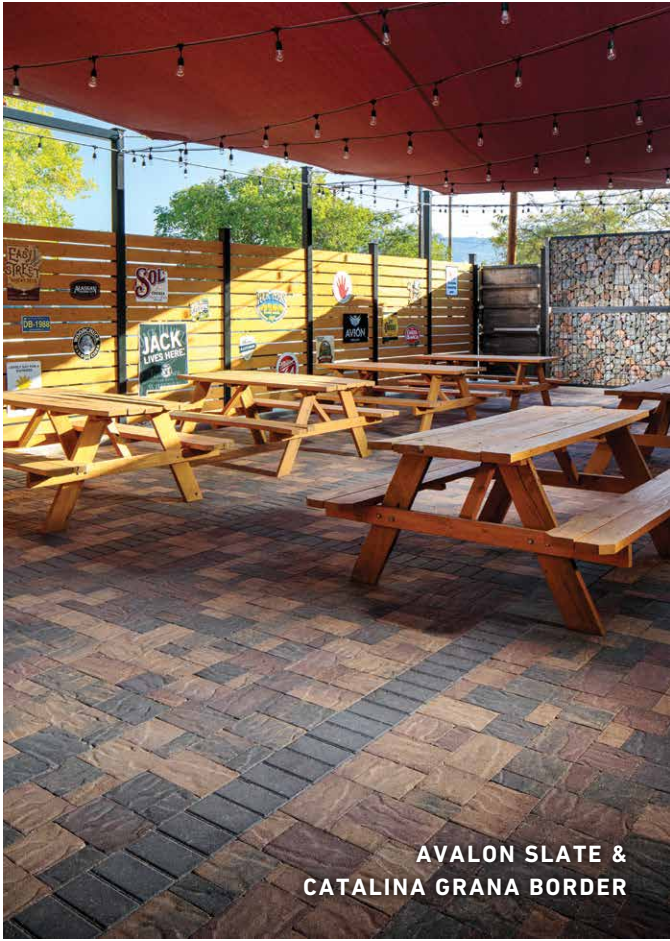






OLD WORLD PAVER




**AVALON SLATE &
CATALINA GRANA BORDER**

| PERMEABLE PAVERS | | | | | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------------------------|-------------------|--------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------|--------|-------------|------------|---------|--------------------|---------------------------|---------------|---------------------------|-----------------------------|---------------------------------|
| UNITS | THICKNESS | SIZE | APPLICATIONS | | | | ADA* | MECH. INSTALL | FINISHES | | | | | MANUF. JOINT WIDTH | % SURFACE OPENING | CHAMFER WIDTH | SQ. FT. PER PALLET | PCS. PER PALLET | PALLET WEIGHT (LBS) |
| | | |  |  |  |  |  |  | Textured | Smooth | Ground Face | Shot Blast | Tumbled | | | | | | |
| AQUALINE™ SERIES | | | | | | | | | | | | | | | | | | | |
|  3" x 12" | 80 mm | 3" x 12" | 80 mm | 80 mm | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | 7 mm | 10% | 3 mm | 88 | 352 | 3,012 |
|  4.5" x 9" | 80 mm | 4½" x 9" | 80 mm | 80 mm | 80 mm | 80 mm | ✓ | | | ✓ | ✓ | ✓ | ✓ | 7 mm | 10% | 3 mm | 90 | 320 | 3,100 |
|  6" x 6" | 80 mm | 6" x 6" | 80 mm | 80 mm | 80 mm | | ✓ | | | ✓ | ✓ | ✓ | ✓ | 7 mm | 7% | 3 mm | 96 | 384 | 3,295 |
|  6" x 12" | 80 mm 101.6 mm | 6" x 12" | 80 mm | 80 mm | 101.6 mm | 101.6 mm | ✓ | 101.6 mm | | ✓ | ✓ | ✓ | ✓ | 7 mm | 5% (80 mm) 9% (101 mm) | 3 mm | 96 (80 mm) 69 (101 mm) | 192 (80 mm) 144 (101 mm) | 3,350 (80 mm) 2,867 (101 mm) |
|  9" x 9" | 80 mm | 9" x 9" | 80 mm | 80 mm | 80 mm | | ✓ | | | ✓ | ✓ | ✓ | ✓ | 7 mm | – | 3 mm | 90 | 160 | 3,195 |
|  12" x 12" | 80 mm | 12" x 12" | 80 mm | 80 mm | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | 7 mm | 3% | 3 mm | 96 | 96 | 3,485 |
| ADDITIONAL PRODUCT LINES | | | | | | | | | | | | | | | | | | | |
|  Aqua Dublin (3 pc) | 80 mm | 3½" x 6⅛" 6⅛" x 6⅛" 10¼" x 6⅛" | 80 mm | 80 mm | | | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | 10 mm | 10% | 3 mm | 92.4 | 288 | 3,240 |
|  Eco Dublin® (3 pc) | 60 mm | 7⅞" x 3⅝" 7⅞" x 7⅞" 7⅞" x 11⅜" | 60 mm | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | 10 mm | 10% | 3 mm | 120 | 288 | 3,250 |

| CONCRETE GRID PAVEMENTS | | | | | | | | | | | | | | | | |
|------------------------------------------------------------------------------------------------|-----------|-------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------|-------------|------------|---------|----------------------|-----------------------|--------------------|---------------------------|
| UNITS | THICKNESS | SIZE | APPLICATIONS | | | | ADA | MECHANICAL INSTALL | FINISHES | | | | % SURFACE OPENING | SQ. FT. PER PALLET | PCS. PER PALLET | PALLET WEIGHT (LBS) |
| | | |  |  |  |  |  |  | Smooth | Ground Face | Shot Blast | Tumbled | | | | |
|  Turfstone™ | 80 mm | 15¾" x 23¾" | 80 mm | | | | | | ✓ | | | | 40% | 101 | 40 | 2,575 |

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

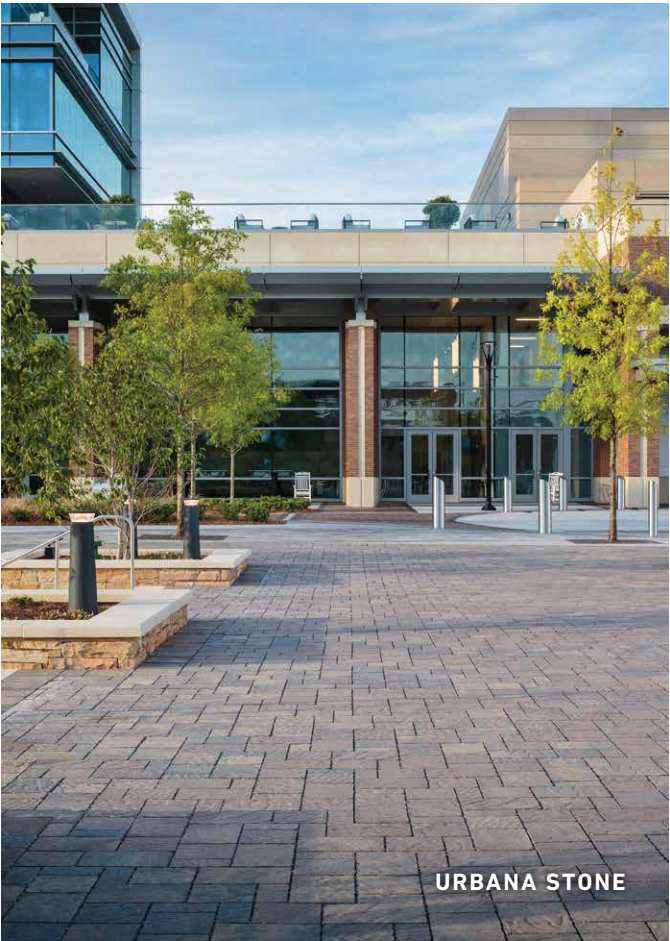

URBANA STONE




AQUALINE



AQUALINE




AQUA DUBLIN


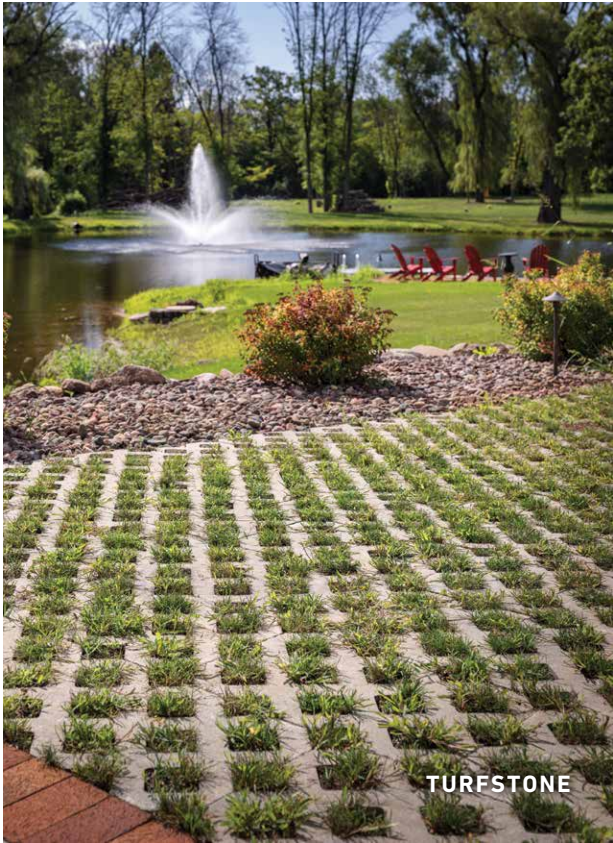

















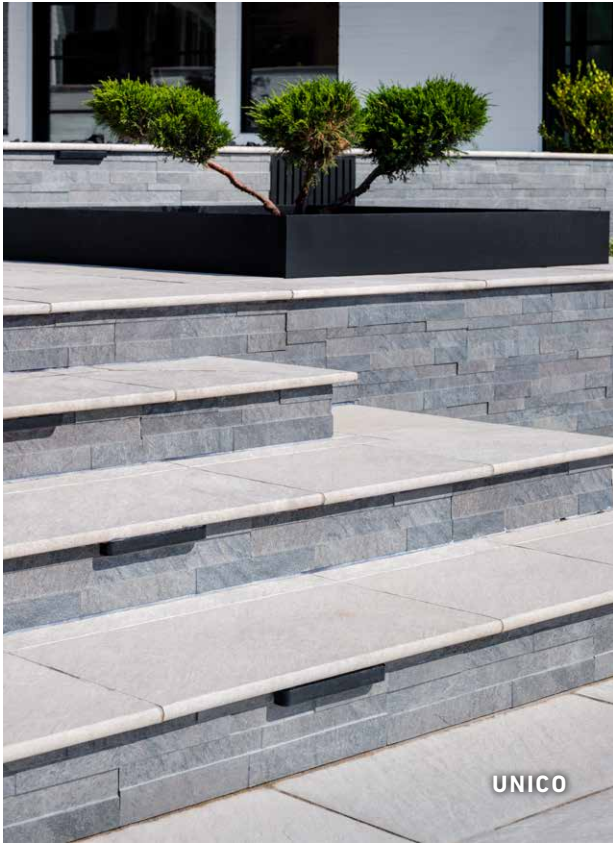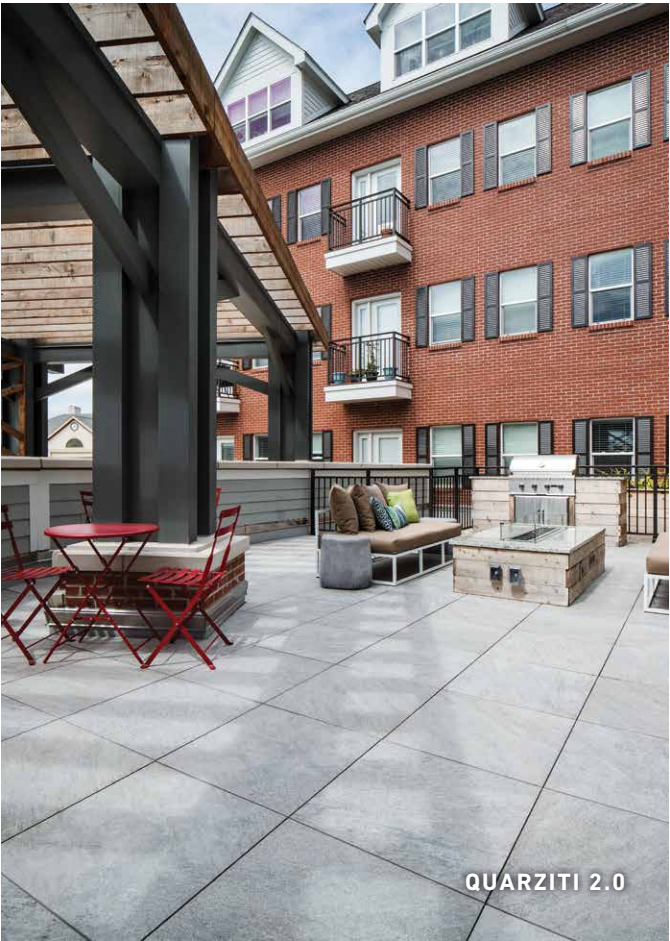


TURFSTONE



AQUALINE


| PORCELAIN PAVERS | | | | | | | | | | |
|-----------------------------------------------------------------------------------|--------------|------------|-----------|-----------|----------------------------------------------|-------------------------------------------------------------------------------------|----------------------|--------------------|-----------------|---------------------|
| UNITS | | APPEARANCE | THICKNESS | SIZE | COLOR OPTIONS | ADA | PEDESTAL APPLICATION | SQ. FT. PER PALLET | PCS. PER PALLET | PALLET WEIGHT (LBS) |
| | | | | | |  | | | | |
|  | Ardesie | Stone | ¾" | 24" x 24" | African Stone, Island | ✓ | ✓ | 232.5 | 60 | 2,160 |
|  | Glocal | Stone | ¾" | 24" x 24" | Ideal, Type and Classic | ✓ | ✓ | 232.5 | 60 | 2,160 |
|  | Glocal | Concrete | ¾" | 24" x 48" | Ideal, Type, Classic | ✓ | ✓ | 271.25 | 35 | 2,621 |
|  | Noon | Wood | ¾" | 12" x 48" | Daylight, Ember, Honey | ✓ | ✓ | 279 | 72 | 2,664 |
|  | Quarziti 2.0 | Stone | ¾" | 24" x 24" | Glacier, Mountains, Waterfall, River, Mantle | ✓ | ✓ | 232.5 | 60 | 2,160 |
|  | Quarziti 2.0 | Stone | ¾" | 24" x 48" | Glacier, Mountains, Waterfall, River, Mantle | ✓ | ✓ | 271.25 | 35 | 2,621 |
|  | Silverlake | Stone | ¾" | 24" x 24" | Braies, Nemi, Orsi | ✓ | ✓ | 232.5 | 60 | 2,160 |
|  | Unico | Stone | ¾" | 13" x 24" | Glacier, Mountains, Waterfall, River | ✓ | ✓ | 254.82 | 120 | 2,080 |
|  | Verona | Stone | ¾" | 24" x 24" | Blue Stone, Platinum, Taos, Yukon | ✓ | ✓ | 232.5 | 60 | 2,160 |




| SEGMENTAL RETAINING & FREESTANDING WALLS (SRW & FSW) | | | | | | | | | | | | | | | | | | | |
|-------------------------------------------------------------------------------------|------------------------------------|-----------|-------------------------|-------|-----------------|--------------------------|----------------------------------|-----|----------|-------|---------|-------------|---------|------------------|-----------|--------------------------------------|--------------------------|--------------------|---------------------------|
| UNITS | | UNIT SIZE | | | CONNECTION TYPE | | ACCESSORIES (SOLD SEPARATELY) | | TEXTURE | | | FACE STYLES | | | | BATTER/ SETBACK | SQ. FT. PER PALLET | PCS. PER PALLET | PALLET WEIGHT (LBS) |
| | | Height | Width | Depth | Block | Other | Column/ Corner Unit | Cap | Sculpted | Split | Tumbled | Straight | Beveled | Virtual Joint | Stone Cut | | | | |
|  | Ashlar Tandem™ | 7" | 13¾", 15¹³⁄₁₆", 18⁷⁄₁₆" | 2⅝" | | Polypropylene Connectors | | ✓ | ✓ | | | | | | | 0 / 4° | 70 | 90 | 2,032 |
|  | Belair Wall® 2.0 Freestanding Wall | 6" | 6", 10", 16" | 5" | | | ✓ | ✓ | ✓ | | | ✓ | | | | Vertical | 30 | 120 | 2,939 |
|  | Belair Wall® 2.0 Retaining Wall | 6" | 6", 10", 16" | 8" | Rear Lip | | ✓ | ✓ | ✓ | | | ✓ | | | | 9°; 1" Per Course | 30 | 60 | 2,250 |
|  | Diamond® 10D | 6" | 17¼" | 10" | Rear Lip | | ✓ | ✓ | | ✓ | | ✓ | ✓ | | | 10.6 Degree; 1.125" Per Course | 39.4 | 54 | 2,916 |
|  | Diamond Pro® | 8" | 18" | 12" | Rear Lip | | ✓ | ✓ | | ✓ | | ✓ | ✓ | | ✓ | 7.1°; 1" Per Course | 45 | 45 | 3,380 |
|  | Diamond Pro® PS | 8" | 18" | 12" | | Fiberglass Pins | | ✓ | | ✓ | | ✓ | ✓ | | ✓ | Near Vertical, 7.1° | 45 | 45 | 3,380 |
|  | Highland Stone® SRW Small & Medium | 6" | 12", 6" | 12" | Rear Lip | | ✓ | ✓ | | ✓ | | ✓ | | | | 10.6°; 1.125" Per Course | 33.75 | 45 | 3,875 |
|  | Highland Stone® SRW Large | 6" | 18" | 12" | Rear Lip | | ✓ | ✓ | | ✓ | | ✓ | | | | 10.6°; 1.125" Per Course | 33.75 | 45 | 3,875 |
|  | Highland Stone® FSW Small & Medium | 6" | 12", 6" | 9" | | | ✓ | ✓ | | ✓ | | ✓ | | | | Vertical | 32 | 40 | 2,630 |
|  | Highland Stone® FSW Large | 6" | 18" | 9" | | | ✓ | ✓ | | ✓ | | ✓ | | | | Vertical | 30 | 40 | 2,850 |
|  | Highland Stone® 2.0 FSW | 6" | 6", 12", 18" | 5" | | | ✓ | ✓ | | ✓ | | ✓ | | | | Vertical | 47.04 | 96 | 3,255 |
|  | Melville Tandem™ | 7" | 13¾", 15¹³⁄₁₆", 18⁷⁄₁₆" | 2⅝" | | Polypropylene Connectors | | ✓ | | | | ✓ | | | | 0 / 4° | 70 | 90 | 2,032 |
|  | Melville™ Wall | 4" | 20" | 10" | | | | ✓ | | | | ✓ | | | | Vertical | 26.67 | 48 | 3,120 |
|  | Melville™ Wall Cap | 2" | 20" | 12" | | | | ✓ | | | | ✓ | | | | Vertical | 120 | 70 | 3,100 |
|  | Shelton Wall™ | 6" | 6", 12", 16" | 10" | | Fiberglass Pins | | ✓ | | | ✓ | ✓ | | | | Vertical | 26.67 | 48 | 3,120 |
|  | Vertica® | 8" | 18" | 11" | Surface Lug | | | ✓ | | ✓ | | ✓ | ✓ | ✓ | | 2°; 9/32" Setback & 4°; 1/2" Setback | 45 | 45 | 3,825 |
|  | Vertica Pro® | 8" | 18" | 20" | Surface Lug | | ✓ | ✓ | | ✓ | | ✓ | ✓ | | | 2°; 9/32" Setback | 30 | 30 | 3,600 |
|  | Weston Universal | 4" | 12" | 8" | | | | | | | ✓** | ✓ | | | | Vertical | 33.5 | 120 | 3,136 |
|  | Weston Stone™ (3 pc) | 4" | 8", 12", 16" | 8" | | | | | | | ✓** | ✓ | | | | Vertical | 42 | 126 | 3,400 |

* This height assumes cores are filled with drainage aggregate, level backfill and clean, compacted sand or gravel and no surcharge. Contact a Belgard Representative for more information.

** Available in untumbled

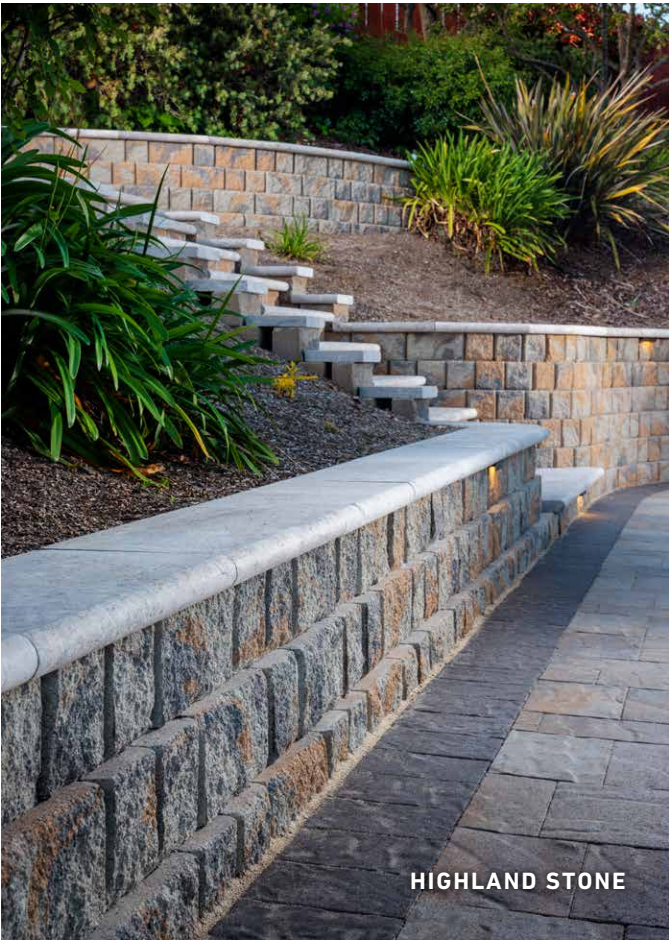

HIGHLAND STONE

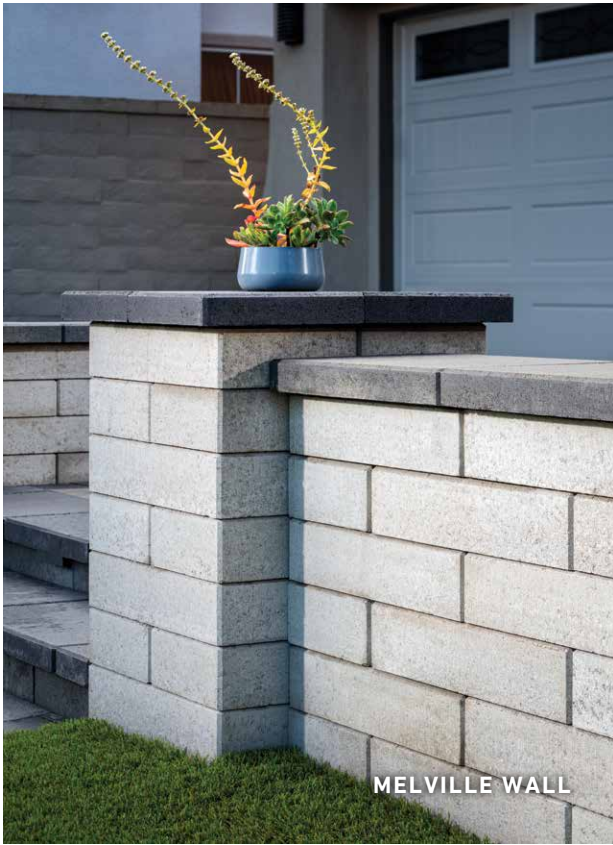


MELVILLE WALL



BELAIR WALL 2.0



DIAMOND PRO
STRAIGHT FACE

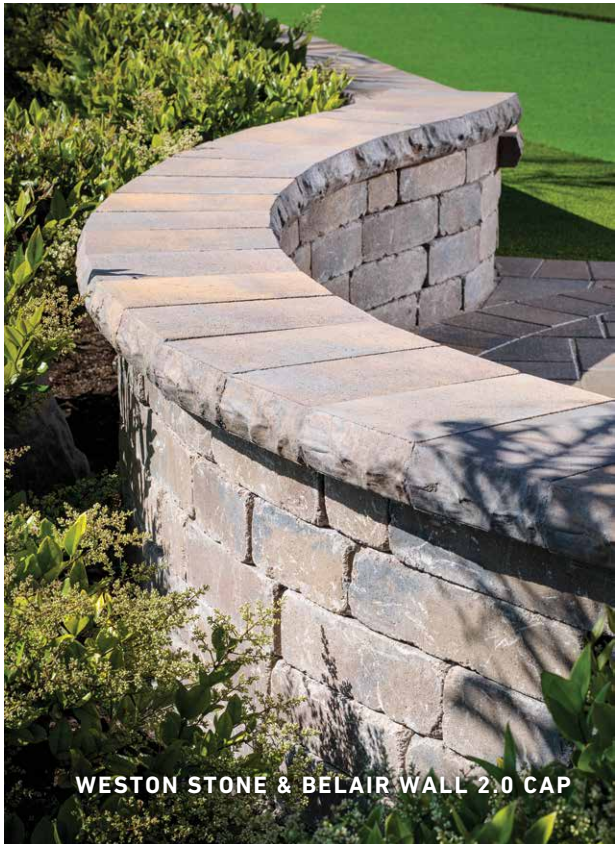






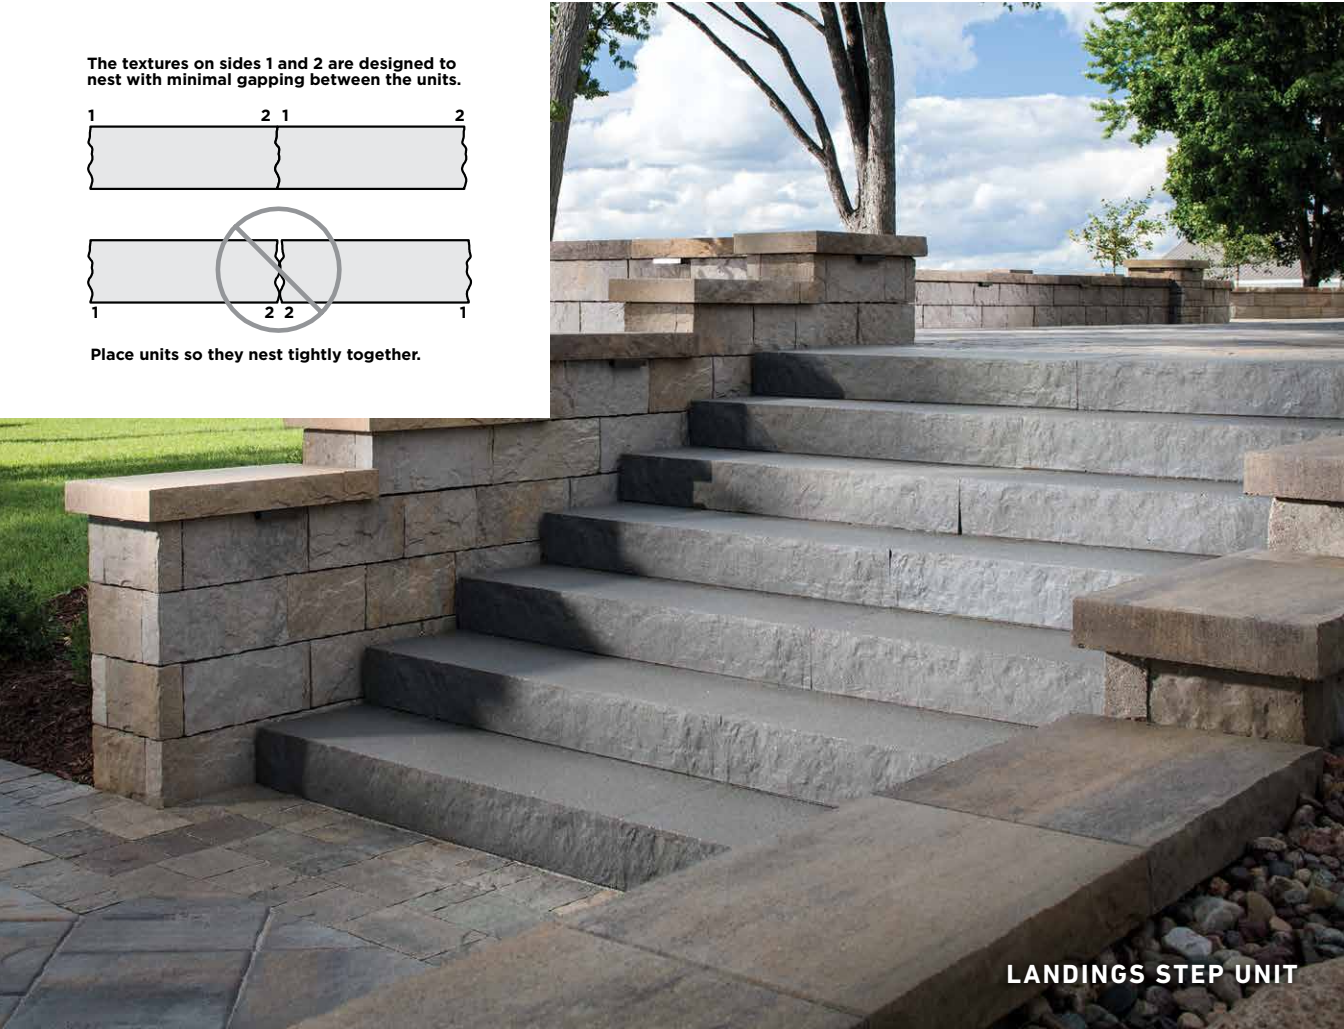
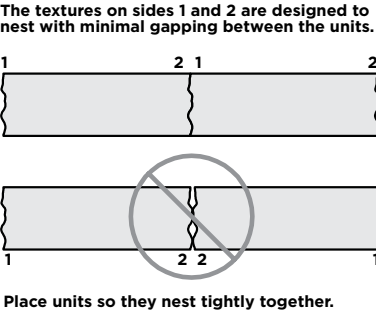
WESTON STONE & BELAIR WALL 2.0 CAP



VERTICA PRO BEVELED FACE

ACCESSORIES

| PRODUCT | SIZE | LN. FT. PER PALLET | PCS. PER PALLET | PALLET WEIGHT (LBS) |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------|-----------------|---------------------|
|  Anchor® Column Cap | 28 x 28 x 4" | - | 4 | 600 |
|  Anglia Edger® | 8" x 77⁄8" x 4½" 8" x 10½" x 4½" 8" x 15½" x 4½" 8" x 17⁄8" x 4½" | 69.75 | 60 | 2,556 |
|  Landings™ Step Unit | 6" x 48" x 18" | - | 6 | 2,565 |
|  Marina™ Coping | 6 x 12 x 2⅝" | 63 | 126 | 1,764 |
|  Melville™ Curb | 4" x 24" x 6½" | 96 | 48 | 2,449 |



LANDINGS STEP UNIT

PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PIOC system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



CPM LOCATION



4110 192nd St. East
Tacoma, WA 98446
Ph: 253-875-7080



BELGARDCOMMERCIAL.COM