

Designated for areas that are primarily for pedestrian

applications including commercial plazas that may require

occasional access for emergency or maintenance vehicles, as

Paver Applications

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.





Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

well as residential driveways. Occasional Heavy Vehicles

Pedestrian


Belgard Paver Colors & Finishes Offering



Belgard Commercial allows you to customize your project with optional finishes: Smooth, Shot Blast and Ground face. Contact your Belgard Commercial Rep for more information.

SUNSET RUST Shot Blast Shot Blast Smooth Ground Face Smooth Ground Face ALMOND DESERT Shot Blast Smooth Shot Blast Ground Face Smooth Ground Face TRUFFLE SUEDE Smooth Shot Blast Ground Face Smooth Shot Blast Ground Face DARK CHARCOAL / GRAPHITE GRAY / FOUNDRY Smooth Shot Blast Ground Face Smooth Shot Blast Ground Face

Blended Colors

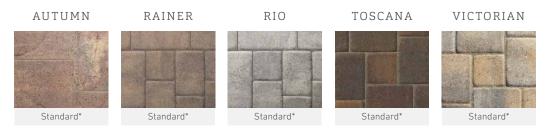

* Standard finish refers to the stock finish of a product which could be smooth or textured. Refer to product chart for individual products in standard finish.




ADA TRUNCATED DOME - AVAILABLE COLORS




Contact your Belgard Representative for custom finish options and sample products.

Dimensions	$\mathbb{S}^{\mathbb{T}}$ Series Ve	hicular 8	S Archi	tectural	Pavers										
					APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINIS	SHES		CHAMFER	SQ. FT. PER
UNITS		THICKNESS	SIZE	Ŕ		.		E		Smooth	Ground Face	Shot Blast	Tumbled	WIDTH	PALLET
1	3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm)
	3" x 18"	101.6 mm	3" x 18"	101.6 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	49.5
	3" x 24"	101.6 mm	3" x 24"	101.6 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	66
•	6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm		\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
\$	6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	112 (60 mm) 90 (80 mm)
	6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
\checkmark	9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80mm		\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	90
-	9" x 18"	60 mm	9" x 18"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	112.5
	12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm		\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
\diamond	12" x 12" ADA	60 mm	12" x 12"	60 mm				\checkmark		\checkmark				3 mm	120
~	12" x 18"	60 mm	12" x 18"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	120
	12" x 24"	60 mm	12" x 24"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	120
	15" x 30"	60 mm	15" x 30"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	93.75
\checkmark	18" x 24"	60 mm	18" x 24"	60 mm				\checkmark		\checkmark	\checkmark			3 mm	120
-	24" x 24"	60 mm	24" x 24"	60 mm				\checkmark		\checkmark	\checkmark			3 mm	80
Geometric S	hapes														
					APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINIS	SHES			
UNITS		THICKNESS	SIZE	Ŕ				F	~	Smooth	Ground Face	Shot Blast	Tumbled	CHAMFER WIDTH	SQ. FT. PER PALLET
	Diamond	60 mm	10¾" x 12"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	93.5
	Hexagon	60 mm	12"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	85.73
	12" Parallelogram	60 mm	3" x 12"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	114.31
	18" Parallelogram	60 mm	6" x 18"	60 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	100

Moduline Se	Moduline Series® Vehicular & Architectural Pavers														
					APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINI	SHES		CHAMEED	
UNITS	4" x 12" 80 mm	SIZE	Ŕ				Ŀ	BK	Smooth	Ground Face	Shot Blast	Tumbled	CHAMFER WIDTH	SQ. FT. PER PALLET	
	4" x 12"	80 mm	4" x 12"	80 mm	80mm			\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	85
	4" x 18"	80 mm	4" x 18"	80 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	36
	4" x 24"	80 mm	4" x 24"	80 mm				\checkmark		\checkmark	\checkmark	\checkmark		3 mm	48
	3-Piece	80 mm	6" x 6" 6" x 12" 12" x 12"	80 mm	80 mm			\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	3 mm	96
	5-Piece	80 mm	6" x 6", 6" x 9", 9" x 9", 6" x 12", 9" x 12"	80 mm	80 mm			\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	3 mm	96

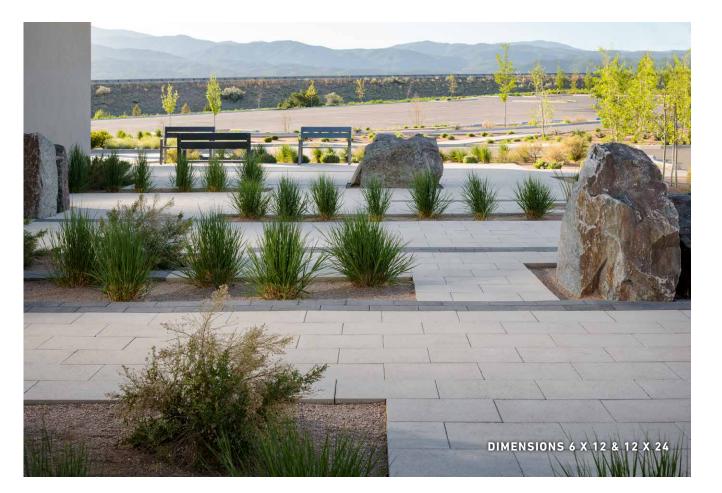

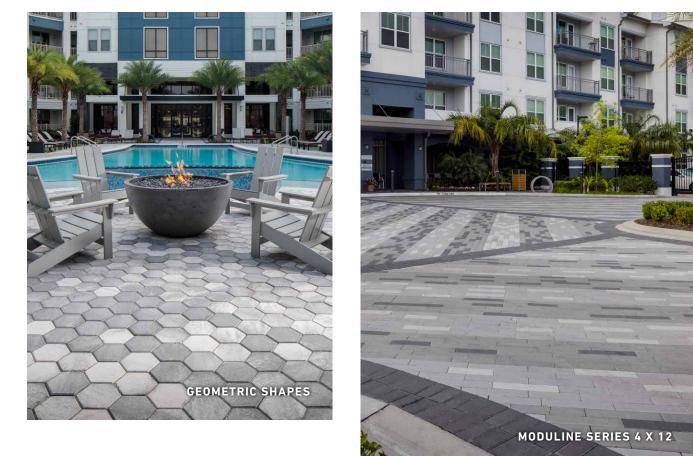

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times. Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Ve	hicula	r & Aro	chitectural Pavers	;																
							APPLIC	ATIONS		ADA*	MECH. INSTALL			FINISHES			CHAMFER	SQ. FT.	PCS. PER	PALLET
UNIT	S			THICKNESS	SIZE	Ŕ				E.		Textured	Smooth	Ground Face	Shot Blast	Tumbled	WIDTH	PER PALLET	PALLET	WEIGHT (LBS)
DIME	NSIONS [™] 3-	PIECE SYST	EM				ł			ł	ł	1	1		ł	4	l	ł		
٠	•		Dimensions [™] 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm				\checkmark			\checkmark				3 mm	120	40 40 40	3,348
•			Dimensions [™] 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				\checkmark			\checkmark				3 mm	112.5	20 10 20	3,152
ORIG	INS [™] 3-PIEC	E SYSTEM																		
			Origins [™] 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm				\checkmark		\checkmark					3 mm	120	40 40 40	3,348
			Origins [™] 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				\checkmark		\checkmark					3 mm	112.5	20 10 20	3,152
ADDI	TIONAL PRO	DUCTS																		
			Avalon Slate Border	60 mm	6" x 9"	60 mm				\checkmark		\checkmark				\checkmark	N/A	112	300	3,024
			Avalon Slate Large (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm				\checkmark		\checkmark				\checkmark	N/A	120	160	3,240
			Basalt™	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm						\checkmark					3 mm	112.5	20 10 20	3,202
			Belgian Cobble°	60 mm	7 irregular round sizes	60 mm							\checkmark				N/A	85	580	2,040
			Brooklyn™	60 mm	3" x 9"	60 mm						\checkmark					N/A	112.5	600	3,364
			Cambridge Cobble [®] (Square)	60 mm 80 mm	6" x 6"	60 mm	80 mm	80 mm		\checkmark			\checkmark			\checkmark	Rounded Chamfer	120 (60 mm) 96 (80 mm)	480 (60 mm) 384 (80 mm)	3,240 (60 mm) 3,580 (80 mm)
			Cambridge Cobble® (Rectangle)	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	\checkmark			\checkmark			\checkmark	Rounded Chamfer	112 (60 mm) 90 (80 mm)	300 (60 mm) 240 (80 mm)	3,024 (60 mm) 3,360 (80 mm)
			Catalina™ Grana Border	60 mm	6" x 9"	60 mm				\checkmark			\checkmark	\checkmark	\checkmark	\checkmark	4 mm	112	300	3,020
			Catalina™ Grana Large (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm				\checkmark			\checkmark	\checkmark	\checkmark	\checkmark	4 mm	120	160	3,230
			Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm						\checkmark					Rolled Edge	105	60 120 90	2,997

* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications. Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

**Contact your Belgard representative for availability

Vehicular & Arc	chitectural Pavers	s (Contir	nued)															
					APPLIC	TIONS		ADA*	MECH. INSTALL			FINISHES				SQ. FT.	PCS.	PALLET
UNITS		THICKNESS	SIZE	Ŕ				F		Textured	Smooth	Ground Face	Shot Blast	Tumbled	CHAMFER WIDTH	PER PALLET	PER PALLET	WEIGHT (LBS)
	Dublin Cobble° (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				\checkmark		\checkmark		\checkmark	\checkmark	\checkmark	N/A	114	480	3,041
	Dublin Cobble° (Large Square)	60 mm	9" x 9"	60 mm				\checkmark		\checkmark		\checkmark	\checkmark	\checkmark	N/A	106	200	2,964
	Empire	60 mm	3" x 12"	60 mm						\checkmark						110	440	3,056
	Holland Stone	60 mm 80 mm	4" x 4"	60 mm	80 mm	80 mm	80 mm	\checkmark			\checkmark	\checkmark	\checkmark	\checkmark	4 mm	88 (60 mm) 96 (80 mm)		2,475 (60 mm) 3450 (80 mm)
-	Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	\checkmark	80 mm		\checkmark	\checkmark	\checkmark	\checkmark	4 mm			3,240 (60 mm) 3,575 (80 mm)
	Mega-Arbel®	60 mm 80 mm	15%" x 21"	60 mm 80 mm				\checkmark		\checkmark					N/A	104.4 (60 mm) 78.3 (80 mm)		2,766(60 mm) 2,897 (80 mm)
	Papyrus [™] 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				\checkmark		\checkmark					3 mm	112.5	20 10 20	3,152
	Urbana® Stone (3 pc)	60 mm 80 mm	77/8" x 3 ¹⁵ /16" 77/8" x 77/8" 77/8" x 11 ¹³ /16"	60 mm 80 mm	80 mm			\checkmark		\checkmark				\checkmark	N/A	116.4 (60 mm) 105 (80 mm)		3,142 (60 mm) 3,814 (80 mm)
The second se	Urbana® Stone (Large Square)	60 mm 80 mm	11 ¹³ ⁄16" x 11 ¹³ ⁄16"	60 mm 80 mm	80 mm			\checkmark		\checkmark				\checkmark	N/A			3,138 (60 mm) 3,820 (80 mm)

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.












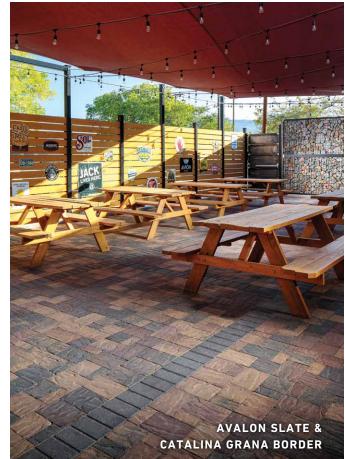

Permeable Pavers																			
				APPLI	CATIONS		ADA*	MECH. INSTALL			FINISHES			MANUF.	% SURFACE	CHAMFER	SQ. FT.	PCS. PER	PALLET
UNITS	THICKNESS	SIZE	Ŕ		.		Ŀ.		Textured	Smooth	Ground Face	Shot Blast	Tumbled	JOINT WIDTH	OPENING PER SQ. FT.	WIDTH	PER PALLET	PALLET	WEIGHT (LBS)
AQUALINE [™] SERIES																			
3" x 12"	80 mm	3" x 12"	80 mm	80 mm			\checkmark			\checkmark	\checkmark	\checkmark	\checkmark	7 mm	10%	3 mm	88	352	3,012
4.5" x 9"	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	10 mm	10%	3 mm	90	320	3,100
6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		\checkmark			\checkmark	\checkmark	\checkmark	\checkmark	7 mm	7%	3 mm	96	384	3,295
6" x 12"	80 mm 101.6 mm	6" x 12"	80 mm	80 mm	101.6 mm	101.6 mm	\checkmark	101.6 mm		\checkmark	\checkmark	\checkmark	\checkmark	7 mm	5%	3 mm	96 (80 mm) 69 (101 mm)	192 (80 mm) 144 (101 mm)	3,350 (80 mm) 2,867 (101 mm)
9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80 mm		\checkmark			\checkmark	\checkmark	\checkmark	\checkmark	10 mm	6%	3 mm	90	160	3,195
12" x 12"	80 mm	12" x 12"	80 mm	80 mm			\checkmark			\checkmark	\checkmark	\checkmark	\checkmark	7 mm	3%	3 mm	96	96	3,485
ADDITIONAL PRODUCT LINES																			
Aqua Dublin (3 pc)	80 mm	3½" x 6 ¹¹ /16" 6 ¹¹ /16" x 6 ¹¹ /16" 10¼" x 6 ¹¹ /16"	80 mm	80 mm			\checkmark	\checkmark		\checkmark	\checkmark	\checkmark	\checkmark	10 mm	10%	3 mm	92.4	288	3,240
Urbana® Stone* (3 pc)	60 mm 80 mm	77/8" x 3 ¹⁵ /16" 77/8" x 77/8" 77/8" x 11 ¹³ /16"	60 mm 80 mm	80 mm			\checkmark		\checkmark				\checkmark	Var. 4-10 mm	3%	N/A	116.4 (60 mm) 105 (80 mm)		3,142 (60 mm) 3,814 (80 mm)
Urbana® Stone* (Large Square)	60 mm 80 mm	11 ¹³ ⁄16" x 11 ¹³ ⁄16"	60 mm 80 mm	80 mm			\checkmark		\checkmark				\checkmark	Var. 4-10 mm	2%	N/A	116.25 (60 mm 105 (80 mm)		3,138 (60 mm) 3,820 (80 mm)

*Can be installed as a permeable paving system for residential and non-vehicular applications with proper open-graded aggregate bedding, base and joint material.


Concrete Grid Paveme	ents						· · ·							
				APPLIC	ATIONS	ADA	MECHANICAL INSTALL		FINIS	SHES	% SURFACE	SQ. FT.	PCS. PER	PALLET
UNITS	THICKNESS	SIZE	Ŕ			F		Smooth	Ground Face	Shot Blast Tumbled	OPENING	PER PALLET	PALLET	WEIGHT (LBS)
Turfstone™	80 mm	15¾" x 23%"	80 mm					\checkmark			40%	101	40	2,575










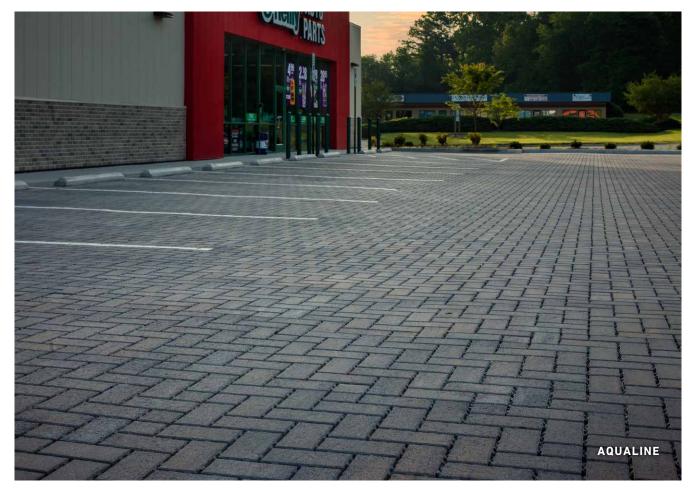

Porcelain Pavers									
					ADA	PEDESTAL	SQ. FT. PER	PCS. PER	PALLET
UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	Ł	APPLICATION	PALLET	PALLET	WEIGHT (LBS)
Glocal	Stone	3/4"	24" x 24"	Ideal, Type and Classic	\checkmark	\checkmark	232.5	60	2,160
Glocal	Concrete	3/4"	24" x 48"	Ideal, Type, Classic	\checkmark	\checkmark	271.25	35	2,621
Noon	Wood	3⁄4"	12" x 48"	Daylight, Ember, Honey	\checkmark	\checkmark	279	72	2,664
November	Stone	3⁄4"	24" x 24"	Rain, Wind, Warm, Land	\checkmark	\checkmark	232.5	60	2,160
Quarziti 2.0	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River, Mantle	\checkmark	\checkmark	232.5	60	2,160
Quarziti 2.0	Stone	3/4"	24" x 48"	Glacier, Mountains, Waterfall, River, Mantle	\checkmark	\checkmark	271.25	35	2,621
Unico	Stone	3/4"	13" x 23½"	Glacier, Mountains, Waterfall, River	\checkmark	\checkmark	254.82	120	2,080

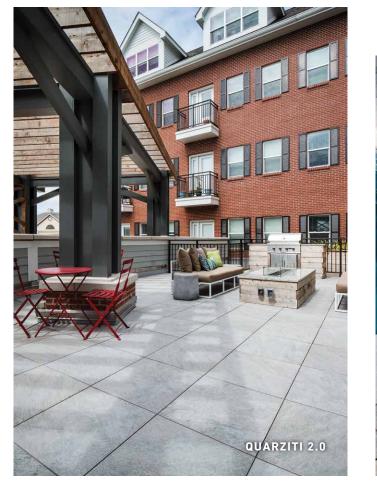











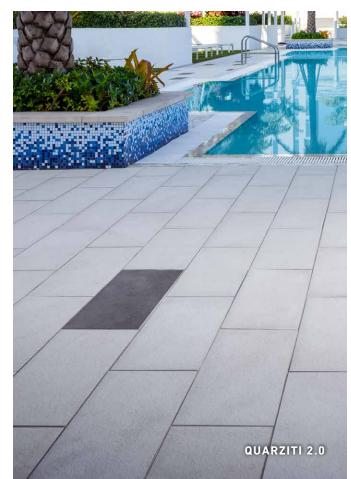


Segmental R	Retaining & F	reest	tanding	g Wal	ls (SRV	V & FSV	<i>I</i>)												
			UNIT SIZE		CONNECT	TION TYPE	ACCESS (SOLD SEPA			TEXTURE			FACE S	STYLES		BATTER/	SQ. FT.	PCS. PER	PALLET
UNITS		Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Tumbled	Straight	Beveled	Virtual Joint	Stone Cut	SETBACK	PER PALLET	PALLET	WEIGHT (LBS)
	Ashlar Tandem™	7"	13³⁄16", 15¹³⁄16", 187⁄16"	25⁄8"		Polypropylene Connectors		\checkmark	\checkmark							0 / 4°	70	90	2,032
	Belair Wall® 2.0 Freestanding Wall	6"	6", 10", 16"	5"			\checkmark	\checkmark	\checkmark			\checkmark				Vertical	30	120	2,939
	Belair Wall® 2.0 Retaining Wall	6"	6", 10", 16"	8"	Rear Lip		\checkmark	\checkmark	\checkmark			\checkmark				9°; 1" Per Course	30	60	2,250
	Diamond [®] 10D	6"	17¼"	10"	Rear Lip		\checkmark	\checkmark		\checkmark		\checkmark	\checkmark			10.6 Degree; 1.125" Per Course	39.4	54	2,916
	Diamond Pro®	8"	18"	12"	Rear Lip		\checkmark	\checkmark		\checkmark		\checkmark	\checkmark		\checkmark	7.1°; 1" Per Course	45	45	3,380
	Diamond Pro® Air Straight	8"	18"	12"	Rear Lip		\checkmark	\checkmark		\checkmark		\checkmark				4°	45	45	2,480
-	Diamond Pro® Air Smooth	8"	18"	12"	Rear Lip		\checkmark	\checkmark				\checkmark				4°	40	40	2,210
	Diamond Pro [®] Smooth	8"	18"	12"	Rear Lip		\checkmark	\checkmark				\checkmark				7.1°; 1" Per Course	45	45	3,380
	Diamond Pro [®] PS	8"	18"	12"		Fiberglass Pins		\checkmark		\checkmark		\checkmark	\checkmark		\checkmark	1.7° or 7.1°	45	45	3,380
	Highland Stone® SRW Small & Medum	6"	12", 6"	12"	Rear Lip		\checkmark	\checkmark		\checkmark		\checkmark				10.6°; 1.125" Per Course	33.75	45	3,875
CEAL OF	Highland Stone® SRW Large	6"	18"	12"	Rear Lip		\checkmark	\checkmark		\checkmark		\checkmark				10.6°; 1.125" Per Course	33.75	45	3,875
	Highland Stone® FSW Small & Medium	6"	12", 6"	9"			\checkmark	\checkmark		\checkmark		\checkmark				Vertical	32	40	2,630
ALC: NO	Highland Stone® FSW Large	6"	18"	9"			\checkmark	\checkmark		\checkmark		\checkmark				Vertical	30	40	2,850
	Highland Stone® 2.0 FSW	6"	6", 12", 18"	5"			\checkmark	\checkmark		\checkmark		\checkmark				Vertical	47.04	96	3,255
	Landmark 2.0	24"	48"	27.5"			\checkmark	\checkmark								3°	-	-	-
	Melville Tandem™	7"	13 ³ ⁄16", 15 ¹³ ⁄16", 18 ⁷ ⁄16"	25⁄8"		Polypropylene Connectors		\checkmark				\checkmark				0 / 4°	70	90	2,032
	Melville [™] Wall	4"	20"	10"				\checkmark				\checkmark				Vertical	26.67	48	3,120
	Melville [™] Wall Cap	2"	20"	12"				\checkmark				\checkmark				Vertical	120	70	3,100
	Shelton Wall™	6"	6", 12", 16"	10"		Fiberglass Pins		\checkmark			\checkmark	\checkmark				Vertical	26.67	48	3,120
Time	Vertica®	8"	18"	11"	Surface Lug			\checkmark		\checkmark		\checkmark	\checkmark	\checkmark		2°; 9/32" Setback & 4°, 1/2" Setback	45	45	3,825
	Weston Universal	4"	12"	8"							√**	\checkmark				Vertical	33.5	120	3,136

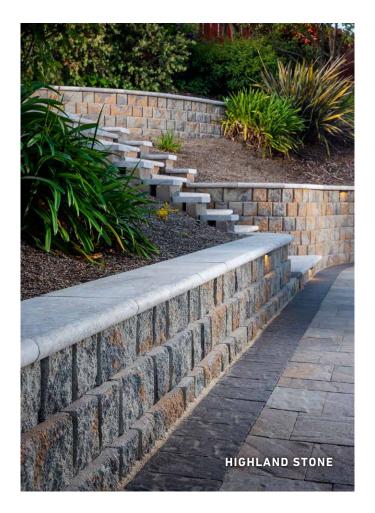







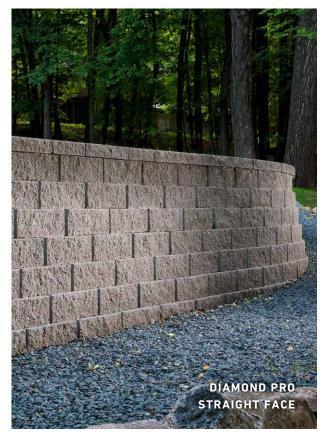



Rooftop Pavers & Pedestals

Possibilities are endless when designing and building pedestal decks using Belgard Commercial Pedestals. The pedestal system's elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building pedestal decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each pedestal paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific pedestal pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you're done – saving time and money.

SPECIFICATIONS

- Supports up to 1000 lbs.
- Maximum elevation up to 36" using couplers and braces
- · Impervious to water, mold & freeze-thaw
- Preassembled
- Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

RESOURCES AVAILABLE

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- Videos: planning, installation & more
- Take-off assistance
- Samples available
- Technical assistance
- Customer service











Model SE0 Adjusts from 11/4"- 11/2"

Model SE2 Model SE3 Adjusts from 2"- 3" Adjusts from 3"- 43/4"

Model SE4 Adjusts from 4³/₄" - 6³/₄"

Model SE5 Adjusts from 63/4"-81/2"







Model NM1 Model NM2 Adjusts from 1"- 11/2" Adjusts from 1¹/₂"- 2³/₄"

Model NM3 Adjusts from 21/3"- 4"

Model NM4 Adjusts from 31/2"- 61/3"

Model NM5 Adjusts from 6" - 101/2"

SEP-1 **Adjustable Key** 5" Extension





Model PR1 Adjusts from 1.2"- 2.55"

Model PR2 Adjusts to 6.1"

> Model PR3 Adjusts to 16"

	MODEL SE SUPPORTS	MODEL NM SUPPORTS	PEDESTAL PRIME SUPPORTS
Self Leveling Head	\checkmark		\checkmark
Fixed Head	\checkmark	\checkmark	\checkmark
Adjustable	\checkmark	\checkmark	\checkmark
Extendable w/ Coupler	\checkmark	\checkmark	\checkmark
Adjustment Key	\checkmark	\checkmark	\checkmark
Locking IPE Pins	\checkmark	\checkmark	\checkmark
Recycleable (LEED)	\checkmark	\checkmark	\checkmark
Loading Capacity	\checkmark	\checkmark	\checkmark
Integrated Extension Coupler			\checkmark





Rooftop Hyd	raPress	ed Sla	bs				
	PAVER	PAVER	APPLIC	ATIONS	ADA	SQ. FT. PER	PALLET
UNITS	THICKNESS	SIZE	Ŕ	ROOFTOPS & PLAZAS	F	PALLET	WEIGHT (LBS)
Texada 12 x 24	50 mm	12" x 24"	\checkmark	\checkmark	\checkmark	135	2,900
Texada 24 x 24	50 mm	24" x 24"	\checkmark	\checkmark	\checkmark	96	2,300
Ipe Wood Tile	1.69"	24" x 24"	\checkmark	\checkmark	\checkmark	176	990.88
Ipe Wood Tile	1.69"	24" x 48"	\checkmark	\checkmark	\checkmark	176	990.88
Cumaru Wood Tile	1.69"	24" x 24"	\checkmark	\checkmark	\checkmark	176	990.88
Cumaru Wood Tile	1.69"	24" x 48"	\checkmark	\checkmark	\checkmark	176	990.88
Bamboo Wood Tile	1.69"	24" x 24"	\checkmark	\checkmark	\checkmark	176	990.88
Bamboo Wood Tile	1.69"	24" x 48"	\checkmark	\checkmark	\checkmark	176	990.88
Itauba Wood Tile	1.69"	24" x 24"	\checkmark	\checkmark	\checkmark	176	990.88
Garapa Wood Tile	1.69"	24" x 24"	\checkmark	\checkmark	\checkmark	176	990.88
Tigerwood Wood Tile	1.69"	24" x 24"	\checkmark	\checkmark	\checkmark	176	990.88

Pedestals & Acc		
PRODUCT NAME	PRODUCT DESCRIPTION	PIECES PER CARTON
STAR-T	3/8" - 9/16" (10-15mm)	50
STAR-B	3/16" Extension (5mm)	50
SE0-P	1.125" - 1.5" (28-38mm)	40
SE1-P	1.5" - 2" (37.5-50mm)	30
SE2-P	2" - 3" (50-75mm)	25
SE3-P	3" - 4.75" (75-120mm)	25
SE4-P	4.75" - 6.75" (120-170mm)	25
SE5-P	6.75" - 8.5" (170-215mm)	25
SEP-1	5" Extension (127mm)	30
NM-1	1"-1.57" (25-40mm)	40
NM-2	1.57"-2.75" (40-70mm)	30
NM-3	2.36"-3.93" (60-100mm)	25
NM-4	3.54"-6.30" (90-160mm)	15
NM-5	5.90"-10.63" (150-270mm)	12
NM-EXT	5.7" Extension (145mm)	30
EH-12	1/2" Fixed (12mm)	250
EH-15	5/8" Fixed (16mm)	200
EH-20	3/4" Fixed (20mm)	150
RUB-14	1/4" Fixed RUBBER	150
RUB-38	3/8" Fixed RUBBER	150
RUB-PINS	1/4" Fixed w/ 4 Pins	100
PR1	1.2" - 2.55" Adjustable Pedestal	1 per box
PR2	6.1" Adjustable Pedestal	1 per box
PR3	16" Adjustable Pedestal	1 per box

Cubes (Planters/	Benches) & Cu	lbe Tops	
PRODUCT NAME	COMMON SIZES (CUSTOM SIZES AVAILABLE)	COLORS (CUSTOM COLORS AVAILABLE)	MINIMUM QTY
Powder Coated Aluminum Cube	24"L x 24"H x 20"H 24"L x 24"H x 36"H 48"L x 24"H x 20"H 48"L x 24"H x 20"H	Red, Black, White, Charcoal, Silver, Bronze, Zinc*	1
Ipe Cube	24"L x 24"H x 16.5"H 48"L x 24"H x 16.5"H	Brown (Natural variations to be expected)	1


Brown (Natural variations to be expected)

24"L x 24" H 48"L x 24"H

Іре Тор

1



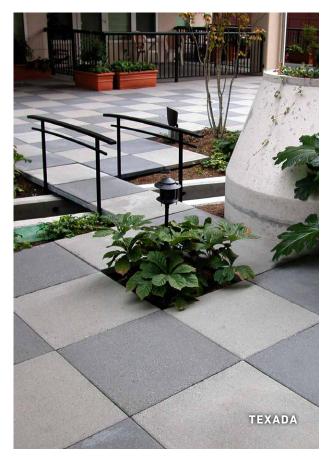



TEXADA



PLAZA SLAB




WOOD PAVERS




NOTICE: Colors subject to change without prior notice. Colors in this brochure may vary from current stock. Actual samples are available from Belgard Commercial. Slight variations in color may occur during manufacturing. Slight scuffing may occur during handling.

Accessories					
PRODUCT		SIZE	LN. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
	Anchor° Column Cap	28 x 28 x 4"	-	4	600
	Anglia Edger°	8" x 77%" x 4½" 8" x 10½" x 4½" 8" x 15½" x 4½" 8" x 15½" x 4½" 8" x 17%" x 4½"	69.75	60	2,556
	Artforms [™]	3" x 18" x 36"	-	18	2,745
	Artforms [™]	3" x 6" x 36"	-	21	1,095
AND THE OWNER THE TRUE	Landings [™] Step Unit	6" x 48" x 18"	-	6	2,565
	Marina [™] Coping	6 x 12 x 2¾"	63	126	1,764
	Melville [™] Curb	4" x 24" x 6½"	96	48	2,449
	Moduline Truncated Dome	12" x 12" x 2¾"	-	120	3,338

The textures on sides 1 and 2 are designed to nest with minimal gapping between the units.



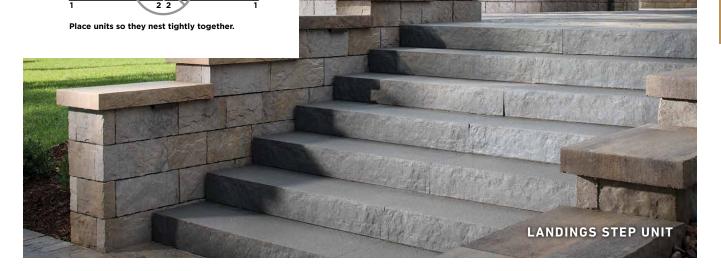

Professional Support



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.

CPM Location



4110 192nd St. East Tacoma, WA 98446 Ph: 253-875-7080



For your convenience, Belgard offers a

constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.









BELGARDCOMMERCIAL.COM

©2025 Oldcastle APG, Inc. All Rights Reserved. BELCOMM25-D-372100