


BELGARD®

Commercial Product Offering

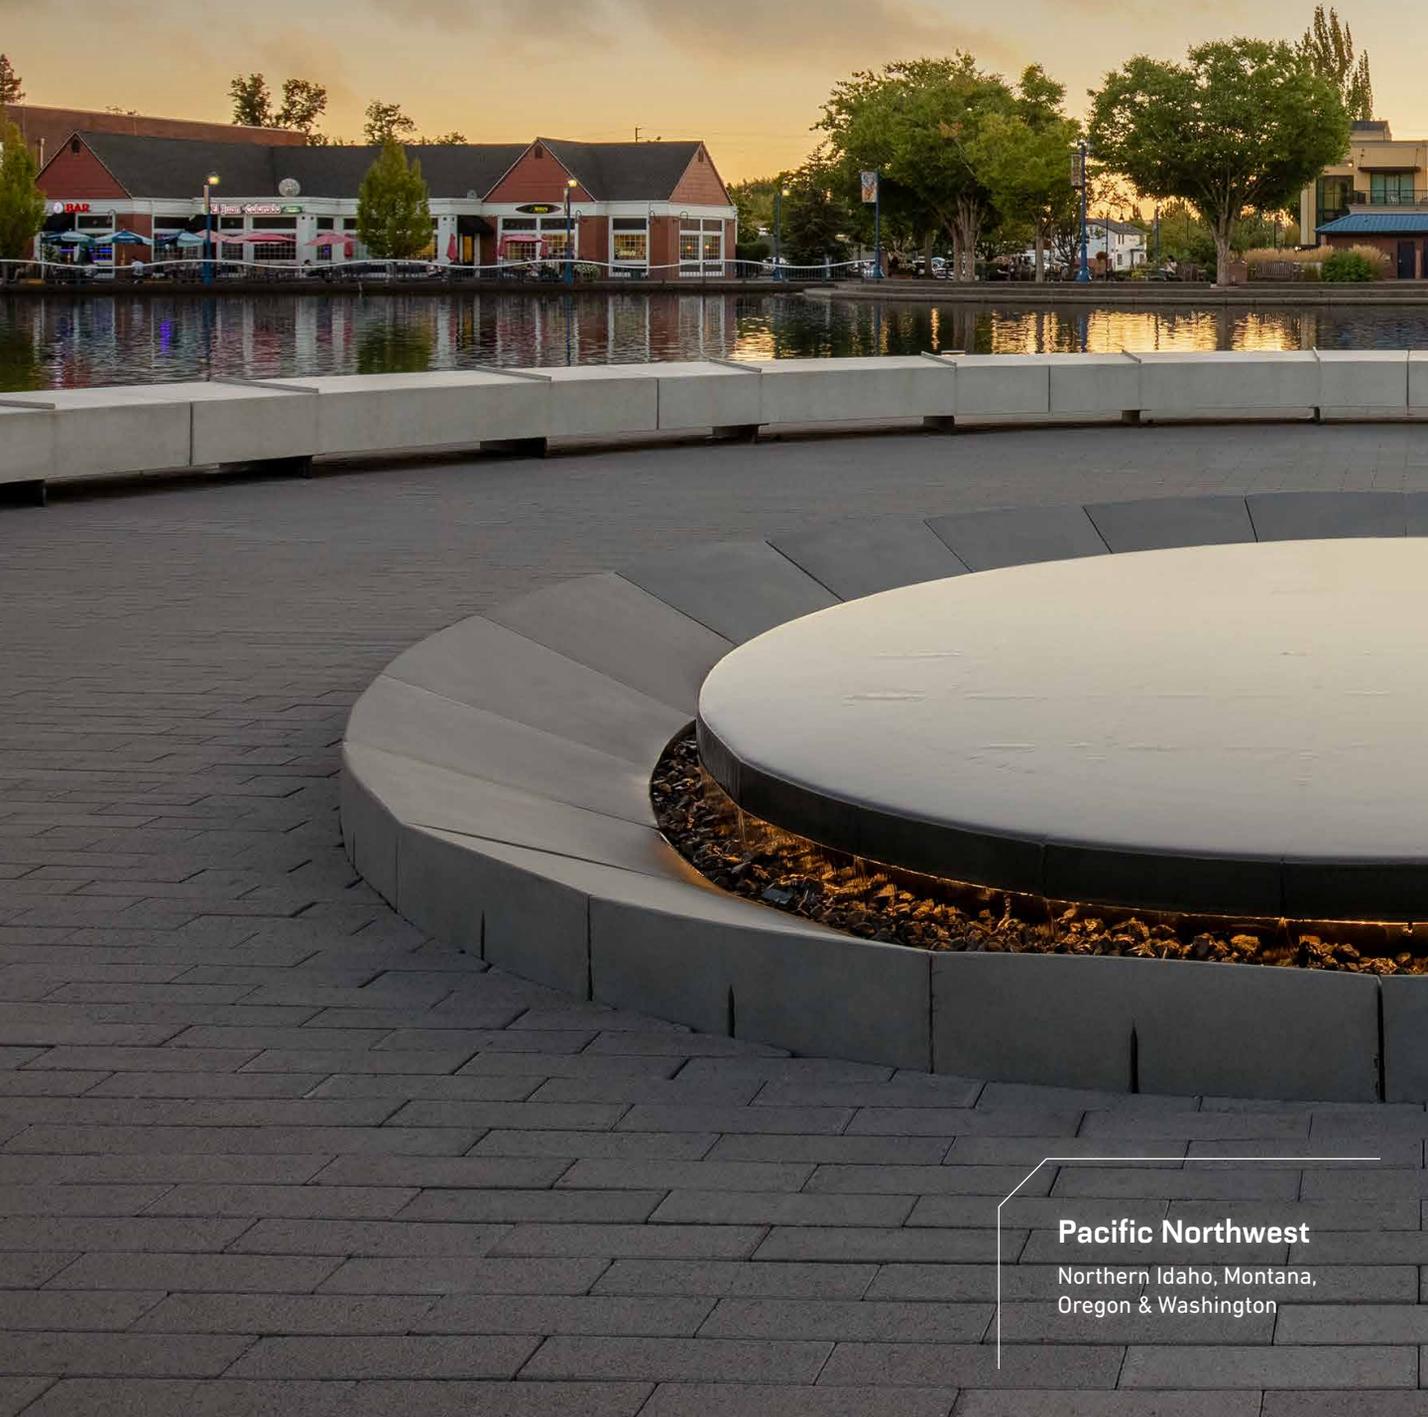


Pacific Northwest

Northern Idaho, Montana,
Oregon & Washington


HOW TO SELECT THE RIGHT PAVER FOR YOUR APPLICATION

The following icons provide general recommendations for both standard and permeable paving products. A pavement design professional should confirm that the product selected is suitable for the site-specific conditions such as subgrade soil properties, slope, drainage conditions, and traffic loading.

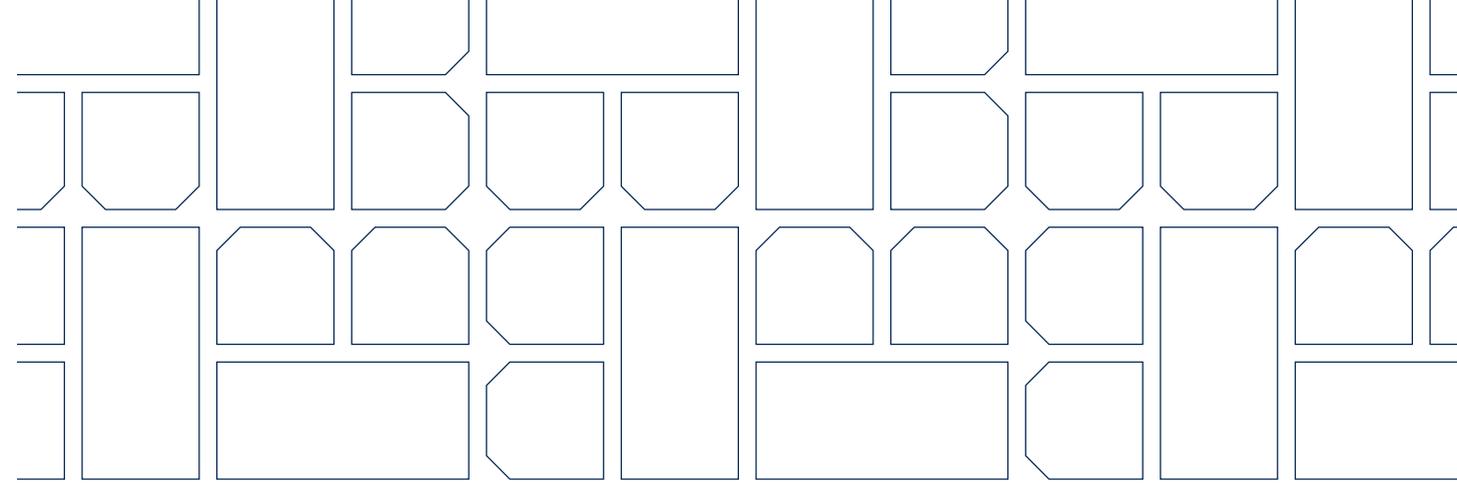

PEDESTRIAN

Designated for areas that are pedestrian only – walkways, patios and other pavement areas not subjected to any vehicular traffic. **All** Belgard paver and slab products are suitable for this application.

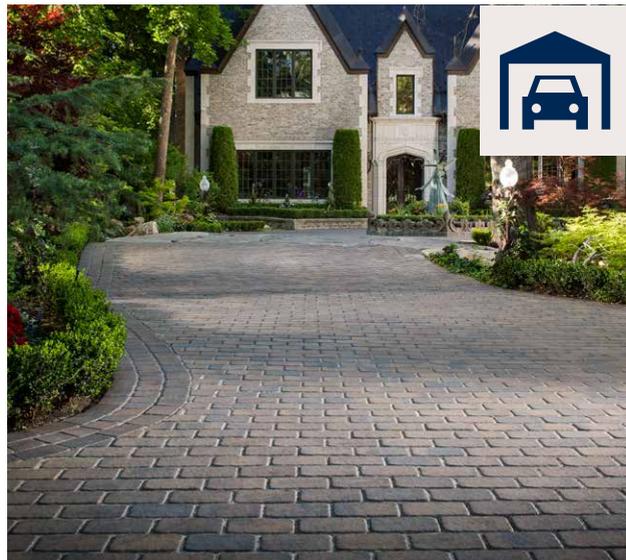

RESIDENTIAL DRIVEWAYS

Pavements used primarily for residential driveways, but also includes golf cart paths, commercial plazas, courtyards and pathways exposed to only light maintenance equipment, including infrequent heavy fire truck or maintenance equipment. Belgard pavers with a **minimum thickness of 60mm and a maximum aspect ratio of 4:1** are suitable for this application. 60mm multi-piece paver systems up to 12" in length are also acceptable for residential driveways with an appropriate base dependent on site conditions. 80mm thick slabs up to a length of 18 inches can be used in residential driveways subjected to only cars with adequate base thickness and subgrade soil strength. Typical lifetime ESALs should be < 7,500 maximum and heavy vehicles must be < 1 per day on average.



LIGHT VEHICULAR

Pavements used for low-traffic municipal or commercial parking lots, including access ways where only cars and light trucks are anticipated. Belgard pavers with a **minimum thickness of 80mm and a maximum aspect ratio of 4:1** are suitable for this application. Typical lifetime ESALs must be < 30,000 ESALs and maximum heavy vehicles should be < 5 per day on average.



HEAVY VEHICULAR

Pavements designated for regular vehicular traffic, including commercial parking lots, access roads where heavy vehicles are a regular component of the daily traffic volume. Belgard pavers with a **minimum thickness of 80mm and a maximum ratio of 3:1** are suitable for this application. Herringbone laying pattern is recommended on all roadways. Typical lifetime ESALs typically are > 30,000 ESALs and > 5 heavy vehicles per day.

The information set forth herein is for general informational purposes only. All such information is provided in good faith, however Oldcastle APG, Inc. and its affiliates make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability or completeness of any of the information and shall have no liability to any party for loss or damage incurred as a result of the use or reliance on any information provided herein. Any use of the information is at the user's sole risk.

COLORS & FINISHES OFFERING



Belgard Commercial allows you to customize your project with optional finishes: Smooth, Shot Blast and Ground face. Contact your Belgard Commercial Rep for more information.

SMOOTH SHOT BLAST GROUND FACE

Sunset



SMOOTH

Rust



SMOOTH

Almond



SMOOTH

Desert



SMOOTH

Suede



SMOOTH

Truffle



SMOOTH

Dark Charcoal / Graphite



SMOOTH

Gray / Foundry



SMOOTH

DuraFusion® Colors

Solids					
	PEARL	FOG	MIDNIGHT	BOURBON	ROSEWOOD
Tone-on-Tones					
	SCANDINA GRAY	SHADED GRAY	ANTHRACITE	SEPIA	HICKORY
Blends					
	CHESWICK	NEWPORT GRAY	IRON BAY	ASHWOOD	TEAK

Blended Colors

AUTUMN	RAINIER	RIO	VICTORIAN

ADA Truncated Dome - Available Colors



GRAPHITE

Contact your Belgard Representative for custom finish options and sample products.

DuraFusion® Technology

- ✓ Bold, vibrant color that resists fading
- ✓ High-definition finish for a smoother, tighter texture
- ✓ Engineered to withstand unpredictable weather and freeze-thaw conditions

Dimensions™ Series Vehicular & Architectural Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECH. INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
											Smooth	Ground Face				
 3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	80 mm	101.6 mm	✓		✓	✓	✓	✓	3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm)	-	-
 3" x 18"	101.6 mm	3" x 18"	101.6 mm				✓		✓	✓	✓		3 mm	49.5	-	-
 3" x 24"	101.6 mm	3" x 24"	101.6 mm				✓		✓	✓	✓		3 mm	66	-	-
 6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	60 mm 80 mm	80 mm 101.6 mm		✓		✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	-	-
 6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	✓		✓	✓	✓	✓	3 mm	112 (60 mm) 90 (80 mm)	300 (60 mm)	3020 (60 mm)
 6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	80 mm	101.6 mm	✓		✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	-	-
 9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80mm		✓		✓	✓	✓	✓	3 mm	90	-	-
 9" x 18"	60 mm	9" x 18"	60 mm				✓		✓	✓	✓		3 mm	112.5	100	3139
 12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm		✓		✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	-	-
 12" x 12" ADA	60 mm	12" x 12"	60 mm				✓		✓				3 mm	120	-	-
 12" x 18"	60 mm	12" x 18"	60 mm				✓		✓	✓	✓		3 mm	120	-	-
 12" x 24"	60 mm	12" x 24"	60 mm				✓		✓	✓	✓		3 mm	120	60	3230
 15" x 30"	60 mm	15" x 30"	60 mm				✓		✓	✓	✓		3 mm	93.75	30	2619
 18" x 24"	60 mm	18" x 24"	60 mm				✓		✓	✓			3 mm	120	-	-
 24" x 24"	60 mm	24" x 24"	60 mm				✓		✓	✓			3 mm	80	20	2454
 24" x 30"	60 mm	24" x 30"	60 mm				✓		✓	✓			3 mm	100	-	-
 24" x 36"	60 mm	24" x 36"	60 mm				✓		✓	✓			3 mm	120	-	-

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.



Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Geometric Shapes

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECH. INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
											Smooth	Ground Face				
 Diamond	60 mm	12"	60 mm				✓		✓	✓	✓		3 mm	93.5	108	2664
 Hexagon 6	60 mm	6"	60 mm	60 mm			✓		✓	✓	✓		3 mm	85.73	-	-
 12" Parallelogram	60 mm	3" x 12"	60 mm				✓		✓	✓	✓		3 mm	114.31	396	2392
 18" Paralleloggram	60 mm	6" x 18"	60 mm				✓		✓	✓	✓		3 mm	100	176	3225

Moduline Series® Vehicular & Architectural Pavers

 4" x 12"	80 mm	4" x 12"	80 mm	80mm			✓		✓	✓	✓	✓	3 mm	85	-	-
 4" x 18"	80 mm	4" x 18"	80 mm				✓		✓	✓	✓		3 mm	36	-	-
 4" x 24"	80 mm	4" x 24"	80 mm				✓		✓	✓	✓		3 mm	48	-	-
 3-Piece	80 mm	6" x 6" 6" x 12" 12" x 12"	80 mm	80 mm	80 mm		✓		✓	✓	✓	✓	3 mm	96	-	-
 5-Piece	80 mm	6" x 6", 6" x 9", 9" x 9", 6" x 12", 9" x 12"	80 mm	80 mm	80 mm		✓	✓	✓	✓	✓	✓	3 mm	96	-	-

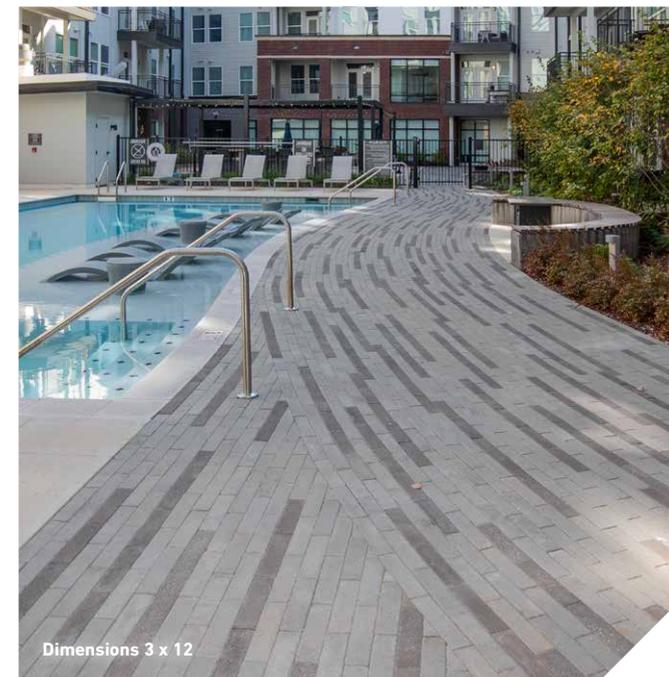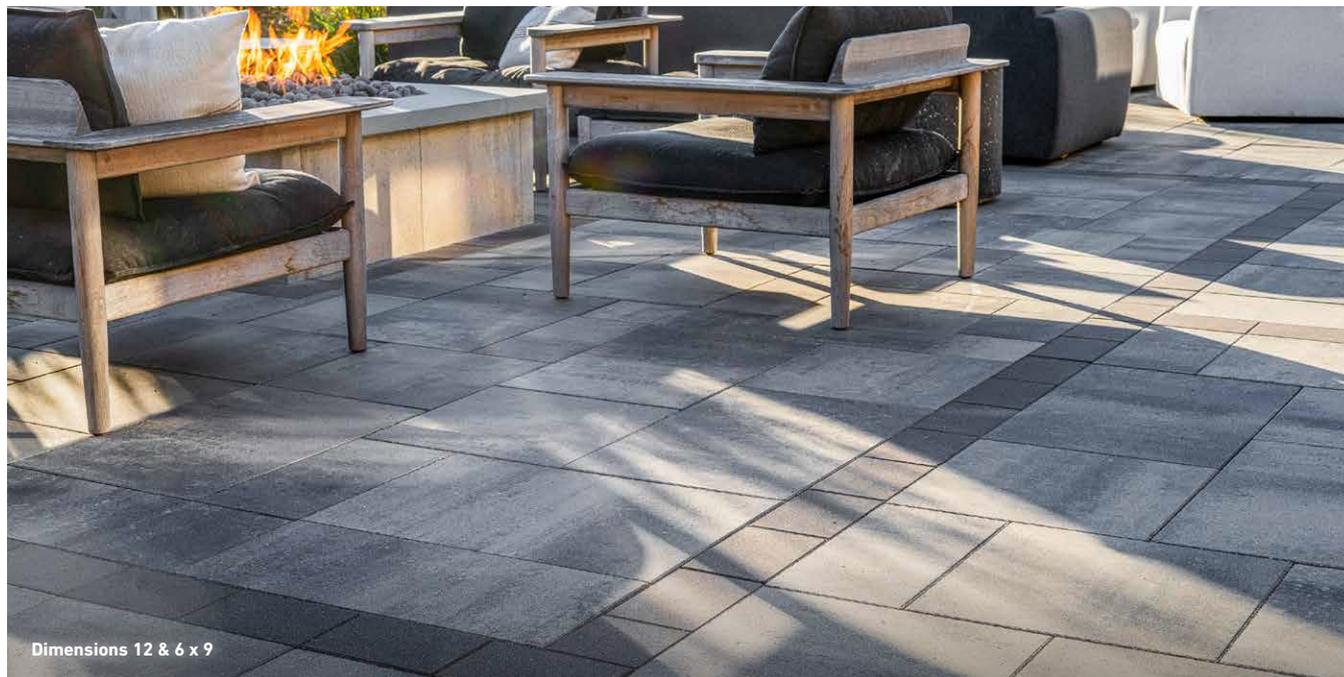

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Vehicular & Architectural Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
								Textured	Smooth	Ground Face	Shot Blast	Tumbled				
DIMENSIONS™ 3-PIECE SYSTEM																
 Dimensions™ 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm				✓	✓					3 mm	120	40 40 40	3,348
 Dimensions™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓	✓					3 mm	112.5	20 10 20	3,152
ORIGINS™ 3-PIECE SYSTEM																
 Origins™ 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm				✓	✓					3 mm	120	40 40 40	3,348
 Origins™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓	✓					3 mm	112.5	20 10 20	3,152
ADDITIONAL PRODUCTS																
 Avalon Slate Border	60 mm	6" x 9"	60 mm	60 mm			✓	✓				✓	N/A	112	300	3,024
 Avalon Slate Large (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm	60 mm			✓	✓				✓	N/A	120	160	3,240
 Basalt™	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓					3 mm	112.5	20 10 20	3,202
 Belgian Cobble*	60 mm	7 irregular round sizes	60 mm	60 mm					✓				N/A	85	580	2,040
 Brooklyn™	60 mm	3" x 9"	60 mm	60 mm				✓					N/A	112.5	600	3,364
 Cambridge Cobble* (Square)	60 mm 80 mm	6" x 6"	60 mm	60 mm 80 mm	80 mm				✓			✓	Rounded Chamfer	120 (60 mm) 96 (80 mm)	480 (60 mm) 384 (80 mm)	3,240 (60 mm) 3,580 (80 mm)
 Cambridge Cobble* (Rectangle)	60 mm 80 mm	6" x 9"	60 mm	60mm 80 mm	80 mm 80 mm				✓			✓	Rounded Chamfer	112 (60 mm) 90 (80 mm)	300 (60 mm) 240 (80 mm)	3,024 (60 mm) 3,360 (80 mm)
 Catalina™ Grana Border	60 mm	6" x 9"	60 mm	60 mm			✓		✓	✓	✓	✓	4 mm	112	300	3,020
 Catalina™ Grana Large (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm	60 mm			✓		✓	✓	✓	✓	4 mm	120	160	3,230
 Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm	60 mm				✓					Rolled Edge	105	60 120 90	2,997

* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

**Contact your Belgard representative for availability

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Vehicular & Architectural Pavers (Continued)

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECH. INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
											Textured	Smooth	Ground Face				
 Dublin Cobble® (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm	60 mm					✓		✓	✓	✓	N/A	114	480	3,041
 Dublin Cobble® (Large Square)	60 mm	9" x 9"	60 mm	60 mm					✓		✓	✓	✓	N/A	106	200	2,964
 Empire	60 mm	3" x 12"	60 mm	60 mm					✓					-	110	440	3,056
 Holland Stone	60 mm 80 mm	4" x 4"	60 mm	60 mm 80 mm	80 mm	80 mm	✓			✓	✓	✓	✓	4 mm	88 (60 mm) 96 (80 mm)	- 432 (80 mm)	2,475 (60 mm) 3,450 (80 mm)
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	60 mm 80 mm	80 mm	80 mm	✓	80 mm		✓	✓	✓	✓	4 mm	120 (60 mm) 96 (80 mm)	540 (60 mm) 432 (80 mm)	3,240 (60 mm) 3,575 (80 mm)
 Mega-Arbel®	60 mm 80 mm	15 ³ / ₈ " x 21"	60 mm 80 mm						✓					N/A	104.4 (60 mm) 78.3 (80 mm)	72 (60 mm) 54 (80 mm)	2,766 (60 mm) 2,897 (80 mm)
 Papyrus™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓		✓					3 mm	112.5	20 10 20	3,152
 Urbana® Stone** (3 pc)	60 mm 80 mm	7 ⁷ / ₈ " x 3 ¹⁵ / ₁₆ " 7 ⁷ / ₈ " x 7 ⁷ / ₈ " 7 ⁷ / ₈ " x 11 ¹³ / ₁₆ "	60 mm 80 mm	60 mm 80 mm	80 mm		✓		✓				✓	N/A	116.4 (60 mm) 105 (80 mm)	270 (60 mm) 243 (80 mm)	3,142 (60 mm) 3,814 (80 mm)
 Urbana® Stone** (Large Square)	60 mm 80 mm	11 ¹³ / ₁₆ " x 11 ¹³ / ₁₆ "	60 mm 80 mm	60 mm 80 mm	80 mm		✓		✓				✓	N/A	116.25 (60 mm) 105 (80 mm)	120 (60 mm) 108 (80 mm)	3,138 (60 mm) 3,820 (80 mm)

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

**Can be installed as a permeable paving system for residential and non-vehicular applications with proper open-graded aggregate bedding, base and joint material.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



Holland Stone



**EXPLORE
MORE
PAVERS**




Catalina Grana



Brooklyn



Papyrus 18

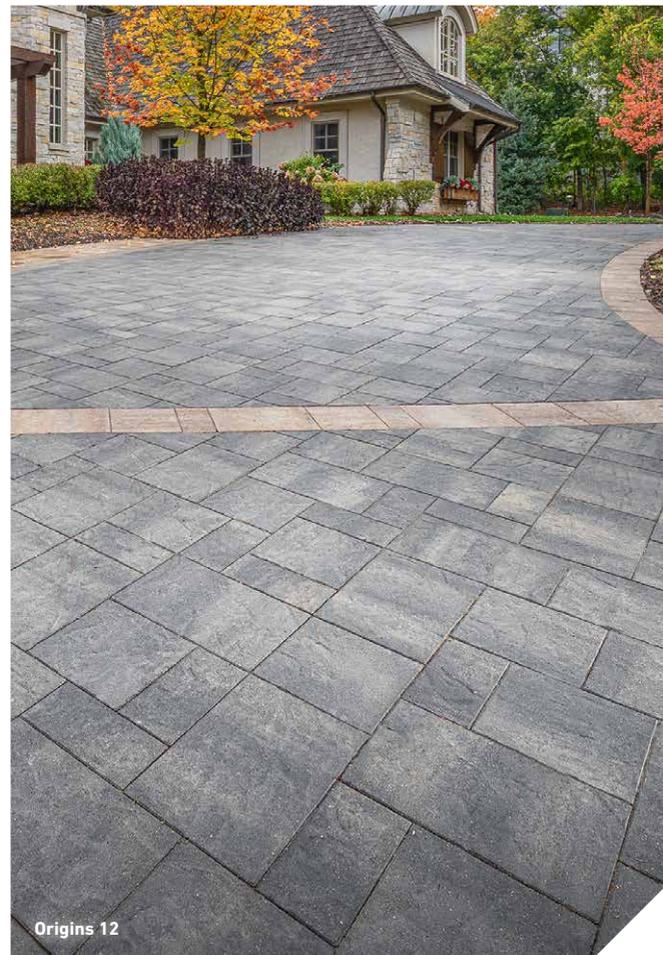

Origins 12



Empire

Permeable Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECH. INSTALL	FINISHES					MANUF. JOINT WIDTH	% SURFACE OPENING PER SQ. FT.	CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
											Textured	Smooth	Ground Face						
AQUALINE™ SERIES																			
 3" x 12"	80 mm	3" x 12"	80 mm	80 mm	80 mm		✓			✓	✓	✓	✓	7 mm	10%	3 mm	88	352	3,012
 4.5" x 9"	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓	✓		✓	✓	✓	✓	10 mm	10%	3 mm	90	320	3,100
 6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓			✓	✓	✓	✓	7 mm	7%	3 mm	96	384	3,295
 6" x 12"	80 mm 101.6 mm	6" x 12"	80 mm	80 mm	80 mm	101.6 mm	✓	101.6 mm		✓	✓	✓	✓	7 mm	5%	3 mm	96 (80 mm) 69 (101 mm)	192 (80 mm) 144 (101 mm)	3,350 (80 mm) 2,867 (101 mm)
 9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80 mm		✓			✓	✓	✓	✓	10 mm	6%	3 mm	90	160	3,195
 12" x 12"	80 mm	12" x 12"	80 mm	80 mm	80 mm		✓			✓	✓	✓	✓	7 mm	3%	3 mm	96	96	3,485
ADDITIONAL PRODUCT LINES																			
 Aqua Dublin (3 pc)	80 mm	3½" x 6¼" 6¼" x 6¼" 10¼" x 6¼"	80 mm	80 mm	80 mm		✓	✓		✓	✓	✓	✓	10 mm	10%	3 mm	92.4	288	3,240

Concrete Grid Pavements

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECH. INSTALL	FINISHES				% SURFACE OPENING	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
											Smooth	Ground Face				
 Turfstone™	80 mm	15¾" x 23¾"	80 mm	80 mm					✓				40%	101	40	2,575

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.


Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



Aqualine




**EXPLORE MORE
PERMEABLE
PAVERS**

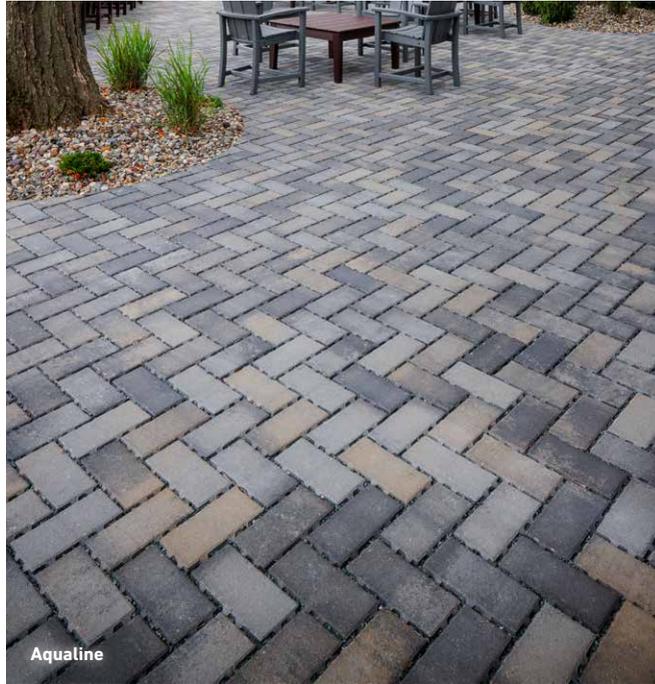


Aqualine



Aqualine

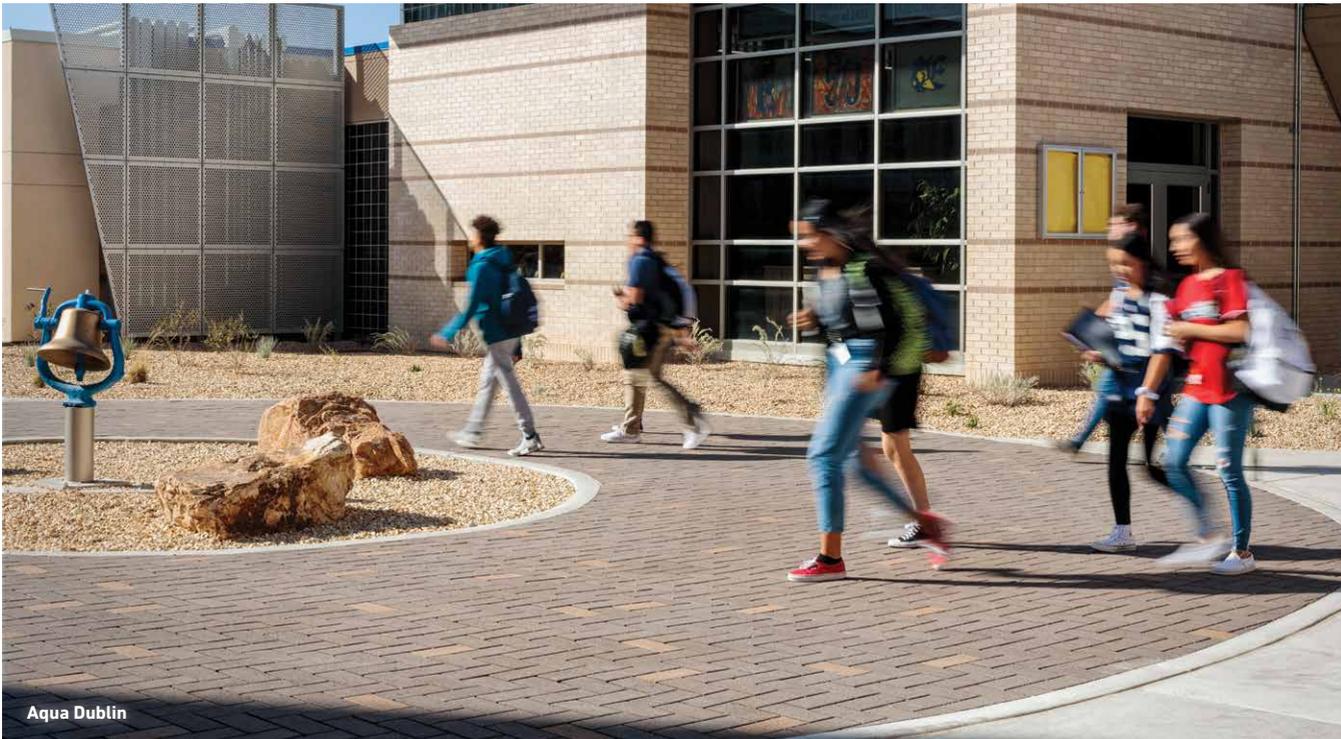

Aqua Dublin

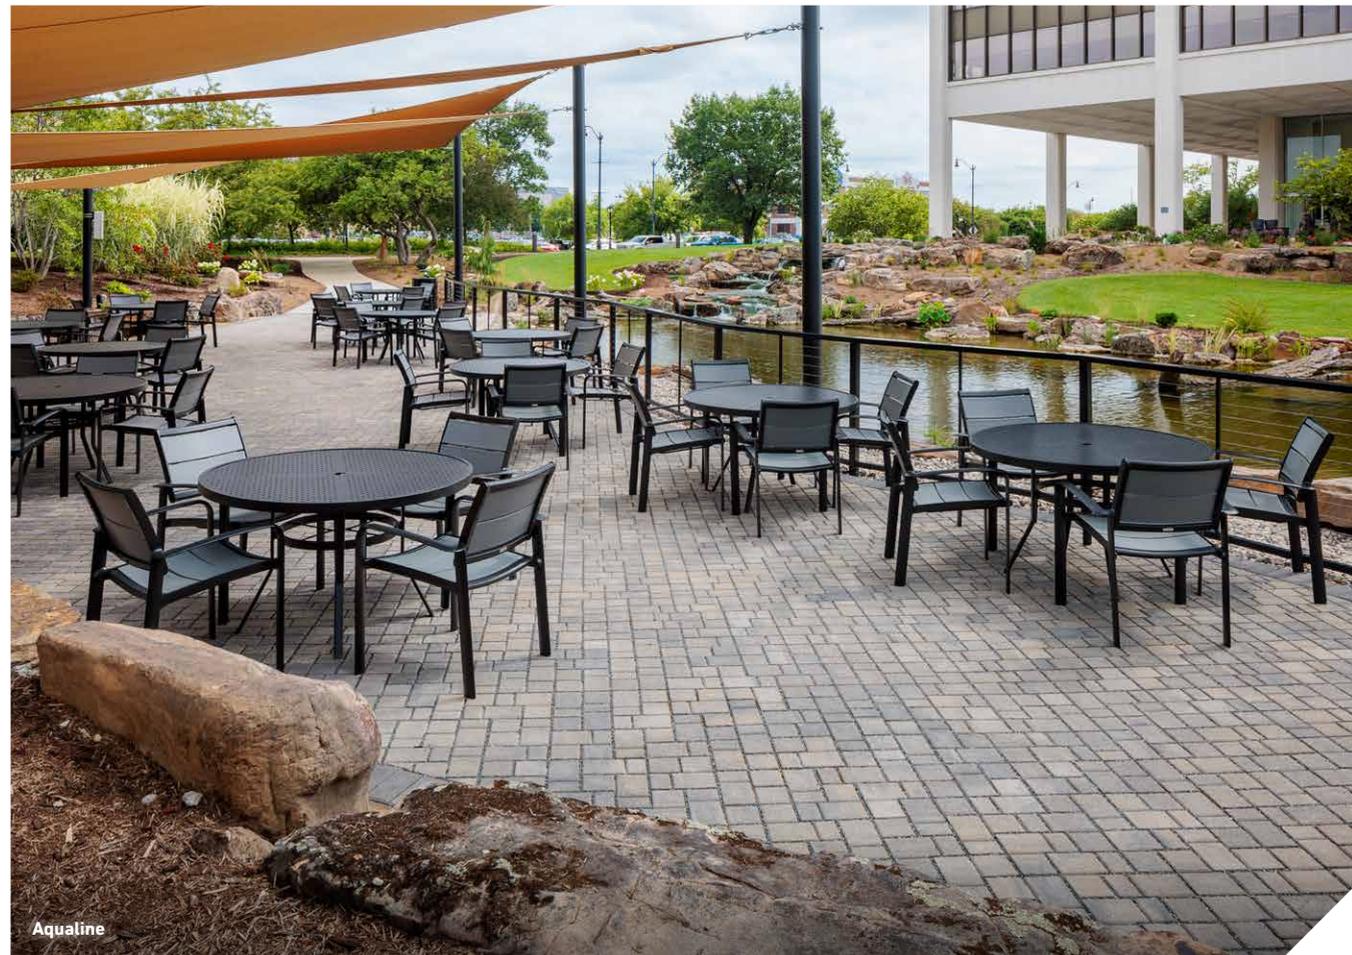

Aqualine

Porcelain Pavers

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									
 Glocal	Stone	¾"	24" x 24"	Ideal, Type and Classic	✓	✓	232.5	60	2,160
 Glocal	Concrete	¾"	24" x 48"	Ideal, Type, Classic	✓	✓	271.25	35	2,621
 Noon	Wood	¾"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,664
 November	Stone	¾"	24" x 24"	Rain, Wind, Warm, Land	✓	✓	232.5	60	2,160
 Quarziti 2.0	Stone	¾"	24" x 24"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	232.5	60	2,160
 Quarziti 2.0	Stone	¾"	24" x 48"	Glacier, Mountains, Waterfall, River, Mantle	✓	✓	271.25	35	2,621
 Unico	Stone	¾"	13" x 23½"	Glacier, Mountains, Waterfall, River	✓	✓	254.82	120	2,080

If installing on elevated surface over ¾" all porcelain must have a factory applied fiber mesh backing.
 Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit Belgard.com/porcelain for additional installation details.



Quarziti 2.0

 EXPLORE MORE
PORCELAIN
PAVERS



Unico




November




Glocal



Glocal

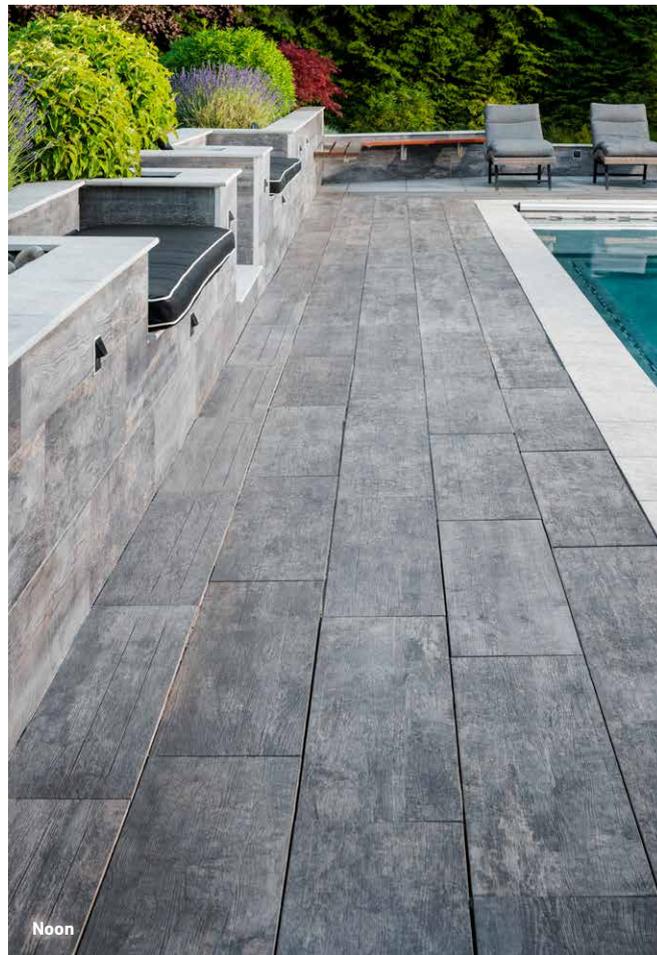

Noon

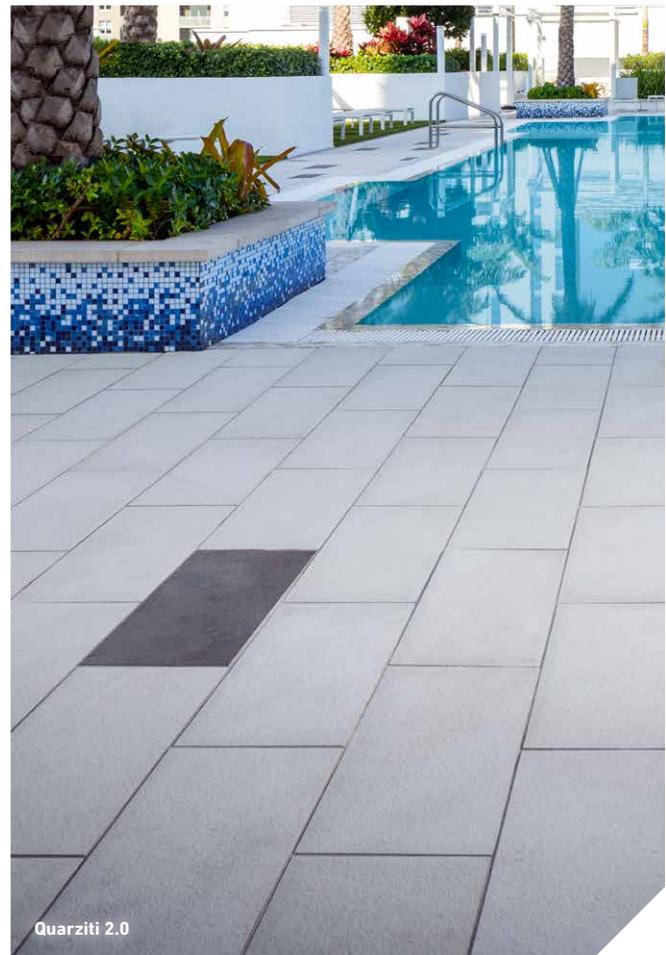

Quarziti 2.0

Segmental Retaining & Freestanding Walls (SRW & FSW)


UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES (SOLD SEPARATELY)		TEXTURE			AVAILABLE FACE STYLES				BATTER/ SETBACK	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Tumbled	Straight	Beveled	Smooth	Stone Cut				
 Ashlar Tandem™	7"	13 ³ / ₁₆ ", 15 ¹ / ₁₆ ", 18 ¹ / ₁₆ "	2 ⁵ / ₈ "		Polypropylene Connectors		✓	✓							0 / 4°	70	90	2,032
 Belair Wall® 2.0 Freestanding Wall	6"	6", 10", 16"	5"			✓	✓	✓			✓				Vertical	30	120	2,939
 Belair Wall® 2.0 Retaining Wall	6"	6", 10", 16"	8"	Rear Lip		✓	✓	✓			✓				9°; 1" Per Course	30	60	2,250
 Diamond® 10D	6"	17 ¹ / ₄ "	10"	Rear Lip		✓	✓		✓		✓	✓			10.6 Degree; 1.125" Per Course	39.4	54	2,916
 Diamond Pro®	8"	18"	12"	Rear Lip		✓	✓		✓		✓	✓	✓		7.1°; 1" Per Course	45	45	3,380
 Diamond Pro® Air	8"	18"	12"	Rear Lip		✓	✓		✓		✓	✓			4°	45	45	2,480
 Diamond Pro® PS	8"	18"	12"		Fiberglass Pins		✓		✓		✓	✓		✓	1.7° or 7.1°	45	45	3,380
 Highland Stone® SRW Small & Medum	6"	12", 6"	12"	Rear Lip		✓	✓		✓		✓				10.6°; 1.125" Per Course	33.75	45	3,875
 Highland Stone® SRW Large	6"	18"	12"	Rear Lip		✓	✓		✓		✓				10.6°; 1.125" Per Course	33.75	45	3,875
 Highland Stone® FSW Small & Medium	6"	12", 6"	9"			✓	✓		✓		✓				Vertical	32	40	2,630
 Highland Stone® FSW Large	6"	18"	9"			✓	✓		✓		✓				Vertical	30	40	2,850
 Highland Stone® 2.0 FSW	6"	6", 12", 18"	5"			✓	✓		✓		✓				Vertical	47.04	96	3,255
 Landmark 2.0	24"	48"	27.5"			✓	✓								3°	-	-	-
 Melville Tandem™	7"	13 ³ / ₁₆ ", 15 ¹ / ₁₆ ", 18 ¹ / ₁₆ "	2 ⁵ / ₈ "		Polypropylene Connectors		✓				✓				0 / 4°	70	90	2,032
 Melville™ Wall	4"	20"	10"				✓				✓				Vertical	26.67	48	3,120
 Melville™ Wall Cap	2"	20"	12"				✓				✓				Vertical	120	70	3,100
 Shelton Wall™	6"	6", 12", 16"	10"		Fiberglass Pins		✓			✓	✓				Vertical	26.67	48	3,120
 Weston Universal	4"	12"	8"							✓**	✓				Vertical	33.5	120	3,136

* This height assumes cores are filled with drainage aggregate, level backfill and clean, compacted sand or gravel and no surcharge. Contact a Belgard Representative for more information.

** Available in untumbled



EXPLORE MORE
FREESTANDING &
RETAINING WALLS

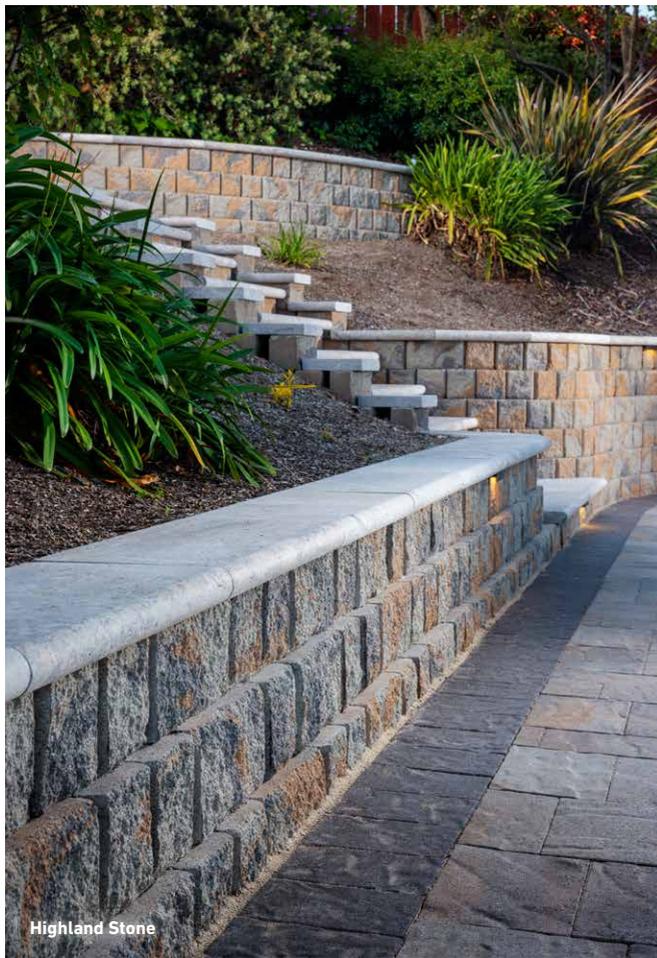


Highland Stone



Melville Tandem




Landmark 2.0

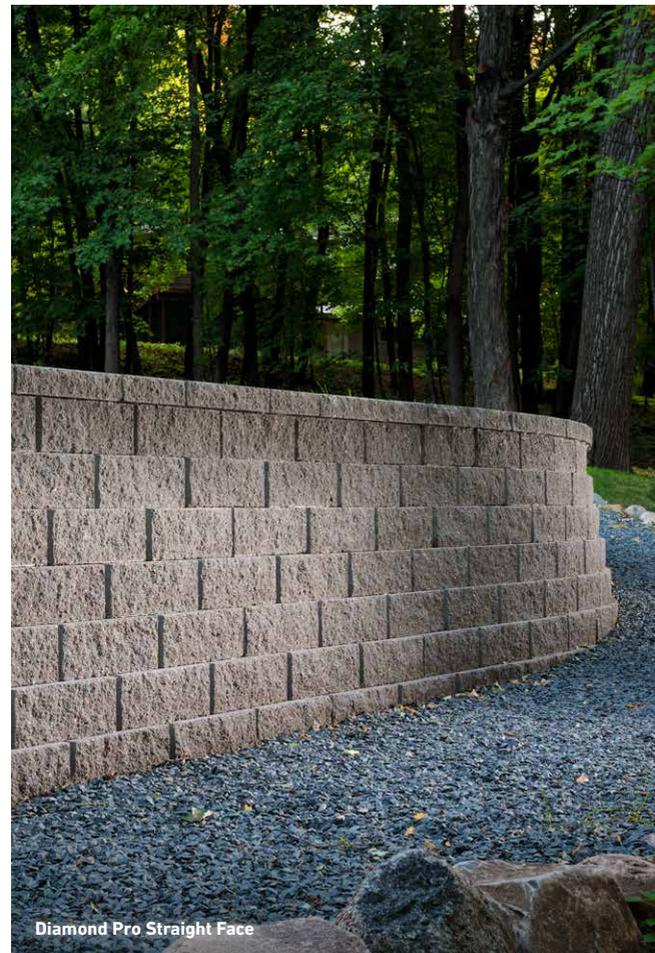

Diamond Pro Straight Face



Diamond Pro Smooth Face

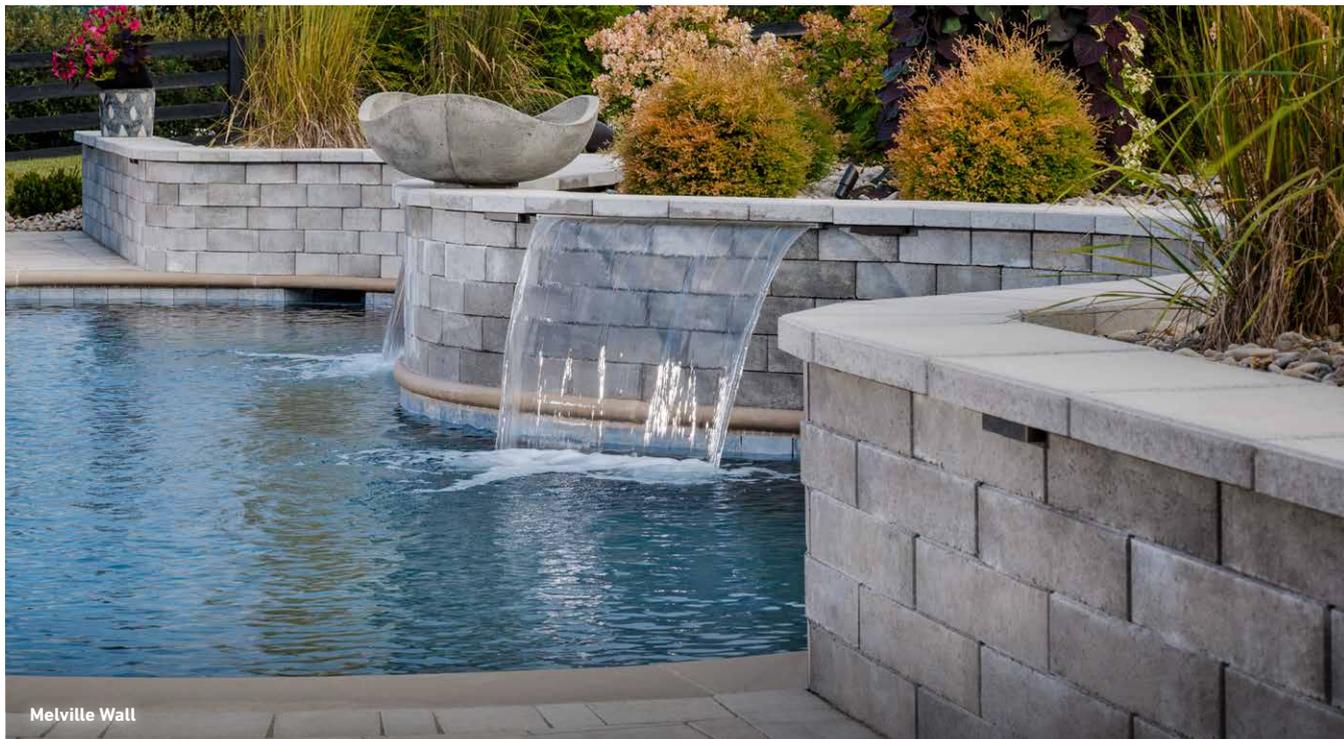

Melville Wall

ROOFTOP PAVERS & PEDESTALS

Possibilities are endless when designing and building pedestal decks using Belgard Commercial Pedestals. The pedestal system's elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building pedestal decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each pedestal paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific pedestal pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you're done – saving time and money.

Specifications

- Supports up to 1000 lbs.
- Maximum elevation up to 36" using couplers and braces
- Impervious to water, mold & freeze-thaw
- Preassembled
- Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

Resources Available

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- Videos: planning, installation & more
- Take-off assistance
- Samples available
- Technical assistance
- Customer service



	MODEL SE SUPPORTS	MODEL NM SUPPORTS	PEDESTAL PRIME SUPPORTS
Self Leveling Head	✓		✓
Fixed Head	✓	✓	✓
Adjustable	✓	✓	✓
Extendable w/ Coupler	✓	✓	✓
Adjustment Key	✓	✓	✓
Locking IPE Pins	✓	✓	✓
Recycleable (LEED)	✓	✓	✓
Loading Capacity	✓	✓	✓
Integrated Extension Coupler			✓

NOTE: Contact your local Belgard Representative for information on additional pedestals and accessories available.

Rooftop HydraPressed Slabs

UNITS	PAVER THICKNESS	PAVER SIZE	APPLICATIONS		ADA	SQ. FT. PER PALLET	PALLET WEIGHT (LBS)
				ROOFTOPS & PLAZAS			
Texada 12 x 24	50 mm	12" x 24"	✓	✓	✓	135	2,900
Texada 24 x 24	50 mm	24" x 24"	✓	✓	✓	96	2,300
Ipe Wood Tile	1.69"	24" x 24"	✓	✓	✓	176	990.88
Ipe Wood Tile	1.69"	24" x 48"	✓	✓	✓	176	990.88
Cumaru Wood Tile	1.69"	24" x 24"	✓	✓	✓	176	990.88
Cumaru Wood Tile	1.69"	24" x 48"	✓	✓	✓	176	990.88
Bamboo Wood Tile	1.69"	24" x 24"	✓	✓	✓	176	990.88
Bamboo Wood Tile	1.69"	24" x 48"	✓	✓	✓	176	990.88
Itauba Wood Tile	1.69"	24" x 24"	✓	✓	✓	176	990.88
Garapa Wood Tile	1.69"	24" x 24"	✓	✓	✓	176	990.88
Tigerwood Wood Tile	1.69"	24" x 24"	✓	✓	✓	176	990.88

Pedestals & Accessories

PRODUCT NAME	PRODUCT DESCRIPTION	PIECES PER CARTON
STAR-T	3/8" - 9/16" (10-15mm)	50
STAR-B	3/16" Extension (5mm)	50
SE0-P	1.125" - 1.5" (28-38mm)	40
SE1-P	1.5" - 2" (37.5-50mm)	30
SE2-P	2" - 3" (50-75mm)	25
SE3-P	3" - 4.75" (75-120mm)	25
SE4-P	4.75" - 6.75" (120-170mm)	25
SE5-P	6.75" - 8.5" (170-215mm)	25
SEP-1	5" Extension (127mm)	30
NM-1	1"-1.57" (25-40mm)	40
NM-2	1.57"-2.75" (40-70mm)	30
NM-3	2.36"-3.93" (60-100mm)	25
NM-4	3.54"-6.30" (90-160mm)	15
NM-5	5.90"-10.63" (150-270mm)	12
NM-EXT	5.7" Extension (145mm)	30
EH-12	1/2" Fixed (12mm)	250
EH-15	5/8" Fixed (16mm)	200
EH-20	3/4" Fixed (20mm)	150
RUB-14	1/4" Fixed RUBBER	150
RUB-38	3/8" Fixed RUBBER	150
RUB-PINS	1/4" Fixed w/ 4 Pins	100
PR1	1.2" - 2.55" Adjustable Pedestal	1 per box
PR2	6.1" Adjustable Pedestal	1 per box
PR3	16" Adjustable Pedestal	1 per box
B1	1.25"-2" (31-50 mm)	-
B2	2"-3" (50-75mm)	-
B3	3" - 4.75" (75-120mm)	-
B4	4.75" - 7.75" (120-196mm)	-
C4	2.5"-4" (63-101mm)	-

Cubes (Planters/Benches) & Cube Tops

PRODUCT NAME	COMMON SIZES (CUSTOM SIZES AVAILABLE)	COLORS (CUSTOM COLORS AVAILABLE)	MINIMUM QTY
Powder Coated Aluminum Cube	24"L x 24"H x 20"H 24"L x 24"H x 36"H 48"L x 24"H x 20"H 48"L x 24"H x 36"H	Red, Black, White, Charcoal, Silver, Bronze, Zinc*	1
Ipe Cube	24"L x 24"H x 16.5"H 48"L x 24"H x 16.5"H	Brown (Natural variations to be expected)	1
Ipe Top	24"L x 24" H 48"L x 24"H	Brown (Natural variations to be expected)	1

*Premium color



EXPLORE MORE
ROOFTOP PAVERS
& SLABS


Cube Top



Aluminum Cube



Ipe Wood Cube

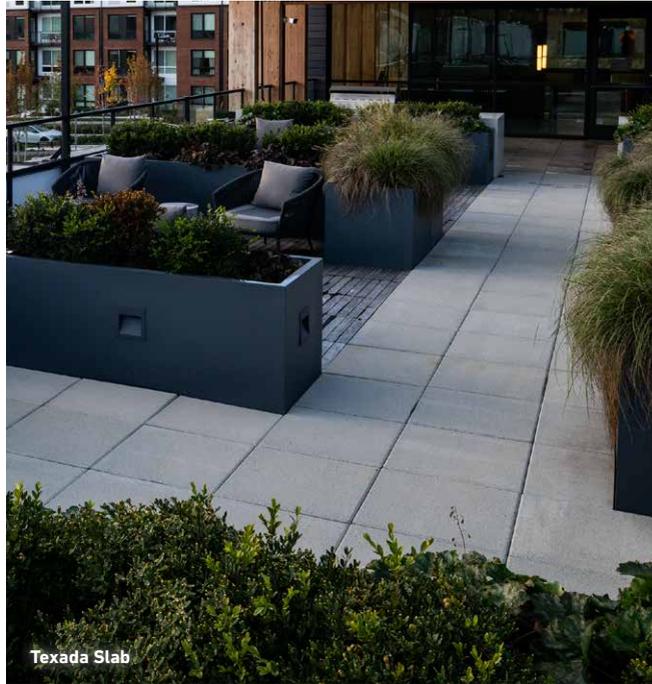

Texada Slab

Texada



CHARCOAL




DESERT SAND




NATURAL

Plaza Slab



SRI WHITE

Wood Pavers




MASSARANDUBA



CUMARU



IPE

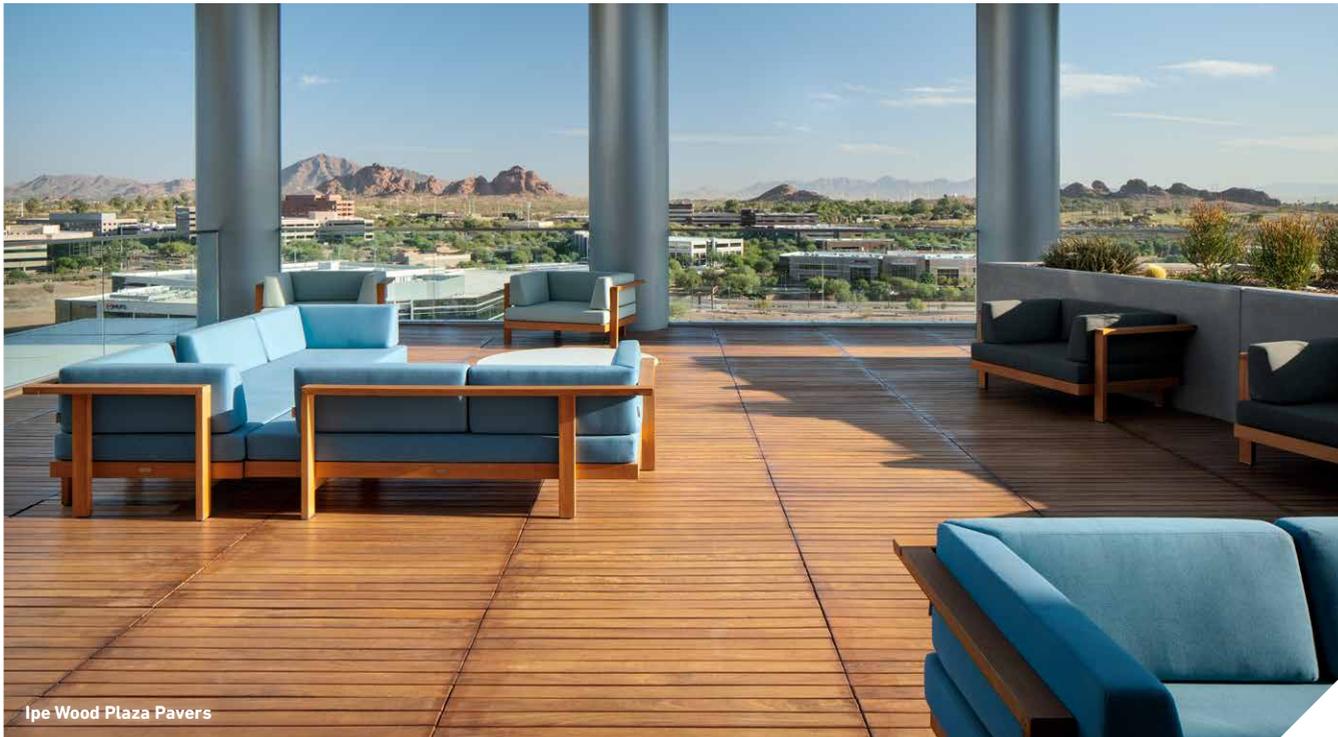


Ipe Wood Plaza Pavers

Notice: Colors subject to change without prior notice. Colors in this brochure may vary from current stock. Actual samples are available from Belgard Commercial. Slight variations in color may occur during manufacturing. Slight scuffing may occur during handling.

Accessories


PRODUCT	SIZE	LN. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
 Anchor® Column Cap	28 x 28 x 4"	-	4	600
 Anglia Edger®	8" x 7 ⁷ / ₈ " x 4 ¹ / ₂ " 8" x 10 ¹ / ₂ " x 4 ¹ / ₂ " 8" x 15 ¹ / ₂ " x 4 ¹ / ₂ " 8" x 17 ⁷ / ₈ " x 4 ¹ / ₂ "	69.75	60	2,556
 Artforms™	3" x 18" x 36"	-	18	2,745
 Artforms™	3" x 6" x 36"	-	21	1,095
 Landings™ Step Unit	6" x 48" x 18"	-	6	2,565
 Marina™ Coping	6 x 12 x 2 ³ / ₈ "	63	126	1,764
 Melville™ Curb	4" x 24" x 6 ¹ / ₂ "	96	48	2,449
 Module Truncated Dome	12" x 12" x 2 ³ / ₈ "	-	120	3,338

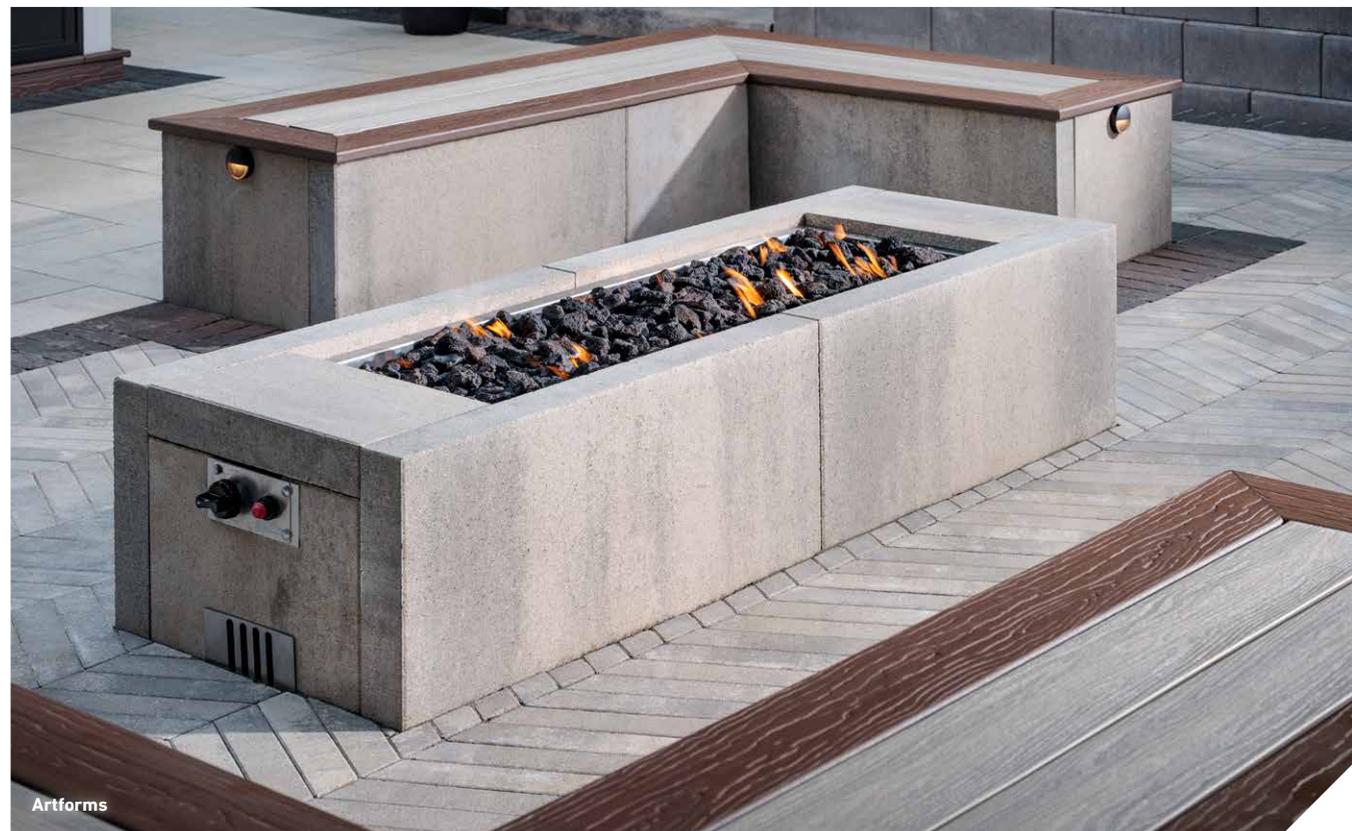

Artforms

BELGARD RESOURCES


DESIGN FILES

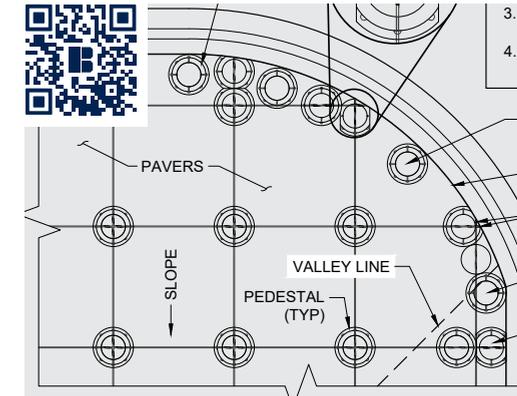

TECHNICAL RESOURCES



CONTINUING EDUCATION

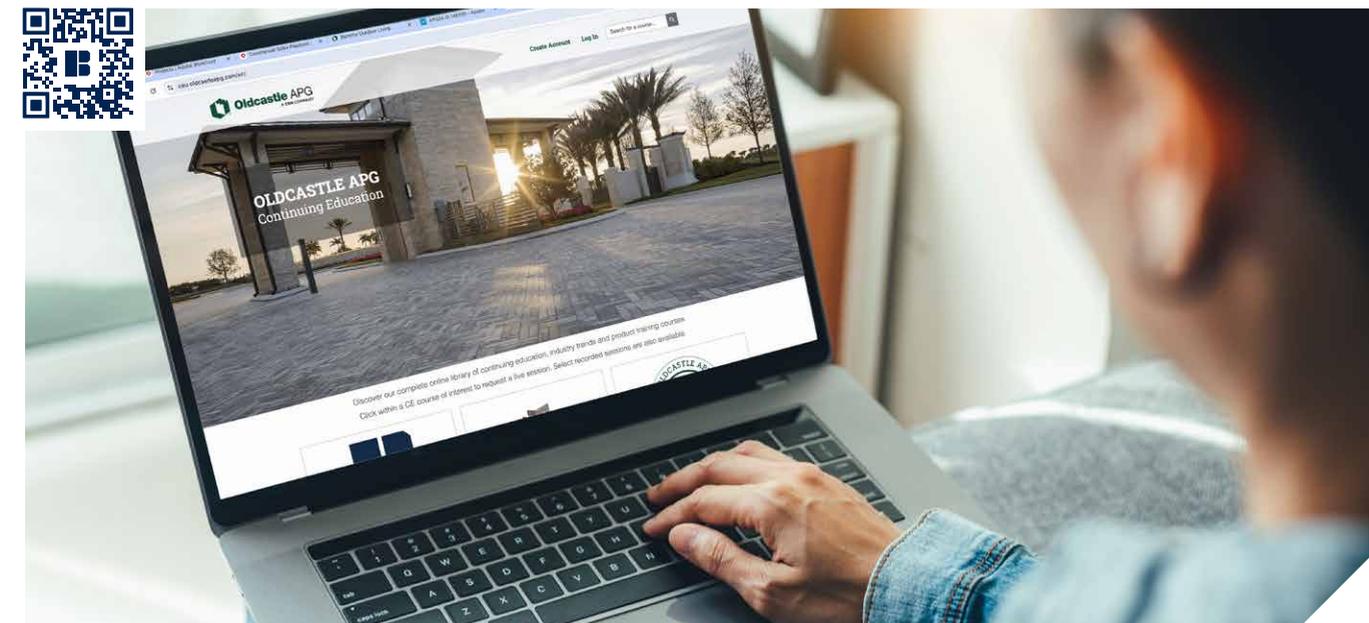

ORDER SAMPLES



FIND YOUR SALES REP

BELGARD®

AN OLDCASTLE® APG OUTDOOR BRAND

BELGARDCOMMERCIAL.COM

© 2026 Oldcastle® APG, Inc. All Rights Reserved. BELCOMM25-D-599100 | CPM | Revised 01/2026

