

Paver Applications



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

Paver Finishes

Finishes



Smooth

Unit surfaces and microchamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



Textured (slate)

Units are molded to form a surface that emulates natural stone with a sculpted, textured finish.



Dime	nsior	ıs™ Series V	<i>l</i> ehicular	& Arch	itectural	l Pavers								
						APPLIC	CATIONS		ADA*		FINISHES			
	UN	ITS	THICKNESS	SIZE	A				F	Smooth	Textured	Antiqued	CHAMFER WIDTH	SQ. FT. PER PALLET
3-PIECE S	YSTEM													
• •	•	Dimensions 6	30 mm 60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm					\checkmark			3 mm	120 105
~ ~	~	Dimensions 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm					✓			3 mm	120
*		Dimensions 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓			3 mm	112.5
SINGLE PI	ECE													
		3" x 9"	60mm 80 mm	3" x 9"	60mm 80 mm	80 mm	80 mm	80 mm	√	\checkmark			3 mm	90
		3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		✓	√		√	3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm)
		3" x 18"	101.6 mm	3" x 18"	101.6 mm				✓	\checkmark			3 mm	49.5
		6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm		✓	✓		✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
		6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	✓	\checkmark		✓	3 mm	112.5 (60 mm) 90 (80 mm)
		6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm	✓	√	√	√	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
		12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm		✓	✓		√	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
		12" x 18"	60 mm	12" x 18"	60 mm				✓	\checkmark			3 mm	120
		12" x 24"	60 mm	12" x 24"	60 mm				✓	\checkmark			3 mm	120
		18" x 18"	60 mm	18" x 18"	60 mm				✓	√			3 mm	90
		18" x 24"	60 mm	18" x 24"	60 mm				✓	√			3 mm	120
		18" x 36"	60 mm	18" x 36"	60 mm				✓	✓			3 mm	90
		24" x 24"	60 mm	24" x 24"	60 mm				✓	✓			3 mm	80
		24" x 36"	60 mm	24" x 36"	60 mm				✓	✓			3 mm	120



PICTURED ON SPREAD: DIMENSIONS SERIES











Modu	line Series® Vel	hicular &	Archite	ctural Pa	avers								
					APPLIC	ATIONS	ADA*	MECHANICAL INSTALL		FINISHES		CHAMFER	SQ. FT. PER
	UNITS	THICKNESS	SIZE	Ŕ		~ 3	Ł.	0-6°	Smooth	Textured	Antiqued	WIDTH	PALLET
	4" x 12"	80 mm	4" x 12"	80 mm	80mm		√		√		✓	3 mm	85
	4" x 18"	80 mm	4" x 18"	80 mm			√		√			3 mm	72
	4" x 24"	80 mm	4" x 24"	80 mm			✓		√			3 mm	96

Geometric Sh	apes												
					APPLIC	ATIONS	ADA*	MECHANICAL INSTALL		FINISHES		CHAMEED	60 57 050
	UNITS	THICKNESS	SIZE	Ä		6-8	Ł.		Smooth	Textured	Antiqued	CHAMFER WIDTH	SQ. FT. PER PALLET
	Diamond	60 mm	12" x 12"	60 mm			√		\checkmark			3 mm	93.53
	12" Parallelogram (60° angle)	60 mm	3" x 12"	60 mm			√		\checkmark			3 mm	85.73
	18" Parallelogram (60° angle)	60 mm	6" x 18"	60 mm			√		√			3 mm	114.31
	Hexagon	60 mm	12" x 12"	60 mm			√		\checkmark			3 mm	100.02

Vehicular & Architectural Paver	S												
				APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINISHES		CHAMEED	CO ET DED
UNITS	THICKNESS	SIZE	Ä				E.	548	Smooth	Textured	Antiqued	CHAMFER WIDTH	SQ. FT. PER PALLET
Cambridge Cobble® (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						\checkmark		√	Round Chamfer	120
Cambridge Cobble® 6 x 6	60 mm 80 mm	6" x 6"	60 mm	80 mm					\checkmark		✓	Round Chamfer	120 (60 mm) 96 (80 mm)
Cambridge Cobble® 6 x 9	60 mm 80 mm	6" x 9"	60 mm	80 mm					\checkmark		✓	Round Chamfer	120 (60 mm) 96 (80 mm)
Empire™	60 mm 80 mm	3" x 12"	60 mm	80 mm						✓		-	120 (60 mm) 96 (80 mm)
Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm					✓				Rolled Edge	103.9
Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	\checkmark	✓	\checkmark		✓	7 mm	120 (60 mm) 96 (80 mm)
Melville™ Plank Small (3 pc)	60 mm	5" x 11¾16" 5" x 15¾" 5" x 191¼16"	60 mm				✓		\checkmark			3 mm	114.53
Melville™ Plank Large (3 pc)	60 mm	7½" x 11¾6" 7½" x 15¾" 7½" x 19½"	60 mm				√		\checkmark			3 mm	122.71
Papyrus™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				√			√		3 mm	112.5
Travertino	30 mm 60 mm	6" x 6" 6" x 12" 12" x 12"	30 mm 60 mm				√			√		N/A	192 120













Permeable Pavers															
				APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINISHES		MANUF.	° CUDEAGE	CHAMEED	60 57 050
UNITS	THICKNESS	SIZE	À		6-8		F		Smooth	Textured	Antiqued	JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
AQUALINE™ SERIES															
3" x 12"	80 mm	3" x 12"	80 mm	80 mm			✓		\checkmark			7 mm	10%	3 mm	88
6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		√		√			7 mm	7%	3 mm	96
6" x 12"	80 mm	6" x 12"	80 mm	80 mm			√		√			7 mm	5%	3 mm	96
Ashlar 3-Piece	80 mm	4½" x 9" 4½" x 4½" 9" x 9"	80 mm	80 mm	80 mm	80 mm	√		√			10 mm	12%	3 mm	96
ADDITIONAL PRODUCT LINES															
Aqua Roc™	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓	✓	\checkmark			8 mm	9%	3 mm	97.4
Eco Dublin°	80 mm	6 ¹⁵ /16" x 3 ⁷ /16" 6 ¹⁵ /16" x 6 ¹⁵ /16" 6 ¹⁵ /16" x 10 ⁵ /16"	80 mm	80 mm			√	√	√		√	12 mm	7%	N/A	91.6


Concrete Grid Pavers												
				APPLIC	ATIONS	ADA*	MECHANICAL INSTALL		FINISHES		% SURFACE	SQ. FT.
UNITS	THICKNESS	SIZE	Ä			Ł	5000	Smooth	Textured	Antiqued	OPENING	PER PALLET
Turfstone™	80 mm	15¾" x 23%"	80 mm					√			40%	101

Paver Available Colors

Solid Colors



Antiqued Paver Colors (Tumbling is available for all solid and blended paver colors)

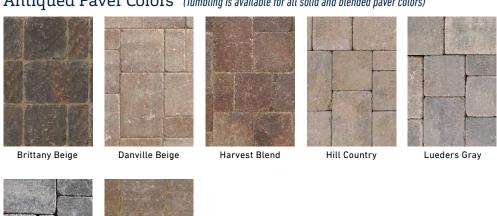




Rustic Beige

Blended Colors




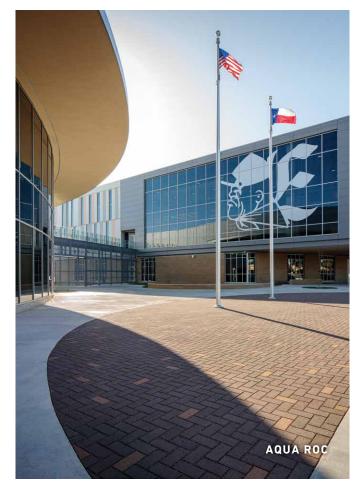







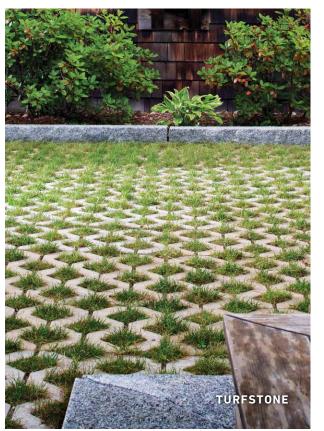



Porcelain Pavers									
					ADA	PEDESTAL	SQ. FT. PER	PCS. PER	PALLET
UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	E	APPLICATION	PALLET	PALLET	WEIGHT (LBS)
Glocal - 24 x 24	Concrete	3/4"	24" x 24"	Clear, Ideal, Type, Classic	✓	✓	232.5	60	2,160
Glocal - 24 x 48	Stone	3/4"	24" x 48"	Clear, Ideal, Type, Classic	√	✓	271.25	35	2,160
Noon - 12 x 48	Wood	3/4"	12" x 48"	Daylight, Ember, Honey	√	✓	279	72	2,664
November	Stone	3/4"	24" x 24"	Rain, Wind, Warm, Land	✓	✓	232.5	60	2,160
Quarziti 2.0	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River	√	✓	232.5	60	2,160
Quarziti 2.0	Stone	3/4"	24" x 48"	Glacier, Mountains, Waterfall, River	√	√	271.25	35	2,160
Travertini Cross Cut	Travertine	3/4"	24" x 24"	Pearly, Light, Misty, Rustic	✓	√	232.5	60	2,160
Travertini Vien Cut	Travertine	3/4"	24" x 48"	Light, Dark, Misty	√	√	271.25	35	2,160
Unico 2.0 Coping	Stone	3/4"	11.62" x 23.54"	Glacier, Mountains, Waterfall, River, Pearly, Light, Misty	✓		205.2	108	1,944



RESISTANT TO FREEZE THAW

Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to +60° C (-60°F to +140°F).



RESISTANT TO Breakage

Because every slab can withstand loads of over 2200 lbs.



RESISTANT TO CHEMICAL AGGRESSION

Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.



RESISTANT TO STAINS

Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.



EASY TO LAY

Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



EASY TO CLEAN

Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.*



EASY TO REMOVE


Because a 24" x 24" slab weighs just 37 lbs., its light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).



EASY FOR YOU


Because the structured top textures formed on the surface of our pavers create slip resistant surfaces.


^{*} It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

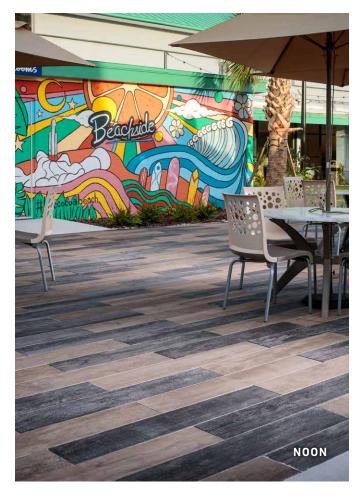





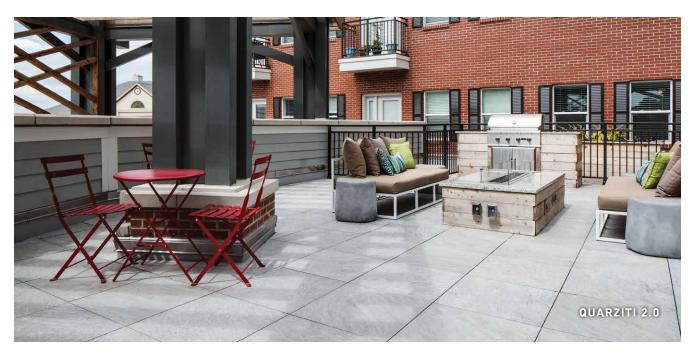

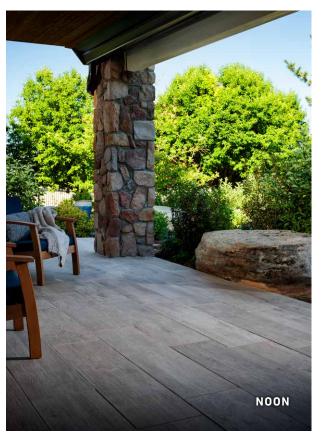



Segmental Retaining Wa	lls (SF	RW)															
		UNIT SIZE	E	CONNECTION TYPE		SORIES* PARATELY)	TEXT	TURE				FACE STYLES	5			BATTER/	SQ. FT.
UNITS	Height	Width	Depth	Block	Column/ Corner Unit	Сар	Sculpted	Split	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut	Smooth	Quarried	SETBACK	PER PALLET
Diamond® 9D	6"	173/4"	9"	Rear Lip	✓	✓		√			√		√			10.6°	35.5
AB® Classic	8"	18"	12"	Front Lip		✓		✓	√							6°	40
Diamond Pro*	8"	18"	12"	Rear Lip	√	✓	√	√	√	√			✓	√	√	7.1°	36
Diamond Pro® PS	8"	18"	12"	Fiberglass Pins	√	√		√	√	√	√	√	✓			Near Vertical, 7.1°	36
Diamond Pro* Air	8"	18"	111½"	Front Lug	√	✓		√	✓							4°	36


Freestanding Walls (FSW))																
		UNIT SIZE		CONNECT	ION TYPE	ACCESS (SOLD SEF			TEXTURE				FACE STYLES	;		BATTER/	SQ. FT.
UNITS	Height	Width	Depth	Block	Other	Column/ Corner Unit	Сар	Sculpted	Split	Antiqued	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut	SETBACK	PER PALLET
Easton™ Wall	4"	8", 12", 16"	8"				√			✓	√					Vertical	42
Easton™ Wall Universal	4"	12"	8"				✓			✓	√					Vertical	112 pieces
Melville™ Wall	4"	20"	10"								✓					Vertical	26.67
Weston Stone™	4"	8", 12", 16"	8"				✓			✓	√					Vertical	42
Weston Stone™ Universal	4"	12"	8"				✓			✓	√					Vertical	112 pieces










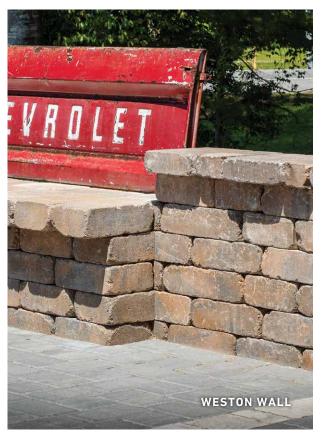



Wall Available Colors

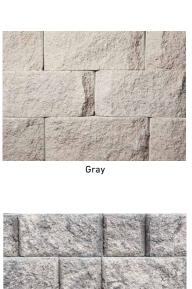























AB® Fencin	g Syster	n					
		UNIT SIZE		TEX	TURE	BATTER/	QTY PER
UNITS	Height	Width	Depth	Striated	Split	SETBACK	PALLET
Half	8"	55/e"	9.188"	✓	✓	Vertical	144
Lite	4 <i>1/</i> 5"	5 ⁵ ⁄8"	175⁄8"	✓	✓	Vertical	96
½ Lite	4 <i>1</i> /5"	5 ⁵ ⁄8"	9.188"	✓	✓	Vertical	192
Post Block	8"	18"	12"	✓	✓	Vertical	48
Panel Block	8"	18"	6"	✓	✓	Vertical	72
Cap Block	4"	18"	12"	✓	✓	N/A	48



Accessorie	es					
UNITS		SIZE	UNITS/ PALLET	LAYER/ PALLET	WEIGHT/ UNIT	WEIGHT/ PALLET (LBS)
A CHEST AND A STATE OF	Landings [™] Step Unit	6" x 48" x 18"	2	-	462	924
	Laguna™ Coping	14¾16" x 235/6" x 2¾8"	40	10	50	2,200
	Marina™ Coping	5 ¹⁵ /16" x 11 ¹³ /16" x 23/6"	105	5	-	2751
	Unico Porcelain Coping	12.99" x 23.54" x ¾"	120	-	-	2080

LANDINGS STEP UNIT



Accessories Available Colors

$Landings^{^{\text{\tiny{TM}}}} Step\ Unit$







Marina[™] Coping









Rooftop Pavers & Pedestals

Possibilities are endless when designing and building plaza decks using Belgard Commercial Pedestals. The pedestal system's elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building plaza decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each plaza paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific plaza pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you're done – saving time and money.

SPECIFICATIONS

- Supports up to 1000 lbs.
- · Maximum elevation up to 36" using couplers and braces
- Impervious to water, mold & freeze-thaw
- Preassembled
- · Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

RESOURCES AVAILABLE

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- Videos: planning, installation & more
- Take-off assistance
- · Samples available
- Technical assistance
- Customer service





Model SE0 Adjusts from 11/4" - 11/2"



Model SE1 Adjusts from 11/2" - 2"



Model SE2 Adjusts from 2"- 3"



Adjusts from 3"- 43/4"



Adjusts from 43/4" - 63/4"



Model NM1 Adjusts from 1"- 11/2"



Adjusts from 11/2" - 23/4"



Adjusts from 21/3" - 4"



Model NM4 Adjusts from 31/2" - 61/3"



Adjusts from 6" - 101/2"



Model B1 Adjusts from 11/4"-2" with 3/16" spacer tab



Model B2 Adjusts from 2"-3" with 3/16" spacer tab



Adjusts from 3"-43/4" with 3/16" spacer tab



Adjusts from 4¾"-7¾" with 3/16" spacer tab



Coupler adds 21/2"-4" in height to B3 & B4



Model PR1 Adjusts from 1.2"- 2.55"

Model PR2 Adjusts to 6.1"

Model PR3 Adjusts to 16"



MODEL SE SUPPORTS MODEL NM SUPPORTS PEDESTAL PRIME SUPPORTS Self Leveling Head Fixed Head Adjustable Extendable w/ Coupler Adjustment Key Locking IPE Pins Recycleable (LEED) Loading Capacity Integrated Extension Coupler

Rooftop Plaza Pavers											
					FINI	SHES		DEDECTAL	CO ET DED	DCC DED	PALLET
UNITS	THICKNESS	SIZE	MATERIAL	Smooth	Matte	Shot Blast	Diamond	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	WEIGHT (LBS)
Jewell Plaza Slabs	2"	24" x 24"	Concrete	✓				√	88	22	1,771
Classic Plaza Slabs	2"	24" x 24"	Concrete	✓	\checkmark	\checkmark	√	✓	Vari Belgard	es per selection. Contact your I Representative for more info	local rmation.
Glocal	3/4"	24" x 24"	Porcelain	✓				✓	232.5	60	2,160
Wood Plaza Slab (IPE, Cumaru, or Grappa)	3/4"	23%" x 23%"	lpe	√				√	600	150	3,375
Quarziti 2.0	3/4"	24" x 24"	Porcelain	√				√	232.5	60	2,160

Rooftop Pavers											
UNITS	THICKNESS	SIZE	MATERIAL	FINISHES				DEDECTAL	CO ET DED	DCC DED	PALLET
				Smooth	Matte	Shot Blast		PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	WEIGHT (LBS)
Ballast Pavers	15/8"	8½" x 16"	Concrete	/					190	200	2,599
Dattast Favers	1 /6	072 X 10	Concrete	V					170	200	2,377







Jewell Plaza Slabs




Foundry



Belgard has solutions for high wind applications and paver layout services. Please contact your local representative for more information.

Pedestals & Accessories **PRODUCT NAME PRODUCT DESCRIPTION** PIECES PER CARTON STAR-T 3/8" - 9/16" (10-15mm) 50 STAR-B 3/16" Extension (5mm) 50 SE0-P 40 1.125" - 1.5" (28-38mm) SE1-P 1.5" - 2" (37.5-50mm) 30 25 SE2-P 2" - 3" (50-75mm) SE3-P 3" - 4.75" (75-120mm) 25 SE4-P 4.75" - 6.75" (120-170mm) 25 SE5-P 6.75" - 8.75" (170-215mm) 25 NM-1 1"-1.57" (25-40mm) NM-2 1.57"-2.75" (40-70mm) 30 NM-3 2.36"-3.93" (60-100mm) 25 15 NM-4 3.54"-6.30" (90-160mm) 12 NM-5 5.90"-10.63" (150-270mm) NM-EXT 5.7" Extension (145mm) 30 1/2" Fixed (12mm) EH-12 250 5/8" Fixed (16mm) EH-15 150 EH-20 3/4" Fixed (20mm) RUB-14 1/4" Fixed RUBBER 150 RUB-38 3/8" Fixed RUBBER 150 **RUB-PINS** 1/4" Fixed w/ 4 Pins 100 1.2" - 2.55" Adjustable Pedestal 1 per box 6.1" Adjustable Pedestal 1 per box PR3 16" Adjustable Pedestal 1 per box

34 COMMERCIAL PRODUCT OFFERING TEXAS 35

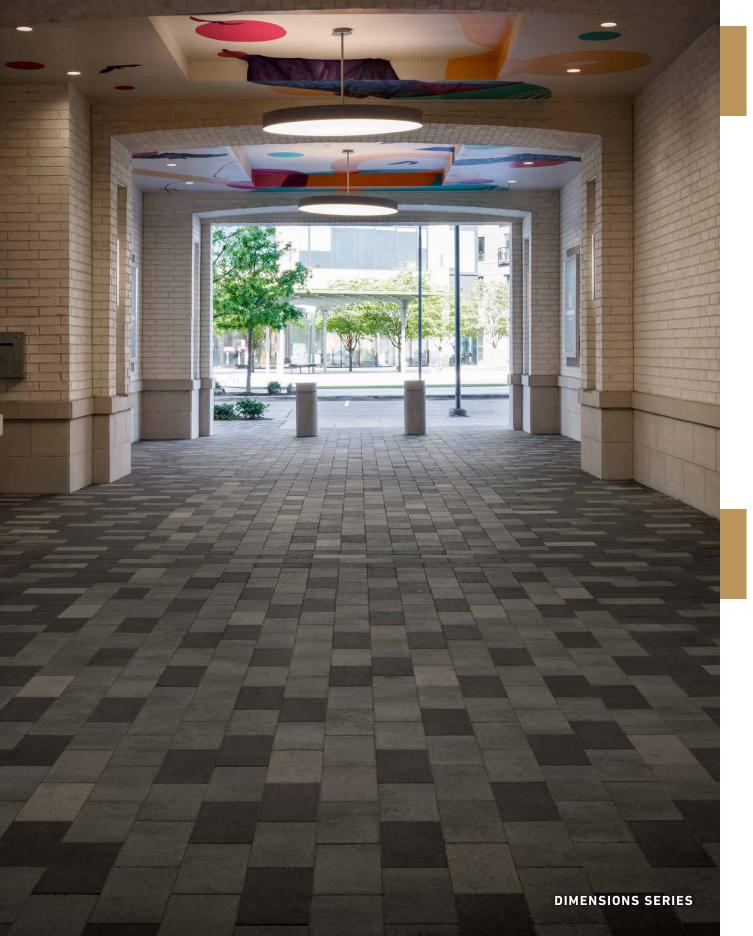

Professional Support



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



ROOFTOP PLAZA LAYOUT SERVICES

Belgard can provide a rough component count based on square footage. This will include paver counts and pedestal counts. Once the project is awarded, a detailed layout can be created showing more precise pedestal counts, heights and locations.



400 Jewell Drive Waco, TX 76712 Ph: 800-792-3216 1607 Spur 529 Rosenberg, TX 77471 **Ph: 800-792-3216** Denton, TX Coming Soon



BELGARDCOMMERCIAL.COM

©2025 Oldcastle APG, Inc. All Rights Reserved. BELCOMM25-D-405550