

BELGARD®


Commercial Product Offering

North Central

Michigan, Minnesota, Nebraska, North Dakota,
Iowa, Illinois, Indiana, Kentucky, Ohio, South Dakota,
Wisconsin, Western Pennsylvania, Kansas, Missouri,
Northeast Oklahoma & Arkansas


HOW TO SELECT THE RIGHT PAVER FOR YOUR APPLICATION

The following icons provide general recommendations for both standard and permeable paving products. A pavement design professional should confirm that the product selected is suitable for the site-specific conditions such as subgrade soil properties, slope, drainage conditions, and traffic loading.

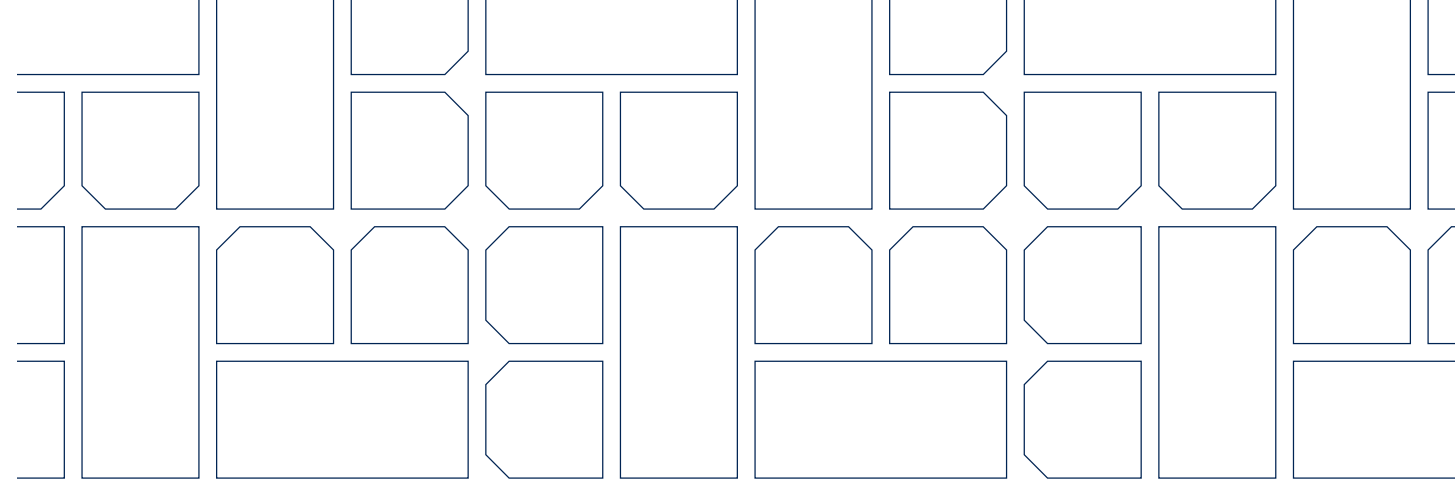

PEDESTRIAN

Designated for areas that are pedestrian only – walkways, patios and other pavement areas not subjected to any vehicular traffic. **All** Belgard paver and slab products are suitable for this application.

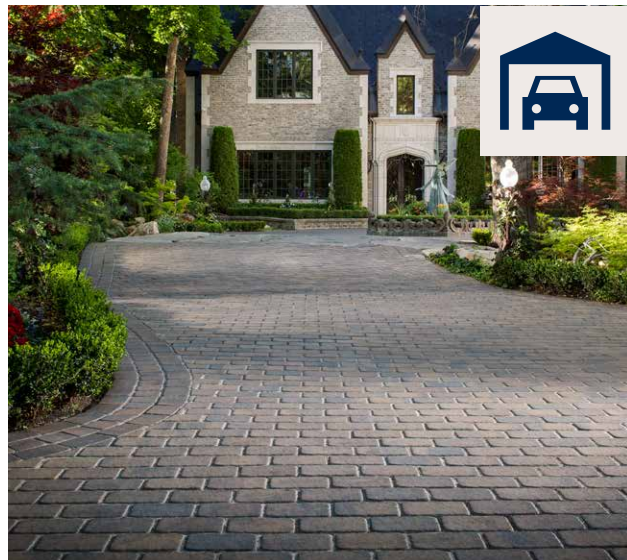

RESIDENTIAL DRIVEWAYS

Pavements used primarily for residential driveways, but also includes golf cart paths, commercial plazas, courtyards and pathways exposed to only light maintenance equipment, including infrequent heavy fire truck or maintenance equipment. Belgard pavers with a **minimum thickness of 60mm and a maximum aspect ratio of 4:1** are suitable for this application. 60mm multi-piece paver systems up to 12" in length are also acceptable for residential driveways with an appropriate base dependent on site conditions. 80mm thick slabs up to a length of 18 inches can be used in residential driveways subjected to only cars with adequate base thickness and subgrade soil strength. Typical lifetime ESALs should be < 7,500 maximum and heavy vehicles must be < 1 per day on average.



LIGHT VEHICULAR

Pavements used for low-traffic municipal or commercial parking lots, including access ways where only cars and light trucks are anticipated. Belgard pavers with a **minimum thickness of 80mm and a maximum aspect ratio of 4:1** are suitable for this application. Typical lifetime ESALs must be < 30,000 ESALs and maximum heavy vehicles should be < 5 per day on average.



HEAVY VEHICULAR

Pavements designated for regular vehicular traffic, including commercial parking lots, access roads where heavy vehicles are a regular component of the daily traffic volume. Belgard pavers with a **minimum thickness of 80mm and a maximum ratio of 3:1** are suitable for this application. Herringbone laying pattern is recommended on all roadways. Typical lifetime ESALs typically are > 30,000 ESALs and > 5 heavy vehicles per day.

The information set forth herein is for general informational purposes only. All such information is provided in good faith, however Oldcastle APG, Inc. and its affiliates make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability or completeness of any of the information and shall have no liability to any party for loss or damage incurred as a result of the use or reliance on any information provided herein. Any use of the information is at the user's sole risk.

COLORS & FINISHES OFFERING

Solid Colors



Tone-on-Tone Colors



Blended Colors



Local Colors



Finishes



Technologies



Dimensions™ Series Vehicular & Architectural Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES		TECHNOLOGIES		CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)		
								Standard	Textured	DuraFusion	ColorTech						
	3" x 12"	60 mm 80 mm	3" x 12"	60 mm	80 mm					✓	✓	✓	✓	3 mm	110 (60 mm) 88 (80 mm)	440 (60 mm) 352 (80 mm)	3,102 (60 mm) 3,300 (80 mm)
	6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm 80 mm 101.6 mm	80 mm 101.6 mm	101.6 mm				✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101 mm)	480 (60 mm) 384 (80 mm) 288 (101 mm)	3,173 (60 mm) 3,590 (80 mm) 3,370 (101 mm)
	6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm			✓	✓	✓	✓	3 mm	112.5 (60 mm) 90 (80 mm)	300 (60 mm) 240 (80 mm)	3,173 (60 mm) 3,366 (80 mm)
	6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm 80 mm 101.6 mm	80 mm 101.6 mm	101.6 mm	101.6 mm			✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101 mm)	240 (60 mm) 192 (80 mm) 144 (101 mm)	3,384 (60 mm) 3,717 (80 mm) 3,370 (101 mm)
	12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm 80 mm 101.6 mm	80 mm 101.6 mm	101.6 mm				✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101 mm)	120 (60 mm) 96 (80 mm) 72 (101 mm)	3,384 (60 mm) 3,590 (80 mm) 3,370 (101 mm)
	12" x 18"	60 mm	12" x 18"	60 mm						✓	✓	✓	✓	3 mm	120	80	3,384
	12" x 24"	60 mm	12" x 24"	60 mm						✓	✓	✓	✓	3 mm	120	60	3,384
	18" x 18"	60 mm	18" x 18"	60 mm						✓	✓	✓	✓	3 mm	90	40	2,511
	18" x 24"	60 mm	18" x 24"	60 mm						✓	✓	✓	✓	3 mm	120	40	3,348
	24" x 24"	60 mm	24" x 24"	60 mm						✓	✓	✓	✓	3 mm	80	20	2,256
	24" x 30"	60 mm	24" x 30"	60 mm						✓	✓	✓	✓	3 mm	100	20	2,820
	24" x 36"	60 mm	24" x 36"	60 mm						✓	✓	✓	✓	3 mm	120	20	3,300
DIMENSIONS™ 3-PIECE SYSTEM																	
	Dimensions™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						✓	✓	✓	✓	3 mm	120	480	3,516
	Dimensions™ 12	60 mm 80 mm	6" x 12" 12" x 12" 12" x 18"	60 mm	80 mm					✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm)	400	3,516 (60 mm) 3,600 (80 mm)
	Dimensions™ 18	60 mm	9" x 18" 18" x 18" 18" x 27"	60 mm						✓	✓	✓	✓	3 mm	112.5	-	3,182










Note: The Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Vehicular & Architectural Pavers


UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		TECHNOLOGIES			CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Textured	DuraFusion	ColorTech	DuraFusion + ColorTech				
 Brooklyn™	60 mm	3" x 9"	60mm							✓		✓	N/A	103.13	550	2,805	
 Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm							✓		✓	Rolled Edge	103.88	270	2,997	
 Cambridge Cobble®	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						✓				Rounded Chamfer	20 40 60	-	3,120	
 Dimensions™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓		✓		3 mm	120	480	3,516	
 Empire™	60 mm	3" x 12"	60 mm				✓			✓	✓		-	110	440	3,100	
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	✓	80 mm (Herringbone pattern)	✓		✓	✓	7 mm	105 82	486 378	3,112 3,348	
 Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓			✓	✓		3 mm	120	480	3,516	
 Origins™ 12	60 mm 80 mm	6" x 12" 12" x 12" 12" x 18"	60 mm	80 mm			✓			✓	✓		3 mm	120 (60 mm) 96 (80 mm)	400	3,516 (60 mm) 3,600 (80 mm)	
 Origins™ 18	60 mm	9" x 18" 18" x 18" 18" x 27"	60 mm				✓			✓	✓		3 mm	112.5	-	3,182	
 Papyrus™ 18	60 mm	9" x 18" 18" x 18" 18" x 27"	60 mm				✓			✓	✓		3 mm	112.5	-	3,258	
 6" Bishop Hat	60 mm 80 mm 101.6 mm	6" Bishop Hat	60 mm 80 mm 101.6 mm	80 mm 101.6 mm	80 mm 101.6 mm	80 mm 101.6 mm	✓		✓		✓	✓	3 mm	84.5 (60 mm) 67.6 (80 mm) 50.7 (101 mm)	280 (60 mm) 224 (80 mm) 168 (101 mm)	2,383 (60 mm) 2,528 (80 mm) 2,373 (101 mm)	
GEOMETRIC SHAPES																	
 Diamond	60 mm	12" Side	60 mm				✓		✓			✓	3 mm	93.53	108	2,664	
 Hexagon 6"	60 mm	6" Sides	60 mm	60 mm			✓		✓			✓	3 mm	100.02	154	2,845	
 Small Parallelogram	60 mm	3", 12" Sides	60 mm				✓		✓			✓	3 mm	85.73	396	2,390	
 Large Parallelogram	60 mm	6", 18" Sides	60 mm				✓		✓			✓	3 mm	114.31	176	3,165	
TRUNCATED DOME PAVERS																	
 4" x 8" ADA Truncated Dome	60 mm	4" x 8"	60 mm				✓						7 mm	120	-	-	
 12" x 12" ADA Truncated Dome	60 mm	12" x 12"	60 mm				✓						3 mm	120	-	-	

Note: The Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

* May be suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

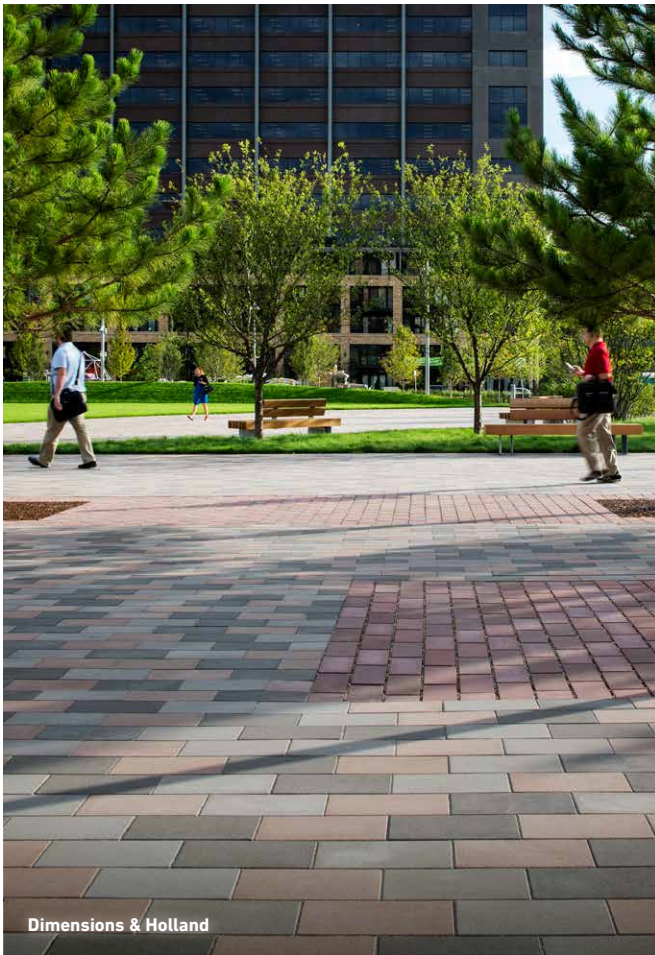

Dimensions & Holland



**EXPLORE
MORE
PAVERS**



Dimensions




Hexagon



Dimensions



Dimensions

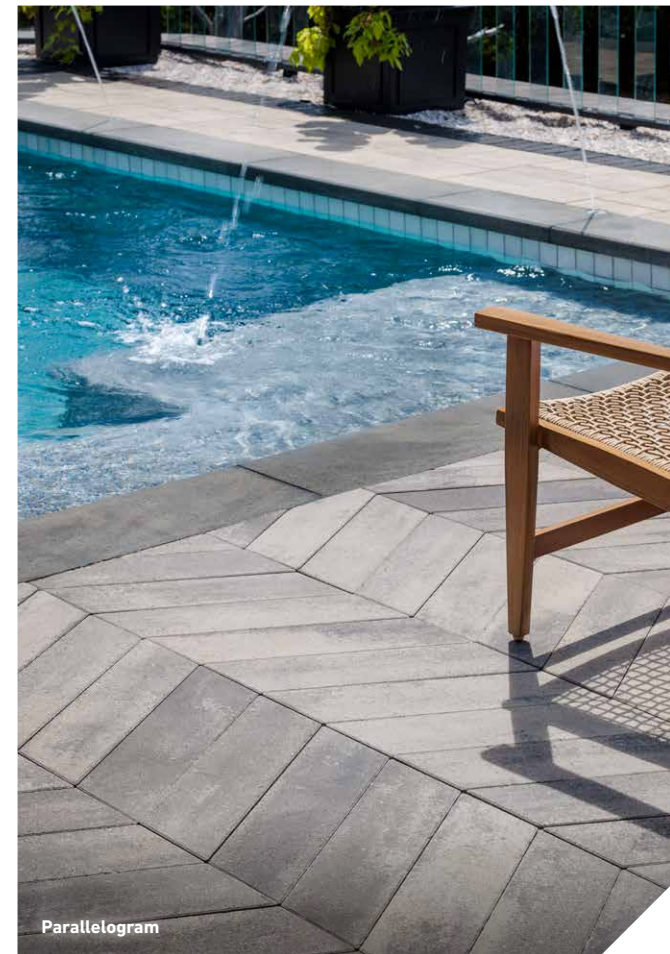



Parallelogram

Permeable Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		TECHNOLOGIES		MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET	PALLET WEIGHT
									Standard	Textured	DuraFusion	ColorTech					
AQUALINE™ SERIES (ALL SIZES MADE TO ORDER)																	
3" x 12"	80 mm	3" x 12"	✓	✓			✓		✓		✓	✓	7 mm	10%	3 mm	88	3,291
4½" x 9"	80 mm	4½" x 9"	✓	✓	✓	✓	✓		✓		✓	✓	10 mm	10%	3 mm	90	3,423
4½" x 9" Herringbone	80 mm	4½" x 9"	✓	✓	✓	✓	✓	✓	✓		✓	✓	10 mm	10%	3 mm	90 (36 full units/layer; 8 half units/layer)	3,423
6" x 6"	80 mm	6" x 6"	✓	✓	✓		✓		✓		✓	✓	7 mm	7%	3 mm	96	3,590
6" x 12"	80 mm	6" x 12"	✓	✓			✓		✓		✓	✓	7 mm	5%	3 mm	96	3,590
12" x 12"	80 mm	12" x 12"	✓	✓			✓		✓		✓	✓	7 mm	3%	3 mm	96	3,590
9" x 9" L-Stone	80 mm	9" x 9"	✓	✓	✓	✓	✓	✓	✓		✓	✓	10 mm	10%	3 mm	90	3,375
Aqualine™ 3-Piece Ashlar	80 mm	4½" x 9" 4½" x 4½" 9" x 9"	✓	✓	✓	✓	✓	✓	✓				10 mm	12%	3 mm	96	-

Concrete Grid Pavements



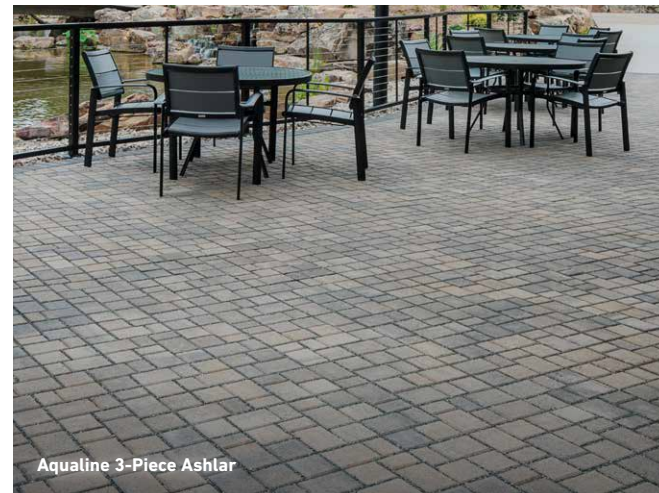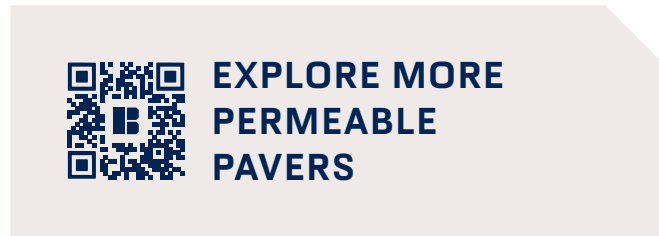














UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		% SURFACE OPENING	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Textured				
Turfstone™	80 mm	15¾" x 23¾"						✓	✓		40%	103.2	40	2,377



* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

Porcelain Pavers

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
										
STONE FINISH										
	Baltica	Stone	3/4"	24" x 24"	Blanc, Crème, Lune, Nuit	✓	✓	232.5	60	2,160
	Na.Me	Stone	3/4"	24" x 24"	Bourgogne, Jura Beige	✓	✓	232.5	60	2,160
	Norr	Stone	3/4"	24" x 24"	Vit, Gra, Svart, Farge, Hav, Oken, Grus	✓	✓	232.5	60	2,160
	November	Stone	3/4"	24" x 24"	Rain, Wind, Warm, Land	✓	✓	232.5	60	2,162.25
	Quarziti 2.0	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River	✓	✓	232.5	60	2,160
	Quarziti 2.0	Stone	3/4"	24" x 48"	Glacier, Mountains, Waterfall, River	✓	✓	271.25	35	2,582
	Travertini Cross Cut	Travertine	3/4"	24" x 24"	Pearly, Light, Misty, Rustic	✓	✓	232.5	60	2,160
	Travertini Cross Cut	Travertine	3/4"	24" x 48"	Pearly, Light, Misty, Rustic	✓	✓	271.25	35	2,582
	Travertini Vein Cut	Travertine	3/4"	24" x 48"	Light, Dark, Misty	✓	✓	271.25	35	2,582
WOOD FINISH										
	Jurupa	Wood	3/4"	24" x 24"	Cool, Master, Camp	✓	✓	232.5	60	2,160
	Kao	Wood	3/4"	12" x 48"	Hazelnut, Hazelnut Raw, Caramel, Caramel Raw, Spice, Spice Raw	✓	✓	279	72	2,664
	Noon	Wood	3/4"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,628
	Oudh <small>(special order - allow 12-14 weeks lead time)</small>	Wood	3/4"	12" x 48"	Cedro, Copahu, Elem, Jinkoh, Pino, Laos, Laodano	✓	✓	279	72	2,628
CONCRETE FINISH										
	Glocal	Concrete	3/4"	24" x 24"	Clear, Ideal, Type, Classic	✓	✓	232.5	60	2,160
	Glocal	Concrete	3/4"	24" x 48"	Clear, Ideal, Type, Classic	✓	✓	271.25	35	2,582
VARIOUS										
	Unico 2.0	Various	3/4"	12" x 24"	Glacier, Mountains, Waterfall, River, Mantle, Daylight, Ember, Honey	✓		254.82	108	2,080



**EXPLORE MORE
PORCELAIN
PAVERS**


Rooftop Pavers & Accessories

UNITS	THICKNESS	SIZE	MATERIAL	FINISHES			PEDESTAL APPLICATION	WEIGHT PER SQ. FT. (LBS)
				Diamond	Smooth	Shot Blast		
ROOFTOP PAVERS								
Ballast Pavers	1½"	16" x 8½"	Concrete				✓	13.75
ROOFTOP PLAZA PAVERS								
Classic Plaza Slab	1⅞"	24" x 24"	Concrete	✓	✓	✓	✓	23
Delta Texada Plaza Slab	1⅓⅙"	24" x 24"	Concrete		✓	✓	✓	-
Porcelain Plaza Pavers	¾"	See page 14	Porcelain		✓		✓	-
Wood Plaza Paver	1½"	24" x 24" 24" x 48"	Ipe Wood		✓		✓	5.56
ACCESSORIES								
Cubes & Cube Tops <small>(Made to order, custom sizes available)</small>	-	24" x 24" x 16½" 48" x 24" x 16½"	Ipe Wood or Powder Coated Aluminum		✓		✓	-
Pedestals - Fixed Height	-	¼", ½", ¾" height	-				✓	-
Pedestals - Adjustable	-	1¼" - 36" height*	-				✓	-

Classic Plaza Slab Colors



Delta Texada Plaza Slab Colors

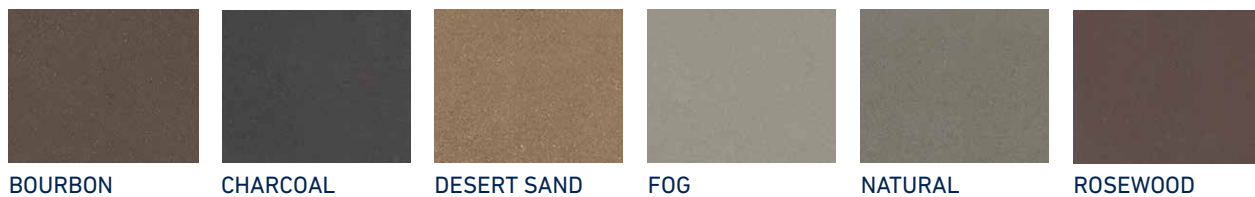

* Higher heights require extension couplers. Additionally, heights over 24" require bracing.

**SRI Color - Solar Reflective Index in excess of 80



SCAN HERE FOR
ROOFTOP PRODUCT
OFFERING GUIDE



EXPLORE MORE
ROOFTOP PAVERS
& SLABS



Segmental Retaining and Freestanding Walls (SRW & FSW)

UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES (SOLD SEPARATELY)		TEXTURE		AVAILABLE FACE STYLES					BATTER/ SETBACK	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Straight	Virtual Joint	Stone Cut	Smooth	Quarried				
 Diamond Pro®	8"	18"	12"	Rear Lip		✓	✓	✓	✓	✓	✓	✓	✓	✓	7.1°; 1" Per Course	Check with your local Belgard Sales Rep.		
 Diamond Pro® Air	8"	18"	11 1/2"	Front Lug		✓	✓			✓			✓	✓	4°	Check with your local Belgard Sales Rep.		
 Diamond Pro® PS	8"	18"	12"		Fiberglass Pin	✓	✓		✓	✓	✓	✓			Front Pinholes: 1.7°; .23" Per Course Back Pinholes: 7.1°; 1" Per Course	Check with your local Belgard Sales Rep.		
 Highland Stone® SRW Small & Medum	6"	12", 6"	12"	Rear Lip		✓	✓		✓	✓					10.6°; 1.125" Per Course	24	64	2912
 Highland Stone® SRW Large	6"	18"	12"	Rear Lip		✓	✓		✓	✓					10.6°; 1.125" Per Course	24	32	2592
 Highland Stone® FSW Small & Medum	6"	12", 6"	9"			✓	✓		✓	✓					Vertical	26.8	80	3280
 Highland Stone® FSW Large	6"	18"	9"			✓	✓		✓	✓					Vertical	28.4	40	3480
 Sterling®	6"	17 1/4"	12"		Fiberglass Pins		✓		✓	✓					10.6°	33.3	45	3983
 Vanguard	6"	6" / 4", 12" / 10", 16" / 14"	10"		Fiberglass Pins		✓						✓		9.5° / 1" (Retaining) 0° / Vertical (Freestanding)	28.4	60	1,921
 Ashlar Tandem™	7"	13 1/4", 15 1/4", 18 1/4"	2 5/8"		Polypropylene Connectors or Modular Block			✓			✓				0 / 4°	70.1	90	2082
 Brisa® FSW	6"	6", 10", 16"	5"			✓	✓	✓							1" / 9.5°	30	30, 30, 60	2,904
 Brisa® SRW	6"	6", 10", 16"	8"	Rear Lip		✓	✓	✓							1" / 9.5°	30	15, 15, 30	2,377
 Lamina Tandem™	7"	15 1/4", 18 1/4", 21 1/4"	2 5/8"		Polypropylene Connectors or Modular Block			✓			✓				0 / 4°	56.08	72	1666
 Melville Tandem™	7"	13 1/4", 15 1/4", 18 1/4"	2 5/8"		Polypropylene Connectors or Modular Block								✓		0 / 4°	70.1	90	2082
 Tandem Modular Block	7 1/4"	7 7/8"	7 7/8"												N/A	49.29	128	2816



Diamond Pro Air Straight



Diamond Pro Virtual Joint








Vanguard



**EXPLORE MORE
FREESTANDING &
RETAINING WALLS**

Accessories

PRODUCT	SIZE	LN. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
ARTFORMS™				
 Artforms™	3" x 18" x 36"	-	18	2,745
 Artforms™	3" x 6" x 36"	-	21	1,095
EDGERS & CURBS				
 Anglia Edger®	8" x 7 ⁷ / ₈ " x 4 ¹ / ₂ " 8" x 10 ¹ / ₂ " x 4 ¹ / ₂ " 8" x 15 ¹ / ₂ " x 4 ¹ / ₂ " 8" x 17 ⁷ / ₈ " x 4 ¹ / ₂ "	69.75	60	2,556
 Melville™ Curb	4" x 24" x 6 ¹ / ₂ "	96	48	2,449
STEP UNIT				
 Landings™ Step Unit	6" x 48" x 18"	-	6	2,565
COLUMN CAP				
 Anchor® Column Cap	28 x 28 x 4"	-	4	600
COPING				
 Delmaro Coping	6" x 12" x 2 ³ / ₈ "	58.5	117	1580
 Grava Coping	36" x 15" x 2 ³ / ₈ "	54	18	3,222
 Marina™ Coping	6 x 12 x 2 ³ / ₈ "	63	126	1,764
 Modena Coping	36" x 15" x 2 ³ / ₈ "	54	18	857 kg 1890 lbs



Marina Coping






Aqualine 9" L-Stone

BELGARD RESOURCES


DESIGN FILES

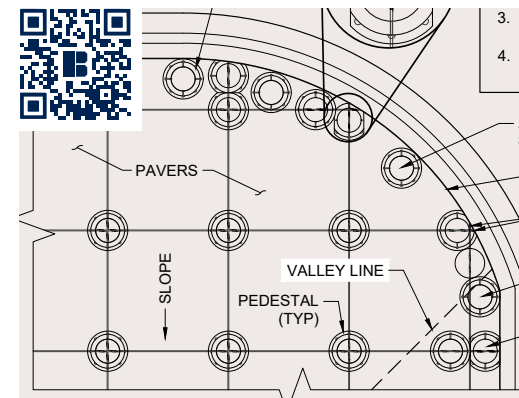

TECHNICAL RESOURCES



CONTINUING EDUCATION

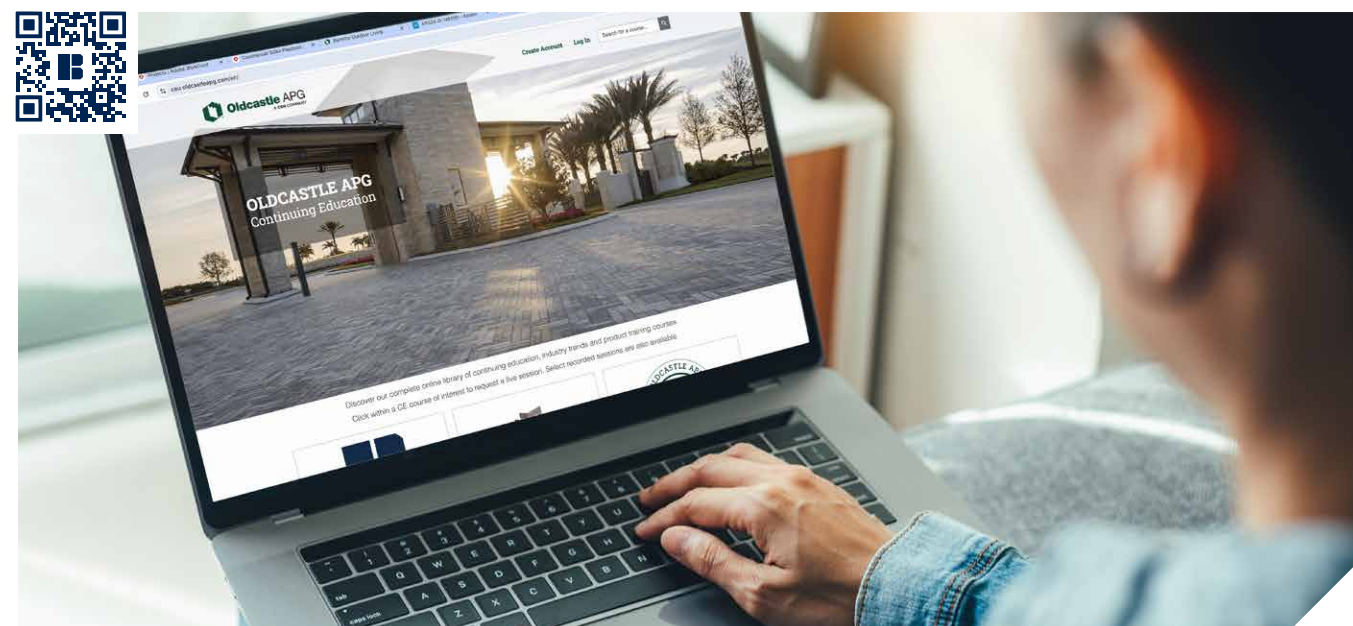

MANUFACTURING LOCATIONS

MORRIS
3400 Bungalow Road
Morris, IL 60450
Ph: 800-358-3003

SHAKOPEE
3450 Johnson Memorial Drive, Shakopee, MN 55379
Ph: 952-351-9600

MUNDELEIN
One Hunt Court
Mundelein, IL 60060
Ph: 877-222-1557

SHAWNEE
4201 Powell Dr.
Shawnee, KS 66226
Ph: 913-667-1792

INDIANAPOLIS
901 East Troy Avenue
Indianapolis, IN 46203
Ph: 800-424-0190

SHEFFIELD
5190 Oster Road
Sheffield, OH 44054
Ph: 440-949-1167

WEST DES MOINES
480 S 16th St.
West Des Moines, IA 50265
Ph: 515-224-0200



ORDER SAMPLES



FIND YOUR SALES REP

BELGARD®

AN OLDCASTLE® APG OUTDOOR BRAND

BELGARDCOMMERCIAL.COM

© 2026 Oldcastle® APG, Inc. All Rights Reserved. BELCOMM26-D-676650 | North Central | Revised 04/2026

