

BELGARD®

Commercial Product Offering

South Central

Texas, Louisiana
& Oklahoma

HOW TO SELECT THE RIGHT PAVER FOR YOUR APPLICATION

The following icons provide general recommendations for both standard and permeable paving products. A pavement design professional should confirm that the product selected is suitable for the site-specific conditions such as subgrade soil properties, slope, drainage conditions, and traffic loading.




PEDESTRIAN

Designated for areas that are pedestrian only – walkways, patios and other pavement areas not subjected to any vehicular traffic. **All** Belgard paver and slab products are suitable for this application.



RESIDENTIAL DRIVEWAYS

Pavements used primarily for residential driveways, but also includes golf cart paths, commercial plazas, courtyards and pathways exposed to only light maintenance equipment, including infrequent heavy fire truck or maintenance equipment. Belgard pavers with a **minimum thickness of 60mm and a maximum aspect ratio of 4:1** are suitable for this application. 60mm multi-piece paver systems up to 12” in length are also acceptable for residential driveways with an appropriate base dependent on site conditions. 80mm thick slabs up to a length of 18 inches can be used in residential driveways subjected to only cars with adequate base thickness and subgrade soil strength. Typical lifetime ESALs should be < 7,500 maximum and heavy vehicles must be < 1 per day on average.

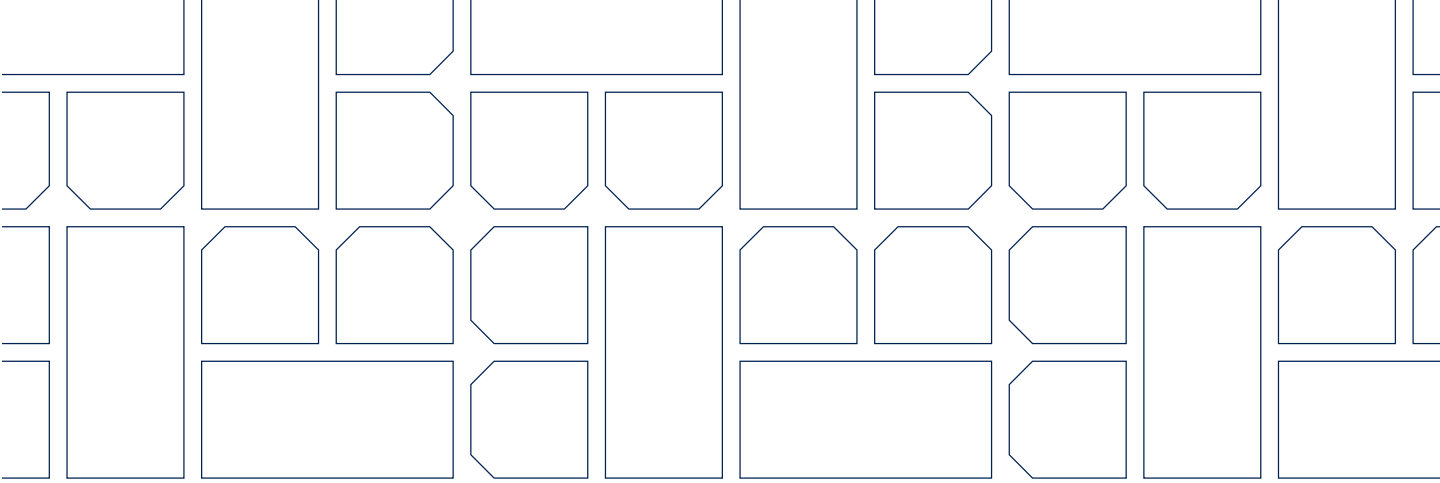

LIGHT VEHICULAR

Pavements used for low-traffic municipal or commercial parking lots, including access ways where only cars and light trucks are anticipated. Belgard pavers with a **minimum thickness of 80mm and a maximum aspect ratio of 4:1** are suitable for this application. Typical lifetime ESALs must be < 30,000 ESALs and maximum heavy vehicles should be < 5 per day on average.



HEAVY VEHICULAR

Pavements designated for regular vehicular traffic, including commercial parking lots, access roads where heavy vehicles are a regular component of the daily traffic volume. Belgard pavers with a **minimum thickness of 80mm and a maximum ratio of 3:1** are suitable for this application. Herringbone laying pattern is recommended on all roadways. Typical lifetime ESALs typically are > 30,000 ESALs and > 5 heavy vehicles per day.

The information set forth herein is for general informational purposes only. All such information is provided in good faith, however Oldcastle APG, Inc. and its affiliates make no representation or warranty of any kind, express or implied, regarding the accuracy, adequacy, validity, reliability, availability or completeness of any of the information and shall have no liability to any party for loss or damage incurred as a result of the use or reliance on any information provided herein. Any use of the information is at the user's sole risk.

BELGARD PAVER


COLORS & FINISHES OFFERING

Finishes



SMOOTH (STANDARD)

Unit surfaces and micro chamfers are precision molded using high-quality machined steel shoe assemblies for smooth surfaces and detailed chamfers.



GROUND FACE

The top of the paving units are ground smooth which exposes the aggregate colors and pigmented background.



TEXTURED (SLATE)

Units are molded to form a surface that emulates natural stone with a sculpted, textured finish.



SHOT BLAST

Exposes the surface of the paving unit to reveal the natural beauty of the aggregates and pigmentation.

Solid Colors

PEARL



SMOOTHSHOT BLASTGROUND FACE

FOG



SMOOTHSHOT BLASTGROUND FACE

DESERT



SMOOTHSHOT BLASTGROUND FACE

ALMOND





SMOOTHSHOT BLASTGROUND FACE

SUEDE




SMOOTHSHOT BLASTGROUND FACE

RUST





SMOOTHSHOT BLASTGROUND FACE

SUNSET





SMOOTHSHOT BLASTGROUND FACE

MIDNIGHT





SMOOTHSHOT BLASTGROUND FACE

Additional Solid Colors ALSO AVAILABLE IN SHOT BLAST AND GROUND FACE





LINENREDBOURBONROSEWOOD

Tone-On-Tone Colors



HICKORYSEPIASCANDINA GRAY



ANTHRACITE SHADED GRAY




✓ Bold, vibrant color that resists fading

✓ High-definition finish for a smoother, tighter texture


✓ Engineered to withstand unpredictable weather and freeze-thaw conditions

Note: Belgard® cannot guarantee printed color swatches will match actual product. All colors shown are approximate representations of the standard product. Actual colors may vary slightly due to batch variances and environmental conditions at time of photography. Actual sizes may vary by region. Please contact your local Belgard representative for accurate samples, availability and pricing.


Blended Colors




CHESWICK




IRON BAY



ASHWOOD



NEWPORT GRAY



TEAK

Local Colors



BRAZOS BLEND



BRITTANY BEIGE



CINNA BLEND



CRAB ORCHARD



DANVILLE BEIGE



DESERT SAND



FOSSIL BEIGE



HILL COUNTRY




IVORY



LUEDERS GRAY



RED/CHARCOAL
FLASH



RIO



SILVERADO



Dimensions™ Series Vehicular & Architectural Pavers

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	
								Smooth	Textured	Ground Face	Shot Blast			
3-PIECE SYSTEM														
 Dimensions 6	30 mm 60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm					✓	✓				3 mm	120 105
 Dimensions 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm					✓	✓				3 mm	120
 Dimensions 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓	✓				3 mm	112.5
SINGLE PIECE														
 3" x 9"	60mm 80 mm	3" x 9"	60mm 80 mm	80 mm	80 mm	80 mm		✓	✓				3 mm	90
 3" x 12"	60 mm, 80 mm, 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm			✓	✓				3 mm	110 (60 mm) , 88 (80 mm), 66 (101.6 mm)
 3" x 18"	101.6 mm	3" x 18"	101.6 mm	101.6 mm	101.6 mm			✓	✓				3 mm	49.5
 3" x 24"	101.6 mm	3" x 24"	101.6 mm	101.6 mm	101.6 mm			✓	✓				3 mm	66
 3" x 30"	101.6 mm	3" x 30"	101.6 mm	101.6 mm	101.6 mm			✓	✓				3 mm	41.25
 6" x 6"	60 mm, 80 mm, 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm			✓	✓				3 mm	120 (60 mm) , 96 (80 mm), 72 (101.6 mm)
 6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm		✓	✓				3 mm	112.5 (60 mm) 90 (80 mm)
 6" x 12"	60 mm, 80 mm, 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm		✓	✓	✓			3 mm	120 (60 mm), 96 (80 mm), 72 (101.6 mm)
 6" x 24"	101.6 mm	6" x 24"	101.6 mm	101.6 mm	101.6 mm			✓	✓				3 mm	60
 6" x 36"	101.6 mm	6" x 36"	101.6 mm	101.6 mm	101.6 mm			✓	✓				3 mm	45
 6" x 48"	101.6 mm	6" x 48"	101.6 mm	101.6 mm	101.6 mm			✓	✓				3 mm	60
 9" x 18"	60 mm	9" x 18"	60 mm					✓	✓				3 mm	112.5
 12" x 12"	60 mm, 80 mm, 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm			✓	✓				3 mm	120 (60 mm), 96 (80 mm), 72 (101.6 mm)
 12" x 18"	60 mm	12" x 18"	60 mm					✓	✓				3 mm	120
 12" x 24"	60 mm	12" x 24"	60 mm					✓	✓				3 mm	120
 15" x 30"	60 mm	15" x 30"	60 mm					✓	✓				3 mm	93.75
 18" x 18"	60 mm	18" x 18"	60 mm					✓	✓				3 mm	90
 18" x 24"	60 mm	18" x 24"	60 mm					✓	✓				3 mm	120
 18" x 36"	60 mm	18" x 36"	60 mm					✓	✓				3 mm	90
 24" x 24"	60 mm	24" x 24"	60 mm					✓	✓				3 mm	80
 24" x 30"	60 mm	24" x 30"						✓	✓				3 mm	100
24" x 36"	60 mm	24" x 36"	60 mm					✓	✓				3 mm	120

PICTURED ON SPREAD: DIMENSIONS SERIES



Moduline Series® Vehicular & Architectural Pavers														
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	
								Smooth	Textured	Ground Face	Shot Blast			
 4" x 12"	80 mm	4" x 12"	80 mm	80mm			✓	✓				3 mm	85	
 4" x 18"	80 mm	4" x 18"	80 mm				✓	✓				3 mm	72	
 4" x 24"	80 mm	4" x 24"	80 mm				✓	✓				3 mm	96	
 4" x 30"	80 mm	4" x 30"	80 mm				✓	✓				3 mm	53.33	
 3-Piece	80 mm	6" x 6" 6" x 12" 12" x 12"	80 mm	80 mm	80 mm		✓	✓				3 mm	96	
 5-Piece	80 mm	6" x 6", 6" x 9", 9" x 9", 6" x 12", 9" x 12"	80 mm	80 mm	80 mm		✓	✓				3 mm	96	

Geometric Shapes														
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	
								Smooth	Textured	Ground Face	Shot Blast			
 Diamond	60 mm	12" x 12"	60 mm					✓	✓				3 mm	93.53
 12" Parallelogram (60° angle)	60 mm	3" x 12"	60 mm					✓	✓				3 mm	85.73
 18" Parallelogram (60° angle)	60 mm	6" x 18"	60 mm					✓	✓				3 mm	114.31
 Hexagon	60 mm 80 mm	12" x 12"	60 mm	80 mm				✓	✓				3 mm	100.02 (60 mm) 73.04 (80 mm)

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.
 Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

Vehicular & Architectural Pavers															
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	
									Smooth	Textured	Ground Face	Shot Blast			
 Brooklyn™	60 mm	3" x 9"	60 mm	60 mm							✓			N/A	112.5
 Cambridge Cobble® (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓				Round Chamfer	120
 Cambridge Cobble® 6 x 6	60 mm 80 mm	6" x 6"	60 mm	80 mm						✓				Round Chamfer	120 (60 mm) 96 (80 mm)
 Cambridge Cobble® 6 x 9	60 mm 80 mm	6" x 9"	60 mm	80 mm						✓				Round Chamfer	120 (60 mm) 96 (80 mm)
 Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm						✓					Rolled Edge	103.9
 Empire™	60 mm 80 mm	3" x 12"	60 mm	80 mm							✓			–	120 (60 mm) 96 (80 mm)
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	✓	✓	✓					7 mm	120 (60 mm) 96 (80 mm)
 Melville™ Plank Small (3 pc)	60 mm	5" x 11¾" 5" x 15¾" 5" x 19⅛"	60 mm				✓		✓					3 mm	114.53
 Melville™ Plank Large (3 pc)	60 mm	7½" x 11¾" 7½" x 15¾" 7½" x 19⅛"	60 mm				✓		✓					3 mm	122.71
 Papyrus™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓				✓			3 mm	112.5
 Travertino	30 mm 60 mm	6" x 6" 6" x 12" 12" x 12"	30 mm 60 mm					✓			✓			N/A	192 120
TRUNCATED DOME PAVERS															
 4" x 8" ADA Truncated Dome	60 mm	4" x 8"	60 mm					✓						7 mm	120
 12" x 12" ADA Truncated Dome	60 mm	12" x 12"	60 mm					✓		✓				7 mm	120

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.



Melville Plank



EXPLORE
MORE
PAVERS



Empire




Papyrus 18



Cambridge Cobble




Geometric Shapes

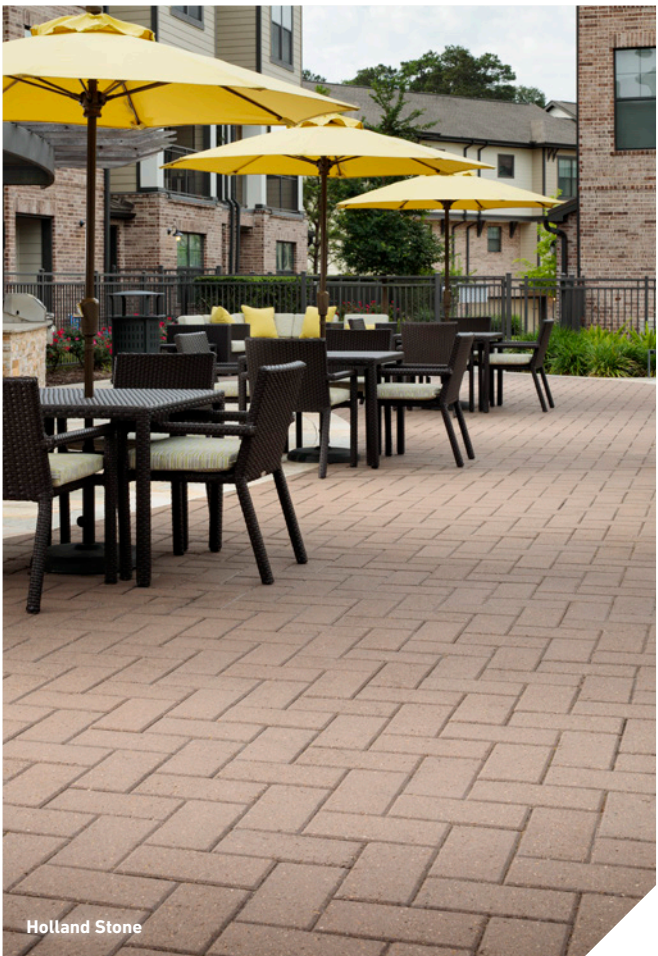

Holland Stone


Permeable Pavers																
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECH. INSTALL	FINISHES				MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
									Smooth	Textured	Ground Face	Shot Blast				
AQUALINE™ SERIES																
 3" x 12"	80 mm	3" x 12"	80 mm	80 mm			✓		✓				7 mm	10%	3 mm	88
 4.5" x 9"	80 mm	4½" x 9"	80 mm	80 mm			✓		✓				10 mm	10%	3 mm	90
 6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓		✓				7 mm	7%	3 mm	96
 6" x 12"	80 mm	6" x 12"	80 mm	80 mm			✓		✓				7 mm	5%	3 mm	96
 9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80 mm		✓		✓				10 mm	6%	3 mm	90
 Ashlar 3-Piece	80 mm	4½" x 9" 4½" x 4½" 9" x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓				10 mm	12%	3 mm	96
ADDITIONAL PRODUCT LINES																
 Eco Dublin®	80 mm	6¹⁵⁄₁₆" x 3⁷⁄₁₆" 6¹⁵⁄₁₆" x 6¹⁵⁄₁₆" 6¹⁵⁄₁₆" x 10⁹⁄₁₆"	80 mm	80 mm			✓	✓	✓				12 mm	7%	N/A	91.6

Concrete Grid Pavements													
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	FINISHES				% SURFACE OPENING	SQ. FT. PER PALLET
								Smooth	Textured	Ground Face	Shot Blast		
 Turfstone™	80 mm	15¾" x 23¾"	80 mm	80 mm				✓				40%	101

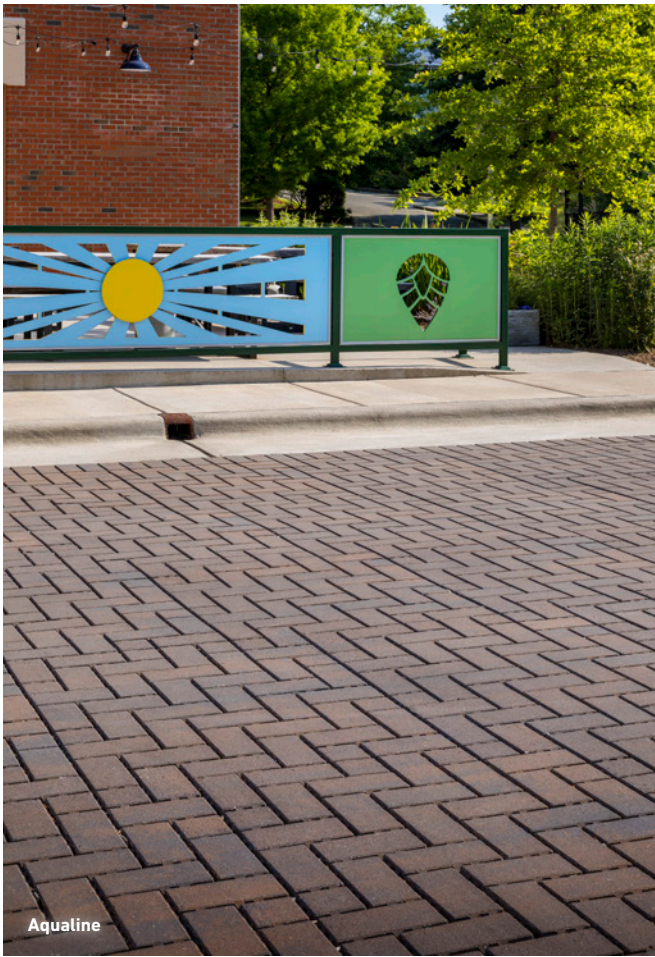



EXPLORE MORE
PERMEABLE
PAVERS

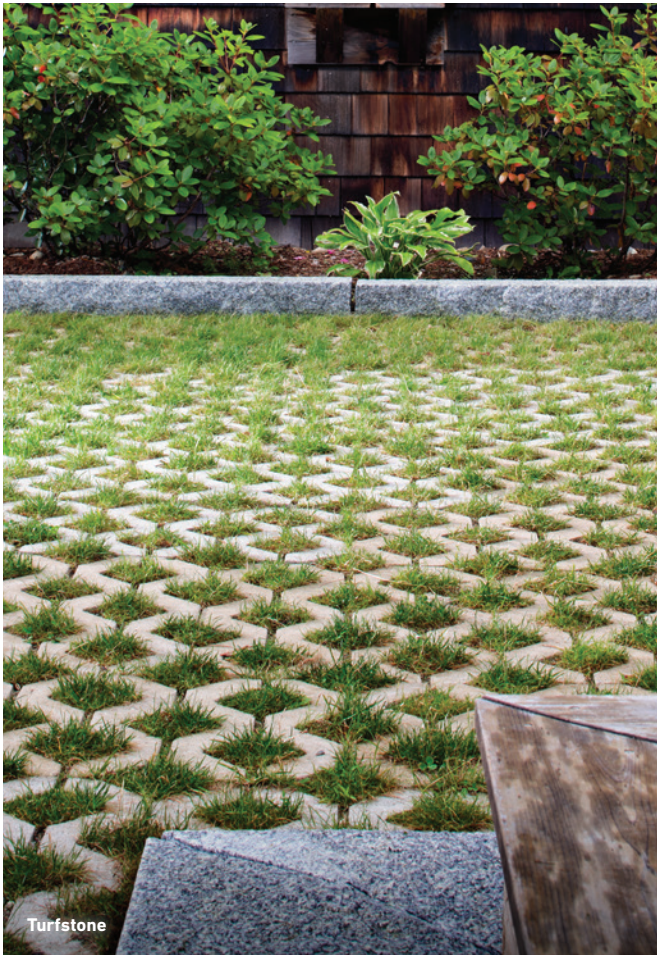

Porcelain Pavers										
UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
										
STONE FINISH										
 Na.Me	Stone	¾"	24" x 24"	Bourgogne, Jura Beige	✓	✓	232.5	60	2,160	
 Norr	Stone	¾"	24" x 24"	Vit, Gra, Svart, Farge, Hav, Oken, Grus	✓	✓	232.5	60	2,160	
 November	Stone	¾"	24" x 24"	Rain, Wind, Warm, Land	✓	✓	232.5	60	2,162.25	
 Quarziti 2.0	Stone	¾"	24" x 24"	Glacier, Mountains, Waterfall, River	✓	✓	232.5	60	2,160	
 Quarziti 2.0	Stone	¾"	24" x 48"	Glacier, Mountains, Waterfall, River	✓	✓	271.25	35	2,582	
 Travertini Cross Cut	Travertine	¾"	24" x 24"	Pearly, Light, Misty, Rustic	✓	✓	232.5	60	2,160	
 Travertini Cross Cut	Travertine	¾"	24" x 48"	Pearly, Light, Misty, Rustic	✓	✓	271.25	35	2,582	
 Travertini Vein Cut	Travertine	¾"	24" x 48"	Light, Dark, Misty	✓	✓	271.25	35	2,582	
WOOD FINISH										
 Jurupa	Wood	¾"	24" x 24"	Cool, Master, Camp	✓	✓	232.5	60	2,160	
 Kao	Wood	¾"	12" x 48"	Hazelnut, Hazelnut Raw, Caramel, Caramel Raw, Spice, Spice Raw	✓	✓	279	72	2,664	
 Noon	Wood	¾"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,628	
 Oudh (special order - allow 12-14 weeks lead time)	Wood	¾"	12" x 48"	Cedro, Copahu, Elem, Jinkoh, Pino, Laos, Laodano	✓	✓	279	72	2,628	
CONCRETE FINISH										
 Glocal	Concrete	¾"	24" x 24"	Clear, Ideal, Type, Classic	✓	✓	232.5	60	2,160	
 Glocal	Concrete	¾"	24" x 48"	Clear, Ideal, Type, Classic	✓	✓	271.25	35	2,582	
VARIOUS										
 Unico 2.0	Various	¾"	12" x 24"	Glacier, Mountains, Waterfall, River, Pearly, Light, Misty	✓		254.82	108	2,080	

* It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

If installing on elevated surface over 3/4" all porcelain must have a factory applied fiber mesh backing.

Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit Belgard.com/porcelain for additional installation details.





EXPLORE MORE
PORCELAIN
PAVERS



Segmental Retaining Walls (SRW)																		
UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES (SOLD SEPARATELY)		TEXTURE		AVAILABLE FACE STYLES							BATTER/ SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut	Smooth	Quarried		
 Diamond® 9D	6"	17¾"	9"	Rear Lip		✓	✓		✓			✓		✓			10.6°	35.5
 AB® Classic	8"	18"	12"	Front Lip			✓		✓	✓							6°	40
 Diamond Pro®	8"	18"	12"	Rear Lip		✓	✓	✓	✓	✓	✓			✓	✓	✓	7.1°	36
 Diamond Pro® PS	8"	18"	12"		Fiberglass Pins	✓	✓		✓	✓	✓	✓	✓	✓			Near Vertical, 7.1°	36
 Diamond Pro® Air	8"	18"	11½"	Front Lug		✓	✓		✓	✓					✓		4°	36

Freestanding Walls (FSW)																		
UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES (SOLD SEPARATELY)		TEXTURE		AVAILABLE FACE STYLES							BATTER/ SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Antiqued	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut	Smooth	Quarried		
  Easton™ Wall	4"	8", 12"	8"				✓								✓		Vertical	39
 Easton™ Wall Universal	4"	12"	8"				✓								✓		Vertical	112 pieces
 Melville™ Wall	4"	20"	10"				✓								✓		Vertical	26.67
  Weston Stone™	4"	8", 12"	8"				✓		✓								Vertical	39
 Weston Stone™ Universal	4"	12"	8"				✓		✓								Vertical	112 pieces



Diamond Pro Smooth & Melville Wall



EXPLORE MORE
FREESTANDING &
RETAINING WALLS



Diamond Pro Air Straight



Diamond Pro Air Straight



Weston Stone



Diamond Pro Virtual Joint



Diamond Pro Quarried Face

BELGARD WALL

COLORS
OFFERING



GRAY



FOSSIL BEIGE



TAN



LUEDERS GRAY



HILL COUNTRY BLEND




LLANO BLEND



BAYOU BLEND



MIDNIGHT

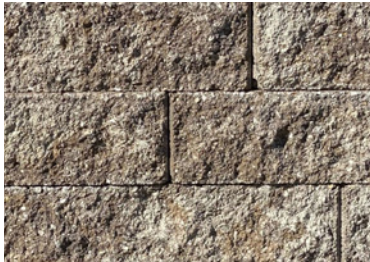

DANVILLE BEIGE



DANVILLE BEIGE QUARRIED



LUEDERS GRAY QUARRIED



LIMESTONE


AB® Fencing System							
UNITS	UNIT SIZE			TEXTURE		BATTER/ SETBACK	QTY PER PALLET
	Height	Width	Depth	Striated	Split		
Half	8"	5⅝"	9.188"	✓	✓	Vertical	144
Lite	4⅞"	5⅝"	17⅞"	✓	✓	Vertical	96
½ Lite	4⅞"	5⅝"	9.188"	✓	✓	Vertical	192
Post Block	8"	18"	12"	✓	✓	Vertical	48
Panel Block	8"	18"	6"	✓	✓	Vertical	72
Cap Block	4"	18"	12"	✓	✓	N/A	48



Accessories						
UNITS		SIZE	UNITS/ PALLET	LAYER/ PALLET	WEIGHT/ UNIT	WEIGHT/ PALLET (LBS)
ARTFORMS™						
	Artforms™	3" x 18" x 36"	9	9	–	2745
	Artforms™	3" x 6" x 36"	9	9	–	1095
STEP UNIT						
	Landings™ Step Unit	6" x 48" x 18"	2	–	462	924
COPING						
	Delmaro Coping	6" x 12" x 2⅜"	108	3	14.63	1580
	Grava Coping	36" x 15" x 2⅜"	18	6	179	3222
	Marina™ Coping	5¹⁵⁄₁₆" x 11¹³⁄₁₆" x 2⅜"	105	5	–	2751
	Modena Coping	36" x 15" x 2⅜"	18	6	179	3222
	Unico Porcelain Coping	12.99" x 23.54" x ¾"	120	–	–	2080



Landings Step Unit

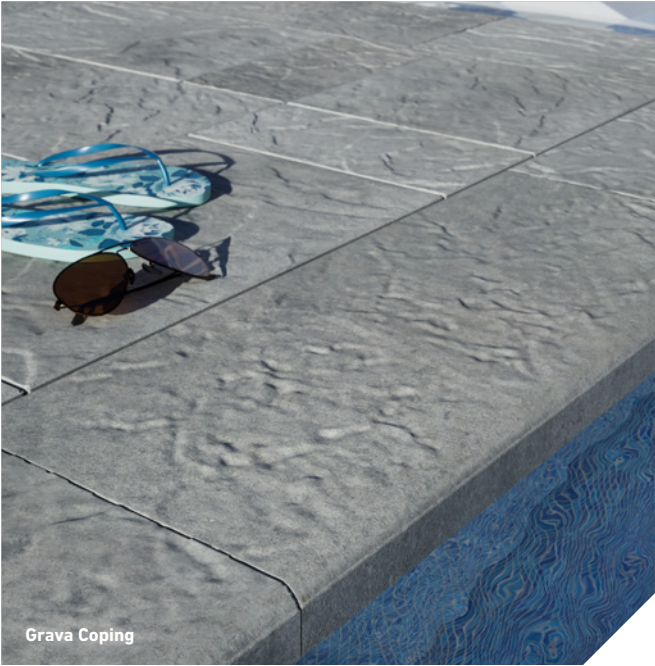


Grava Coping


BELGARD ACCESSORIES

COLORS
OFFERING

Artforms™



SCANDINA GRAY



SEPIA


Delmaro Coping



BOURBON



FOG




MIDNIGHT



PEARL

Grava Coping




ASHWOOD



CHESWICK



IRON BAY




NEWPORT GRAY




TEAK

Modena Coping




ANTHRACITE




HICKORY



SCANDINA GRAY



SEPIA



SHADED GRAY

Landings™ Step Unit




FOUNDRY




MOONLIGHT

Marina™ Coping



CHARCOAL



FOUNDRY



SUEDE

ROOFTOP PAVERS & PEDESTALS

Possibilities are endless when designing and building pedestal decks using Belgard Commercial Pedestals. The pedestal system’s elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building pedestal decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each pedestal paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific pedestal pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you’re done – saving time and money.

Specifications

- Supports up to 1000 lbs.
- Maximum elevation up to 36" using couplers and braces
- Impervious to water, mold & freeze-thaw
- Preassembled
- Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

Resources Available

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- Videos: planning, installation & more
- Take-off assistance
- Samples available
- Technical assistance
- Customer service





Model SE0
Adjusts from 1¼" - 1½"



Model SE1
Adjusts from 1½" - 2"



Model SE2
Adjusts from 2" - 3"



Model SE3
Adjusts from 3" - 4¾"



Model SE4
Adjusts from 4¾" - 6¾"



Model NM1
Adjusts from 1" - 1½"



Model NM2
Adjusts from 1½" - 2¾"



Model NM3
Adjusts from 2¾" - 4"



Model NM4
Adjusts from 3½" - 6½"



Model NM5
Adjusts from 6" - 10½"



Model B1
Adjusts from 1¼"-2" with ⅜" spacer tab



Model B2
Adjusts from 2"-3" with ⅜" spacer tab



Model B3
Adjusts from 3"-4¾" with ⅜" spacer tab



Model B4
Adjusts from 4¾"-7¾" with ⅜" spacer tab



Model C4
Coupler adds 2½"-4" in height to B3 & B4



Model PR1
Adjusts from 1.2"- 2.55"

Model PR2
Adjusts to 6.1"

Model PR3
Adjusts to 16"

	MODEL SE SUPPORTS	MODEL NM SUPPORTS	PEDESTAL PRIME SUPPORTS
Self Leveling Head	✓		✓
Fixed Head	✓	✓	✓
Adjustable	✓	✓	✓
Extendable w/ Coupler	✓	✓	✓
Adjustment Key	✓	✓	✓
Locking IPE Pins	✓	✓	✓
Recycleable (LEED)	✓	✓	✓
Loading Capacity	✓	✓	✓
Integrated Extension Coupler			✓

Rooftop Plaza Pavers											
UNITS	THICKNESS	SIZE	MATERIAL	FINISHES				PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
				Smooth	Matte	Shot Blast	Diamond				
Jewell Plaza Slabs	2"	24" x 24"	Concrete	✓				✓	88	22	1,771
Classic Plaza Slabs	2"	24" x 24"	Concrete	✓	✓	✓	✓	✓	Varies per selection. Contact your local Belgard Representative for more information.		
Delta Texada Plaza Slabs	1 13⁄16"	24" x 24"	Concrete	✓		✓		✓	-	-	-
Delta Texada Plaza Slabs	1 13⁄16"	12" x 24"	Concrete	✓		✓		✓	-	-	-
Delta Texada Plaza Slabs	1 13⁄16"	18" x 18"	Concrete	✓		✓		✓	-	-	-
Glocal	¾"	24" x 24"	Porcelain	✓				✓	232.5	60	2,160
Wood Plaza Slab	¾"	237⁄8" x 237⁄8"	Ipe	✓				✓	600	150	3,375
Quarziti 2.0	¾"	24" x 24"	Porcelain	✓				✓	232.5	60	2,160

Rooftop Pavers											
UNITS	THICKNESS	SIZE	MATERIAL	FINISHES				PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
				Smooth	Matte	Shot Blast	Diamond				
Ballast Pavers	1 5⁄8"	8½" x 16"	Concrete	✓					190	200	2,599


Cubes (Planters/Benches) & Cube Tops			
PRODUCT NAME	COMMON SIZES (CUSTOM SIZES AVAILABLE)	COLORS (CUSTOM COLORS AVAILABLE)	MINIMUM QTY
Powder Coated Aluminum Cube	24"L x 24"H x 20"H 24"L x 24"H x 36"H 48"L x 24"H x 20"H 48"L x 24"H x 36"H	Red, Black, White, Charcoal, Silver, Bronze, Zinc*	1
Ipe Cube	24"L x 24"H x 16.5"H 48"L x 24"H x 16.5"H	Brown (Natural variations to be expected)	1
Ipe Top	24"L x 24" H 48"L x 24"H	Brown (Natural variations to be expected)	1



ROOFTOP PAVER & ACCESSORIES

COLORS
OFFERING

Jewell Plaza Slabs

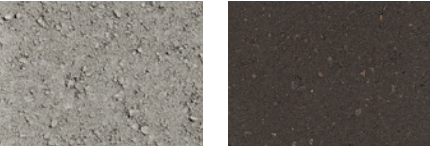


FOUNDRY GRAPHITE

Wood Pavers




CUMARU GARAPA ITAUBA IPE TIGERWOOD

Aluminum Cube Colors

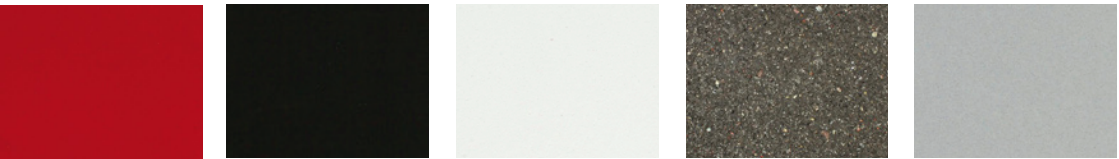

RED BLACK WHITE CHARCOAL SILVER

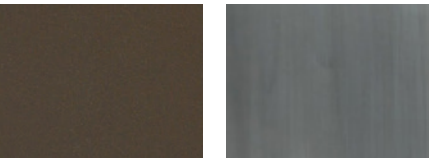

BRONZE ZINC (PREMIUM COLOR)

Classic Plaza Slab

SHOT BLAST




CHAMOIS CHARCOAL CINNAMON GINGER LIMESTONE NATURAL



RED SRI WHITE*

DIAMOND

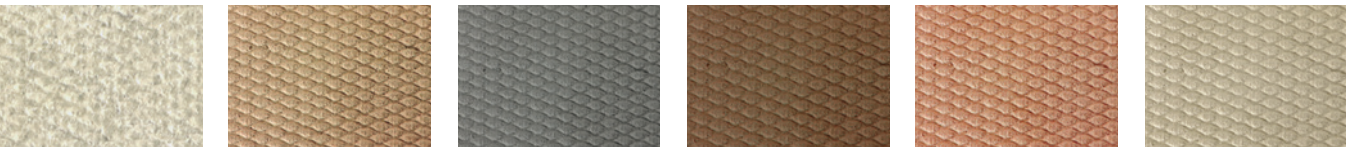

BROOKLYN CHAMOIS CHARCOAL CINNAMON GINGER LIMESTONE



NATURAL RED SRI WHITE*

MATTE



CHAMOIS CHARCOAL CINNAMON GINGER LIMESTONE NATURAL



RED SRI WHITE*

* SRI Color - Solar Reflective Index in Excess of 80. Contact your local Belgard® representative for more information.

Notice: Colors subject to change without prior notice. Colors in this brochure may vary from current stock. Actual samples are available from Belgard Commercial. Slight variations in color may occur during manufacturing. Slight scuffing may occur during handling.



Jewell Plaza Slabs



EXPLORE MORE
ROOFTOP PAVERS
& SLABS



Ballast Pavers



Ipe Wood Plaza Pavers

Pedestals & Accessories

PRODUCT NAME	PRODUCT DESCRIPTION	PIECES PER CARTON
STAR-T	3/8" - 9/16" (10-15mm)	50
STAR-B	3/16" Extension (5mm)	50
SE0-P	1.125" - 1.5" (28-38mm)	40
SE1-P	1.5" - 2" (37.5-50mm)	30
SE2-P	2" - 3" (50-75mm)	25
SE3-P	3" - 4.75" (75-120mm)	25
SE4-P	4.75" - 6.75" (120-170mm)	25
SE5-P	6.75" - 8.75" (170-215mm)	25
NM-1	1"-1.57" (25-40mm)	40
NM-2	1.57"-2.75" (40-70mm)	30
NM-3	2.36"-3.93" (60-100mm)	25
NM-4	3.54"-6.30" (90-160mm)	15
NM-5	5.90"-10.63" (150-270mm)	12
NM-EXT	5.7" Extension (145mm)	30
EH-12	1/2" Fixed (12mm)	250
EH-15	5/8" Fixed (16mm)	200
EH-20	3/4" Fixed (20mm)	150
RUB-14	1/4" Fixed RUBBER	150
RUB-38	3/8" Fixed RUBBER	150
RUB-PINS	1/4" Fixed w/ 4 Pins	100
PR1	1.2" - 2.55" Adjustable Pedestal	1 per box
PR2	6.1" Adjustable Pedestal	1 per box
PR3	16" Adjustable Pedestal	1 per box

Belgard has solutions for high wind applications and paver layout services. Please contact your local representative for more information.




Dimensions Series

MANUFACTURING LOCATIONS

- DENTON**
2640 Collins Rd
Denton, TX 76208
- ROSENBURG**
1607 Spur 529
Rosenburg, TX 77471
Ph: 281-342-8114
- WACO**
400 Jewell Drive
Waco, TX 76712
Ph: 254-772-3440

BELGARD RESOURCES


DESIGN FILES

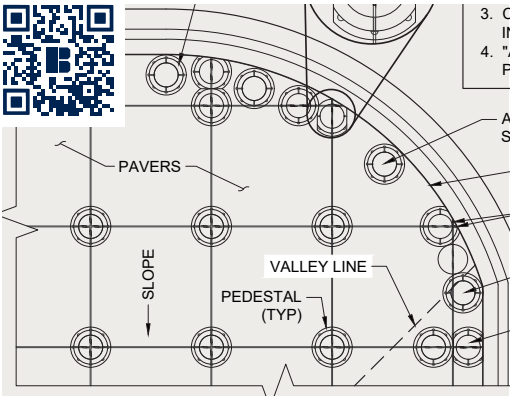

TECHNICAL RESOURCES



CONTINUING EDUCATION

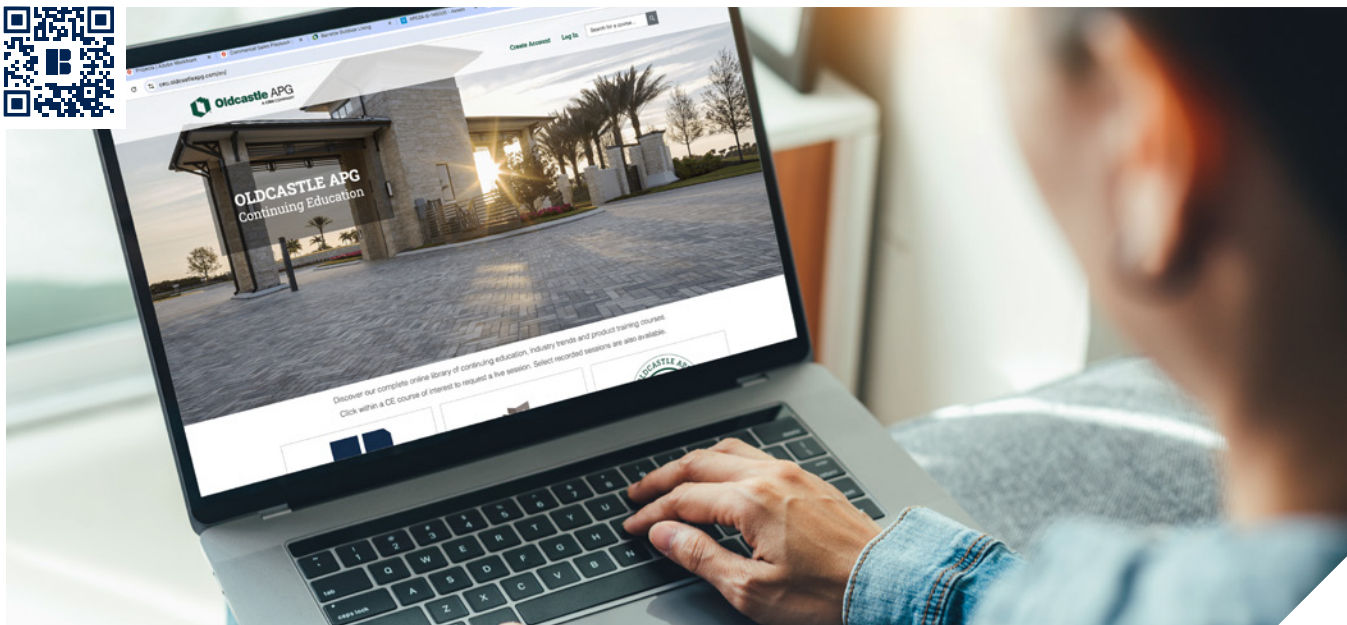

ORDER SAMPLES



FIND YOUR SALES REP

BELGARD®

AN OLDCASTLE® APG OUTDOOR BRAND

BELGARDCOMMERCIAL.COM

© 2026 Oldcastle® APG, Inc. All Rights Reserved. BELCOMM26-D-677700 | South Central | Revised 04/2026