



PAVER APPLICATIONS



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles


Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

BELGARD PAVER COLORS & FINISHES







Belgard Commercial allows you to customize your project with optional finishes: Smooth, Shot Blast and Ground face. Contact your Belgard Commercial Representative for more information.

Contact your Belgard Representative for custom finish options and sample products, as well as ADA Compliant products.

RUST



SHOT BLAST GROUND FACE







DESERT SAND











SUEDE



BURNT UMBER





















Shot Blast



MONSOON GREY











GRAPHITE













GREY MIST









LINEN







BLENDED COLORS




Macchiato




Silverado










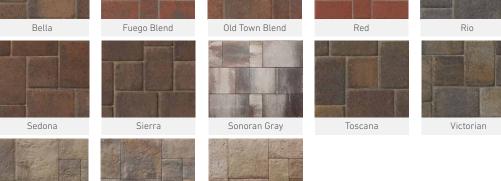

Echo Canyon

MODULINE	E SERIES® V	VEHICU	LAR &	ARCHI1	rectur	AL PAV	ERS								
					APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINIS	SHES		CHAMFER	SQ. FT. PER
UNITS		SIZE	Ä				F		Standard	Ground Face	Shot Blast	Antiqued	WIDTH	PALLET	
	4" x 12"	80 mm	4" x 12"	80 mm	80mm			√		\checkmark	√	√		3 mm	85
	4" x 18"	80 mm	4" x 18"	80 mm				✓		√	√	√		3 mm	36
	4" x 24"	80 mm	4" x 24"	80 mm				✓		√	✓	√		3 mm	48
* *	3-Piece Modular	80 mm	6" x 6", 6" x 12", 12" x 12"	80 mm	80 mm			√	✓	\checkmark	✓	√	√	3 mm	96
9,9,9	5-Piece Modular	80 mm	6" x 6", 6" x 9", 9" x 9", 6" x 12", 9" x 12"	80 mm	80 mm			√	✓	✓	✓	✓	√	3 mm	96


DIMENSIO	NS™ SERIES	S VEHIC	ULAR	& ARCI	HITECT	URAL P	AVERS								
					APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINIS	SHES		CHAMFER	SQ. FT. PER
UNITS		THICKNESS	SIZE	Ä				F	0-0	Standard	Ground Face	Shot Blast	Antiqued	WIDTH	PALLET
	3" x 12" (60 mm available in Striated face style)	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		√		√	✓	√		3 mm	55 (60 mm) 44 (80 mm) 66 (101.6 mm)
	3" x 18"	101.6 mm	3" x 18"	101.6 mm				\checkmark		√	√	√		3 mm	49.5
•	6" x 6"	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm		√		√	√	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
	6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	\checkmark		√	√	√	✓	3 mm	112.5 (60 mm) 90 (80 mm)
	6" x 12"	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm	✓		√	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
	9" x 9"	80 mm	9" x 9"	80 mm	80 mm	80mm		\checkmark		√	✓	√	√	3 mm	90
	12" x 12"	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm 101.6 mm	101.6 mm		✓		√	✓	√	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)
	12" x 18"	60 mm	12" x 18"	60 mm				\checkmark		√	✓	✓		3 mm	120
	12" x 24"	60 mm	12" x 24"	60 mm				\checkmark		√	✓	√		3 mm	120
	18" x 18"	60 mm	18" x 18"	60 mm				✓		✓	✓			3 mm	90
	18" x 24"	60 mm	18" x 24"	60 mm				\checkmark		\checkmark	✓			3 mm	120
	24" x 24"	60 mm	24" x 24"	60 mm				\checkmark		✓				3 mm	80
> > >	Dimensions [™] 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm				✓		√				3 mm	112.5
> 	Dimensions [™] 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm				✓		✓				3 mm	120
• • •	Dimensions [™] 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				\checkmark		✓				3 mm	120

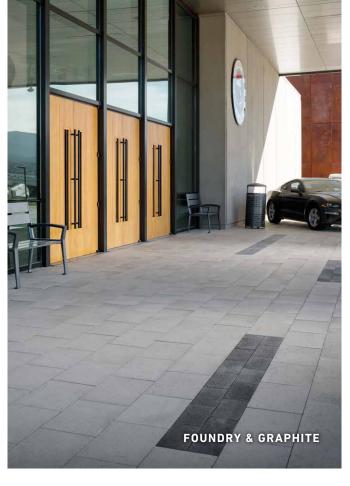







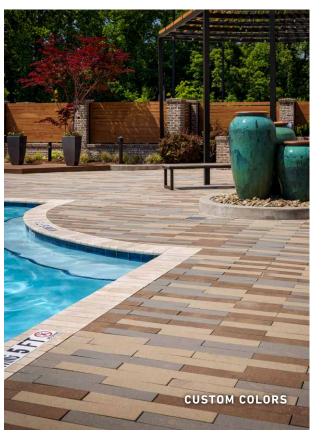





6 COMMERCIAL PRODUCT OFFERING


					APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINIS	SHES		CHANGED	60 FT DEE
UNITS		THICKNESS	SIZE	Ä		8 -8		F		Standard	Ground Face	Shot Blast	Antiqued	CHAMFER WIDTH	SQ. FT. PER PALLET
	Avalon Slate (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm				√		√				4 mm	120
	Bergerac® (3 pc)	60 mm	3%6" x 7½6", 7½6" x 7½6", 7½6" x 105%"	60 mm						✓			√	N/A	113
	Bergerac® (Lg Square)	60 mm	105%" x 105%"	60 mm						√			√	N/A	89
	Cambridge Cobble° (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						√			√	N/A	120
	Cambridge Cobble°	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm			√			√	N/A	112 (60 mm) 90 (80 mm)
	Cambridge Cobble® (Circle Kit)	60 mm	6" x various	60 mm						√			√	N/A	79
	Catalina™ Large (3 pc)	60 mm	6" x 12" 9" x 12" 12" x 12"	60 mm				✓		√				4 mm	120
	Dublin Cobble° (3 pc)	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						√	√	√	√	N/A	114
	Dublin Cobble® (Lg Square)	60 mm	9" x 9"	60 mm						√	√	√	√	N/A	106
	Holland Stone 4 x 4	60 mm 80 mm	4" x 4"	60 mm	80 mm	80 mm		*		√	√	√	√	4 mm	120 (60 mm) 96 (80 mm)
	Holland Stone 4 x 8	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	*		√	√	√	√	7 mm	120 (60 mm) 96 (80 mm)
•	Holland Stone 8 x 8	60 mm 80 mm	8" x 8"	60 mm 80 mm	80 mm	80 mm		√		√	√	√	√	4 mm	106 (60 mm) 94.8 (80 mm)
	Holland Handicapped Stall Kit	80 mm	Various	80 mm	80 mm	80 mm		√		√	√	√		4 mm	16
	Lafitt™ Grana Slab	50 mm	7 ³ / ₈ " x 14 ⁷ / ₈ " 14 ⁷ / ₈ " x 14 ⁷ / ₈ " 14 ⁷ / ₈ " x 22 ⁵ / ₈ "	50 mm				✓		√	√	✓		4.5 mm	163.2
	Lafitt™ Rustic Slab	50 mm	73/8" x 14//8" 14//8" x 14//8" 14//8" x 225//8"	50 mm				✓					✓	Variable	163.2
	Mega-Bergerac° (3 pc)	80 mm	4¾" x 9½" 9½" x 9½" 9½" x 14½"	80 mm									✓	N/A	88
	Mega-Bergerac® (Lg Square)	80 mm	14¾6" x 14¾6"	80 mm									✓	N/A	68


Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

^{*} May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

VEHICULAR & ARCHITECTUR	AL PAV	ERS (CO	DNTINU	JED)									
				APPLIC	CATIONS	ADA*	MECHANICAL INSTALL		FINIS	SHES		CHAMEED	SO ET DED
UNITS	THICKNESS	SIZE	Ä			E		Standard	Ground Face	Shot Blast	Antiqued	CHAMFER WIDTH	SQ. FT. PER PALLET
Mega-Lafitt™	80 mm	5¼" x 10½" 10½" x 10½" 10½" x 15¾"	80 mm								√	N/A	93
Mega-Lafitt™ (Lg Square)	80 mm	15¾" x 15¾"	80 mm								✓	N/A	93
Mega-Lafitt™ Grana (3 pc)	80 mm	5¼" x 10½" 10½" x 10½" 10½" x 15¾"	80 mm					√	✓	✓	√	N/A	93
Mega-Lafitt™ Grana (Lg Square)	80 mm	15¾" x 15¾"	80 mm					\checkmark	✓	✓	✓	N/A	93
Mega-Arbel*	60 mm	15%" x 21"	60 mm					\checkmark				N/A	104.4
Melville™ Plank Slim	60 mm	5" x 11 ¹³ /16" 5" x 15 ³ /4" 5" x 19 ¹¹ /16"	60 mm			√		√	✓	√		3 mm	114.5
Melville™ Plank Large	60 mm	7½" x 11 ¹³ /16" 7½" x 15¾" 7½" x 19 ¹¹ /16"	60 mm			✓		\checkmark	✓	√		3 mm	122.7
Old World Paver™	80 mm	51/8" x 73/4" 51/8" x 101/4" 51/8" x 1213/16"	80 mm								✓	N/A	90.27
Origins™ 18	60 mm	9" x 18" 18" x 18" 27" x 18"	60 mm			✓		\checkmark				3 mm	112.5
Origins™ 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm			✓		√				3 mm	120
Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm			√		√				3 mm	120

GEOMETRIC SHAPES													
				APPLIC	CATIONS	ADA*	MECHANICAL INSTALL		FINIS	SHES		CHAMEED	CO ET DED
UNITS	THICKNESS	SIZE	Ä			E.		Standard	Ground Face	Shot Blast	Antiqued	CHAMFER WIDTH	SQ. FT. PER PALLET
Diamond	60 mm	12" x 12"	60 mm			✓		\checkmark	√	√		3 mm	93.53
12" Parallelogram	60 mm	3" x 12"	60 mm			✓		√	✓	√		3 mm	85.73
18" Parallelogram	60 mm	6" x 18"	60 mm			√		√	✓	√		3 mm	114.31
Hexagon	60 mm	12" x 12"	60 mm			✓		√	✓	√		3 mm	100.02

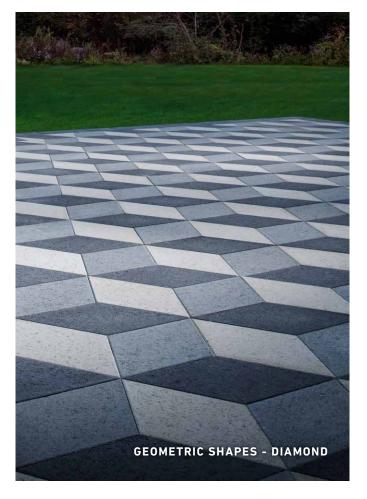

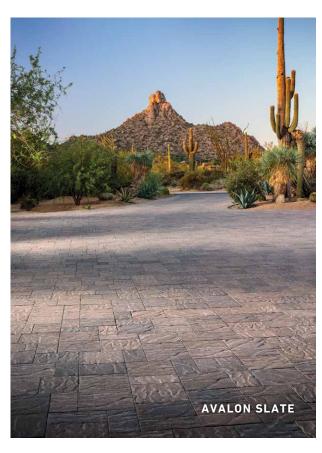










PERMEABLE PAVER	RS															
				APPLIC	ATIONS		ADA*	MECHANICAL INSTALL		FINIS	SHES		MANUF.	%	CHAMFER	SQ. FT.
UNITS	THICKNESS	SIZE	Ä				F		Standard	Ground Face	Shot Blast	Antiqued	JOINT WIDTH	SURFACE OPENING	WIDTH	PER PALLET
AQUALINE™ SERIES																
3" x 12"	80 mm	3" x 12"	80 mm	80 mm			✓		√	✓	✓	✓	7 mm	10%	3 mm	88
6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		√		√	√	√	√	7 mm	7%	3 mm	96
6" x 12"	80 mm	6" x 12"	80 mm	80 mm			✓		√	√	√	√	7 mm	5%	3 mm	96
12" x 12"	80 mm	12" x 12"	80 mm	80 mm			✓		✓	√	✓	✓	7 mm	3%	3 mm	96
ADDITIONAL PRODUCT LINES																
Aqua Roc™	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	√		√	✓	√	√	8 mm	9%	3 mm	90


CONCRET	E GRID PA	VEMEN	TS											
					APPLIC	CATIONS	ADA*	MECHANICAL INSTALL		FINIS	SHES		0/ CUDEACE	co et
UNITS		THICKNESS	SIZE	i			Ł.		Standard	Ground Face	Shot Blast	Antiqued	% SURFACE OPENING	SQ. FT. PER PALLET
3555	Turfstone™	80 mm	15¾" x 23½"	80 mm					√				40%	101

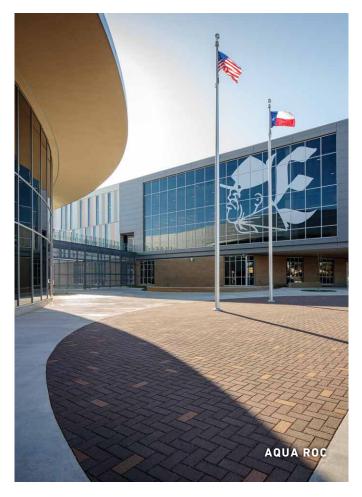







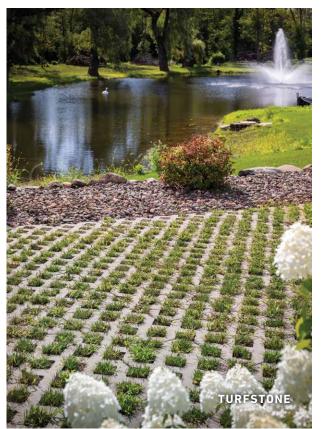



ORCEL	AIN PAVERS									
S		APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
	Ardesie	Stone	3/4"	24" x 24"	African Stone, Island, Shore*, Vulcan*, Black Reef*	✓	✓	232.5	60	2,160
	Clay (special order - allow 12-14 weeks lead time)	Concrete	3/4"	32" x 32"	Delight*, Awake*, Fancy*, Trust*	✓	✓	289.33	42	2,751
	Foundation	Concrete	3/4"	24" x 24"	Amber Beige, Scandina Gray	√	✓	275.04	-	2,517.36
	Genoa	Stone	3/4"	24" x 24"	Blanco, Crema	√	√	275.04	-	2,517.36
	Genoa	Stone	3/4"	12" x 24"	Blanco, Crema	✓	√	303.6	-	2,807
	Glocal	Concrete	3/4"	24" x 24"	Clear, Ideal, Type, Classic, Absolute*, Chamois*	✓	✓	232.5	60	2,160
	Glocal	Concrete	3/4"	24" x 48"	Clear, Ideal, Type, Classic, Absolute*, Chamois*	✓	√	271.25	35	2,621
	Glocal (special order - allow 12-14 weeks lead time)	Concrete	3/4"	48" x 48"	Ideal*, Type*, Classic*, Absolute*, Chamois*	✓	√	310	20	3,009
	Jurupa	Wood	3/4"	12" x 48"	Cool, Master, Camp	√	√	279	72	2,664
	Lagoon	Stone	3/4"	24" x 48"	Moonbeam, Sandshell, Atmosphere, Sharkskin, Cloudburst	√	√	271.25	35	2,621
	Lemmy (special order - allow 12-14 weeks lead time)	Concrete	3/4"	32" x 32"	Nimbus*, Excalibur*, Venom*, King*	✓	√	289.33	42	2,751
	Na.Me	Stone	3/4"	24" x 24"	Bourgogne, Jura Beige	✓	√	232.5	60	2,160
	Noon	Wood	3/4"	8" x 48"	Daylight, Ember, Honey	✓	✓	151.8	60	1,415
	Noon	Wood	3/4"	12" x 48"	Daylight, Ember, Honey	√	√	279	72	2,664
	Norr (special order - allow 12-14 weeks lead time)	Stone	3/4"	24" x 24"	Vit*, Gra*, Svart*, Varge*, Hav*, Oken*, Grus*	√	√	232.5	60	2,160
	Norr (special order - allow 12-14 weeks lead time)	Stone	3/4"	32" x 32"	Vit*, Gra*, Svart*, Varge*, Hav*, Oken*, Grus*	√	✓	289.33	42	2,751
	Norr (special order - allow 12-14 weeks lead time)	Stone	3/4"	36" x 36"	Vit*, Gra*, Svart*, Varge*, Hav*, Oken*, Grus*	√	✓	156.94	18	1,525

PORCELAIN PAVERS (CONTI	NUED)								
UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
Quarziti 2.0	Stone	3/4"	24" x 24"	Glacier, Mountains, Waterfall, River, Mantle	√	√	232.5	60	2,160
Quarziti 2.0	Stone	3/4"	12" x 24"	Glacier, Mountains, Waterfall, River, Mantle*	√	√	232.4	120	2,201
Quarziti 2.0 (special order - allow 12-14 weeks lead time)	Stone	3/4"	18" x 36"	Glacier*, Mountains*, Waterfall*, River*, Mantle*	√	✓	234.9	54	2,235
Quarziti 2.0	Stone	3/4"	24" x 48"	Glacier, Mountains, Waterfall, River, Mantle*	√	√	271.25	35	2,621
Silverlake	Stone	3/4"	24" x 24"	Braies, Resia, Moritz*, Nemi, Moro*, Orsi	√	√	232.5	60	2,160
Silverlake	Stone	3/4"	24" x 48"	Braies, Resia, Moritz*, Nemi, Moro*, Orsi	✓	✓	271.25	35	2,621
Silverlake (special order - allow 12-14 weeks lead time)	Stone	3/4"	32" x 32"	Braies*, Resia*, Moritz*, Nemi*, Moro*, Orsi*	√	✓	289.33	42	2,751
Verona	Stone	3/4"	24" x 24"	Blue Stone, Platinum, Taos, Yukon	√	√	232.5	60	2,160
Step Edge	Various	3/4"	13" x 24"	Glocal: Ideal, Type, Classic, Clear; Jurupa: Cool, Master, Camp; Lagoon: Moonbeam, Sandshell; Lemmy: Nimbus, Excalibur, Venom, King; Silverlake: Braies, Resia, Moritz*, Nemi, Moro*, Orsi	✓		254.82	120	2,080
Unico	Various	3/4"	13" x 24"	Ardesie: African Stone, Island; Glocal: Ideal, Type, Classic, Clear; Noon: Daylight, Ember, Honey; Quarziti 2.0: Glacier, Mountains, Waterfall, River; Verona: Blue Stone, Platinum, Taos, Yukon	✓		254.82	120	2,080



RESISTANT TO FREEZE THAW

Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F).



RESISTANT TO Breakage

Because every slab can withstand loads of over 2200 lbs.



RESISTANT TO CHEMICAL AGGRESSION

Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.



RESISTANT TO STAINS

Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.



EASY TO LAY

Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



EASY TO CLEAN

Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.**



EASY TO REMOVE


Because a 24" x 24" slab weighs just 37 lbs., its light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).



EASY FOR YOU


Because the structured top textures formed on the surface of our pavers create slip resistant surfaces.

^{**} It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

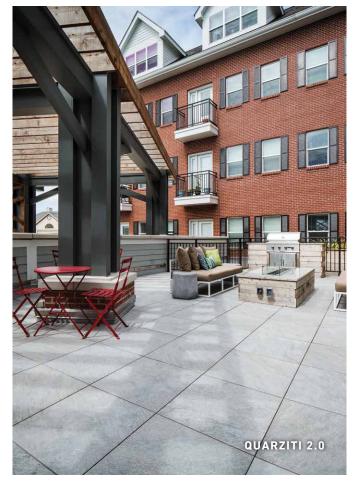





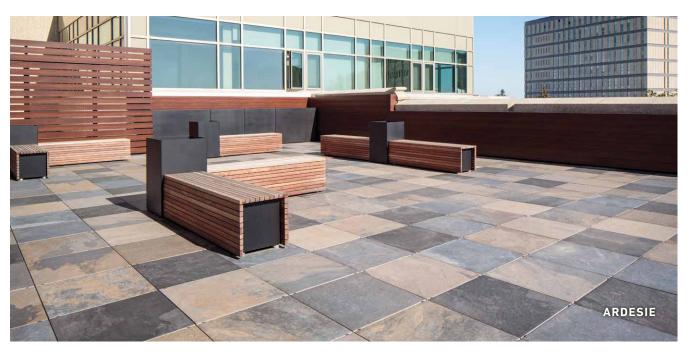






SEGMENT	AL RETAIN	ING A	AND FR	REEST	TANDII	NG WAI	LLS (SF	RW & F	SW)									
			UNIT SIZE		CONNECT	TION TYPE	ACCESS (SOLD SEP			TEXTURE				FACE STYLES			BATTER/	SQ. FT.
UNITS		Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Beveled	Virtual Joint	Quarried	Stone Cut	SETBACK	PER PALLET
	Ashlar Tandem™	7"	13¾16" 15¹¾16" 18¾16"	25/8"	Tandem Modular Block	Polypropylene Connectors			✓			✓					Vertical or 4°	70.1
	Celtik° Wall 90mm	3%6"	67/16" 107/16" 139/16" 171/8" 67/16"	8%"		Plastic Clips		√		√						√	Vertical or 9°	33
999	Celtik° Wall 135mm	55⁄16	6%6" 10%6" 13%6" 17%"	8%"		Plastic Clips		✓		✓						✓	Vertical or 9°	36
	Diamond® 9D	6"	17¾"	9"	Rear Lip					✓		✓					10.6°; 1.125" Per Course	43.1
	Diamond® 9D Virtual Joint	6"	17 ¾"	9"	Rear Lip					✓				✓			10.6°; 1.125" Per Course	43.1
	Diamond Pro® PS Straight Face	8"	18"	12"		Fiberglass Pins	\checkmark			✓		✓					Near Vertical, 7.1°	36
	Diamond Pro® PS Beveled Face	8"	18"	12"		Fiberglass Pins	✓			√			√				Near Vertical, 7.1°	36
	Diamond Pro® PS Quarried Face	8"	18"	12"		Fiberglass Pins	✓		√						✓		Near Vertical, 7.1°	36
	Mega Tandem™ 3-in-1 System	12"	3"	24"		41", 22" & 7" Polypropylene Connectors			✓								2.4°	96
	Melville™ Wall	4"	20"	10"								√					Vertical	26.67
	Melville Tandem™	7"	13¾16", 15 ¹³ ⁄16", 18 ⁷ ⁄16"	25/8"		Polypropylene Connectors						✓					0 / 4°	70
	Sterling [™] Freestanding or Retaining	6"	73/4"	12"		Fiberglass Pins				√		✓					Near Vertical, 10.6°	28.35
	Tandem® Modular Block	7½16"	77/8"	7%"													N/A	
	Tensar Mesa Wall	8"	18"	11"		Plastic Clips				√							Near Vertical 4.5° Setback	40
I To	Vertica® Planter Unit	8"	18"	16"	Surface Lug					✓							5" Nominal	30
	Weston Stone™ Universal	4"	12"	8"							✓	√					Vertical	42

24 COMMERCIAL PRODUCT OFFERING *Sold separately: all walls have available cap options. Contact your representative for more information.

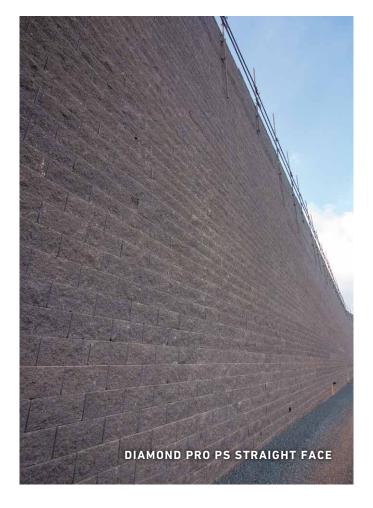













ROOFTOP PAVERS & PEDESTALS

Possibilities are endless when designing and building plaza decks using Belgard Commercial Pedestals. The pedestal system's elevation range of 1/8" - 36" allows for building plaza decks over almost any sloping or difficult surface.

Building plaza decks over occupied space has never been easier. The unique screw-to-adjust feature eliminates tedious and time-consuming installation often associated with constructing level decks over sloping surfaces. Construction crews quickly level each plaza paver by adjusting pedestal height, even while loaded.

Future access to waterproofing entails simply removing specific plaza pavers. Pedestal adjustments within the allowed range are accomplished by merely adjusting pedestal height and you're done – saving time and money.

SPECIFICATIONS

- Supports up to 1000 lbs.
- Maximum elevation up to 36" using couplers and braces
- Impervious to water, mold & freeze-thaw
- Preassembled
- · Packaged in weather-resistant boxes
- Contains 20% post-industrial recycled material
- Engagement "bumps" warn of over-extension

RESOURCES AVAILABLE

- CAD details
- Specifications
- Technical cut sheets
- Maintenance guide
- · Videos: planning, installation & more
- Take-off assistance
- Samples available
- Technical assistance
- · Customer service





Model SE0
Adjusts from 11/4"- 11/2"



Model SE1
Adjusts from 1½"- 2"



Model SE2
Adjusts from 2"- 3"



Model SE3
Adjusts from 3"- 43/4"



Model SE4
Adjusts from 4¾" - 6¾"



Model NM1 Adjusts from 1"- 1½"



Model NM2
Adjusts from 1½"- 2¾"



Model NM3
Adjusts from 21/3"- 4"



Model NM4 Adjusts from 3½"- 6⅓"



Model NM5 Adjusts from 6" - 101/2"



Model PR1 Adjusts from 1.2"- 2.55"

Model PR2
Adjusts to 6.1"

Model PR3 Adjusts to 16"

	MODEL SE SUPPORTS	MODEL NM SUPPORTS	PEDESTAL PRIME SUPPORTS
Self Leveling Head	√		✓
Fixed Head	√	✓	√
Adjustable	√	√	√
Extendable w/ Coupler	√	✓	√
Adjustment Key	√	✓	✓
Locking IPE Pins	√	✓	✓
Recycleable (LEED)	√	√	√
Loading Capacity	√	√	√
Integrated Extension Coupler			√

ROOFTOP PLAZ	ZA SLAB	S					
	DAVED	PAVER	APPLIC	ATIONS	ADA	CO ET DED	PALLET
UNITS	PAVER THICKNESS	SIZE	À	ROOFTOPS & PLAZAS	Ŀ	SQ. FT. PER PALLET	WEIGHT (LBS)
Saturna 12 x 24	50 mm	12" x 24"	√	√	√	135	2,900
Saturna 24 x 24	50 mm	24" x 24"	√	√	√	96	2,300
Saturna 18 x 18	40mm	18" x 18"	√	√	√	100	2,400
Texada 12 x 24	50 mm	12" x 24"	✓	√	√	135	2,900
Saturna 24 x 24	50 mm	24" x 24"	√	✓	√	96	2,300
Saturna 18 x 18	40 mm	18" x 18"	√	√	√	100	2,400
Western Plaza Slab	1 ¹³ / ₁₆ "	24" x 24"	√	√	√	96	2,208
Ipe Wood Plaza Slab	1.69"	24" x 24"	√	√	√	176	990.88
Ipe Wood Plaza Slab	1.69"	24" x 48"	√	√	√	176	990.88
Cumaru Wood Plaza Slab	1.69"	24" x 24"	√	√	√	176	990.88
Cumaru Wood Plaza Slab	1.69"	24" x 48"	√	✓	√	176	990.88


CUBES (PLANTERS/BENCHES) & CUBE TOPS				
PRODUCT NAME	COMMON SIZES (CUSTOM SIZES AVAILABLE)	COLORS (CUSTOM COLORS AVAILABLE)	MINIMUM QTY	
Powder Coated Aluminum Cube	24"L x 24"H x 20"H 24"L x 24"H x 36"H 48"L x 24"H x 20"H 48"L x 24"H x 36"H	Red, Black, White, Charcoal, Silver, Bronze, Zinc*	1	
Ipe Cube	24"L x 24"H x 16.5"H 48"L x 24"H x 16.5"H	Brown (Natural variations to be expected)	1	
Іре Тор	24"L x 24" H 48"L x 24"H	Brown (Natural variations to be expected)	1	

PEDESTALS & ACCESSORIES			
PRODUCT NAME	PRODUCT DESCRIPTION	PIECES PER CARTON	
STAR-T	3/8" - 9/16" (10-15mm)	50	
STAR-B	3/16" Extension (5mm)	50	
SE0-P	1.125" - 1.5" (28-38mm)	40	
SE1-P	1.5" - 2" (37.5-50mm)	30	
SE2-P	2" - 3" (50-75mm)	25	
SE3-P	3" - 4.75" (75-120mm)	25	
SE4-P	4.75" - 6.75" (120-170mm)	25	
SE5-P	6.75" – 8.75" (170-215mm)	25	
NM-1	1"-1.57" (25-40mm)	40	
NM-2	1.57"-2.75" (40-70mm)	30	
NM-3	2.36"-3.93" (60-100mm)	25	
NM-4	3.54"-6.30" (90-160mm)	15	
NM-5	5.90"-10.63" (150-270mm)	12	
NM-EXT	5.7" Extension (145mm)	30	
EH-12	1/2" Fixed (12mm)	250	
EH-15	5/8" Fixed (16mm)	200	
EH-20	3/4" Fixed (20mm)	150	
RUB-14	1/4" Fixed RUBBER	150	
RUB-38	3/8" Fixed RUBBER	150	
RUB-PINS	1/4" Fixed w/ 4 Pins	100	
PR1	1.2" - 2.55" Adjustable Pedestal	1 per box	
PR2	6.1" Adjustable Pedestal	1 per box	
PR3	16" Adjustable Pedestal	1 per box	

30 COMMERCIAL PRODUCT OFFERING **Premium color SOUTHWEST | AZ & NM 31





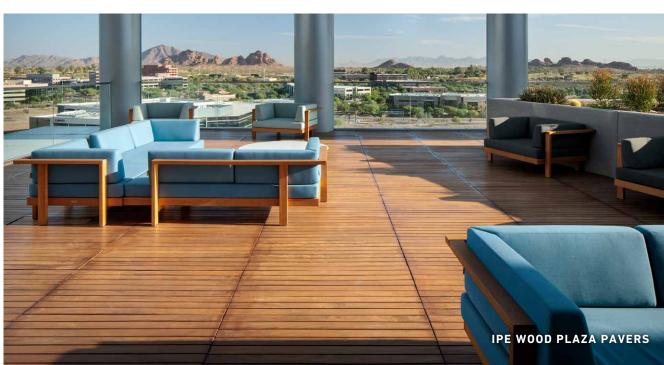

WESTERN PLAZA SLAB



WOOD PLAZA PAVERS

1105 - Ginger




1102 - Red


SATURNA



CUBE COLORS

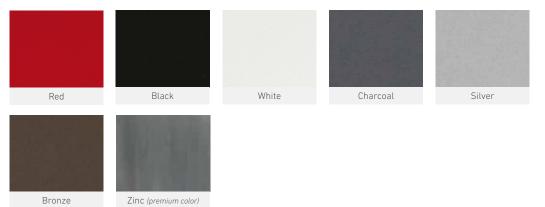



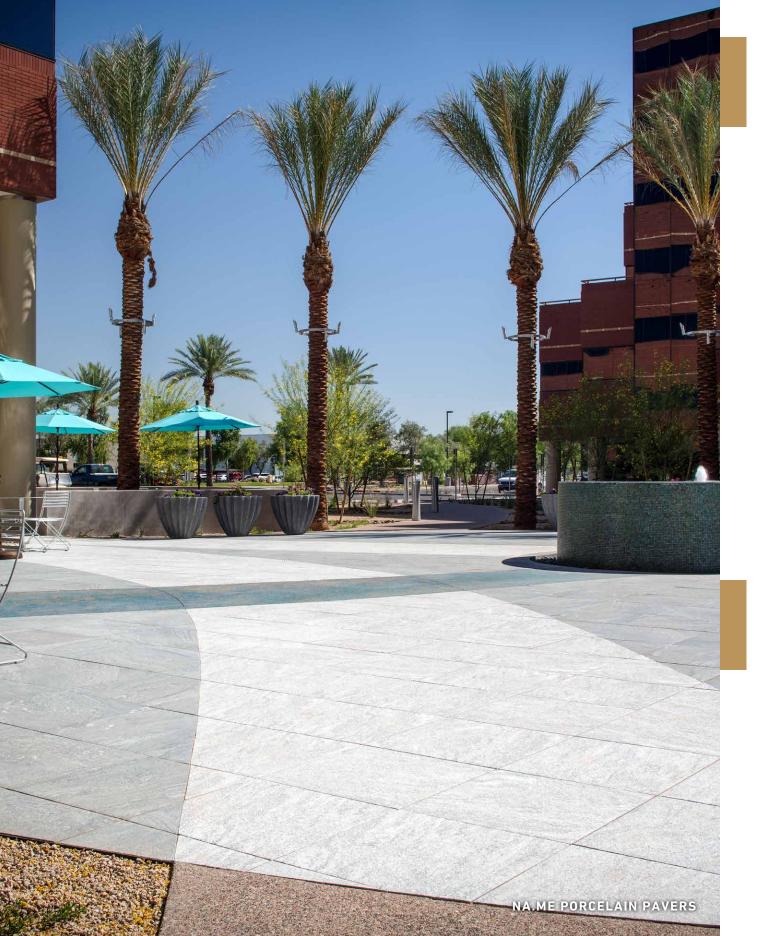

PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.

SUPERLITE LOCATION



Superlite Solution Center 1919 W Fairmont Dr Ste 5 Tempe, AZ 85282 Ph: 800-366-7877



BELGARDCOMMERCIAL.COM

©2023 Oldcastle APG, Inc. All Rights Reserved. BELCOMM23-D-3748