

COMMERCIAL

PRODUCT OFFERING

LOWER SOUTHEAST

GEORGIA & SOUTH ALABAMA



BELGARD
COMMERCIAL



PAVER FINISHES & APPLICATIONS

Finishes



Standard (smooth)

Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Sand Blast

Exposes the surface of the paving unit to reveal the natural beauty of the aggregates and pigmentation.



Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles









Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.


















Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

MODULINE SERIES® VEHICULAR & ARCHITECTURAL PAVERS																
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Ground Face	Sand Blast	Antiqued				
 4" x 18"	80 mm	4" x 18"	80 mm				✓		✓		✓		3 mm	72	144	2,592
 4" x 24"	80 mm	4" x 24"	80 mm				✓		✓		✓		3 mm	96	144	3,667

DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS																
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Ground Face	Sand Blast	Antiqued				
 Dimensions™ Antiqued	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓				3 mm	120	480	3,325
 Dimensions™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓			✓	3 mm	120	480	3,125
 Dimensions™ 12	60 mm	6" x 12" 12" x 12" 18" x 12"	60 mm				✓		✓				3 mm	120	120	3,516
 Dimensions™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓		✓				3 mm	112.5	50	3,075
 Dimensions™ Accent	60 mm	6" x 9"	60 mm				✓		✓				3 mm	120	320	3,232
 3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		✓		✓		✓		3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm)	440 (60 mm) 352 (80 mm) 264 (101.6 mm)	2,915 (60 mm) 3,168 (80 mm) 2,858 (101.6 mm)
 6" x 6"	60 mm 80 mm	6" x 6"	60 mm	80 mm	80 mm		✓		✓		✓	✓	3 mm	120 (60 mm) 96 (80 mm)	480 (60 mm) 384 (80 mm)	3,288 (60 mm) 3,456 (80 mm)
 6" x 12"	60 mm 80 mm	6" x 12"	60 mm	80 mm			✓		✓		✓		3 mm	120 (60 mm) 96 (80 mm)	240 (60 mm) 192 (80 mm)	3,240 (60 mm) 3,456 (80 mm)
 12" x 12"	60 mm 80 mm	12" x 12"	60 mm	80 mm			✓		✓		✓		3 mm	120 (60 mm) 96 (80 mm)	120 (60 mm) 96 (80 mm)	3,288 (60 mm) 3,456 (80 mm)

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

PAVER AVAILABLE COLORS

Dimensions Single Piece



Graphite



Foundry



Linen*



Desert



Sunset



Almond

* Light colored paver has an SRI value of ≥ 29 and/or an SR value of ≥ 0.33

Dimensions 6, 12 & 18



Aspen
(Also available in 6 x 9)



Avondale
(Also available in 6 x 9)



Belgian Stone**



Carriage House



Linen
(Only available in 18)

Dimensions Antiqued



Aspen



Avondale



Belgian Stone



Carriage House















DIMENSIONS SERIES
LINEN, SUNSET & FOUNDRY



MODULINE 4 X 24
GRAPHITE & FOUNDRY



DIMENSIONS 3 X 12
FOUNDRY

VEHICULAR & ARCHITECTURAL PAVERS (CONTINUED)																	
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
									Standard	Ground Face	Sand Blast	Antiqued					
 Belgian Cobble®	60 mm	Variable x 2⅜"	60 mm							✓			✓	N/A	68	320	1,640
 Cambridge Cobble®	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓			✓	Round Chamfer	126	528	3,310
 Cambridge Cobble® Border	60 mm	6" x 9"	60 mm							✓			✓	Round Chamfer	115	306	3,310
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	✓	80 mm	✓	✓	✓	✓	7 mm	120 (60 mm) 96 (80 mm)	540 (60 mm) 432 (80 mm)	3,120 (60 mm) 3,456 (80 mm)	
 Holland Stone ADA Truncated Dome	60 mm	4" x 8"	60 mm				✓		✓				7 mm	120	540	3,240	
 Lafitt® Paver	30 mm	7⅞" x 3⅞" 7⅞" x 7⅞" 7⅞" x 10⅝"	30 mm				✓		✓			✓	N/A	170	486	2,295	
 Mega-Arbel®	60 mm	15" x 21"	60 mm						✓				N/A	104.4	–	2,925	
 Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓				3 mm	120	480	3,125	
 Origins™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓		✓				3 mm	112.5	50	3,075	
 Origins™ Accent	60 mm	6" x 9"	60 mm				✓		✓				3 mm	120	320	3,232	
 Old World Paver™ <i>(special order)</i>	80 mm	5⅞" x 7¾" 5⅞" x 10¼" 5⅞" x 12⅞"	80 mm	80 mm 					✓				N/A	90	256	3,015	

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Δ For vehicular applications, it is recommended that pavers be installed on a concrete slab as designed by a local P.E.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

PAVER AVAILABLE COLORS

Belgian Cobble



Midnight



Moonlight

Cambridge Cobble



Avondale



Country Blend



Napoli



Graphite (6 x 9 only)

Holland Stone



Country Blend



Georgia Blend




Gray-Granite

Holland Stone ADA



Red*



Charcoal*

Lafitt Paver 30mm



Ashwood



Avondale

Mega-Arbel



Potomac



Savannah

Origins 6 & 18



Avondale*



Gray Granite



Belgian Stone*



Graphite* (6 x 9 only)

Old World Paver**





















Belgian Stone



River Street



PERMEABLE PAVERS																		
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Ground Face	Sand Blast	Antiqued						
AQUALINE™ SERIES																		
 4½" x 9"	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓	✓**	✓			✓	10 mm	10%	3 mm	90	320	3,100
 Ashlar 3-Piece <i>(special order)</i>	80 mm	4½" x 9" 4½" x 4½" 9" x 9"	80 mm	80 mm	80 mm	80 mm	✓	✓	✓			✓	10 mm	12%	3 mm	90	N/A	N/A
 9" x 9" L-Stone <i>(special order)</i>	80 mm	9" x 9" L-Stone	80 mm	80 mm	80 mm	80 mm	✓	✓	✓				7 mm	7%	3 mm	90	240	3,240
ADDITIONAL PRODUCT LINES																		
 Eco Urbana™	80 mm	3⅞" x 7⅞" 7⅞" x 7⅞" 7⅞" x 11⅜"	80 mm	80 mm			✓		✓				up to 10 mm	3%	7 mm	92	216	3,200
 Eco Urbana™ Large Square <i>(special order)</i>	80 mm	11⅜" x 11⅜"	80 mm	80 mm			✓		✓				up to 10 mm	2%	N/A	90	90	3,220

CONCRETE GRID PAVEMENTS																
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECHANICAL INSTALL	FINISHES				% SURFACE OPENING	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
									Standard	Ground Face	Sand Blast	Antiqued				
 Turfstone™	80 mm	15¾" x 23⅝"	80 mm						✓				40%	133	67	2,832

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

** Excluding antiqued finish

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

PERMEABLE AND GRID PAVER AVAILABLE COLORS

Aqualine 4.5 x 9



Avondale
(Special Order)



Graphite
(Special Order)



Gray-Granite

Eco Urbana



Avondale



Belgian Stone


Turfstone



Gray



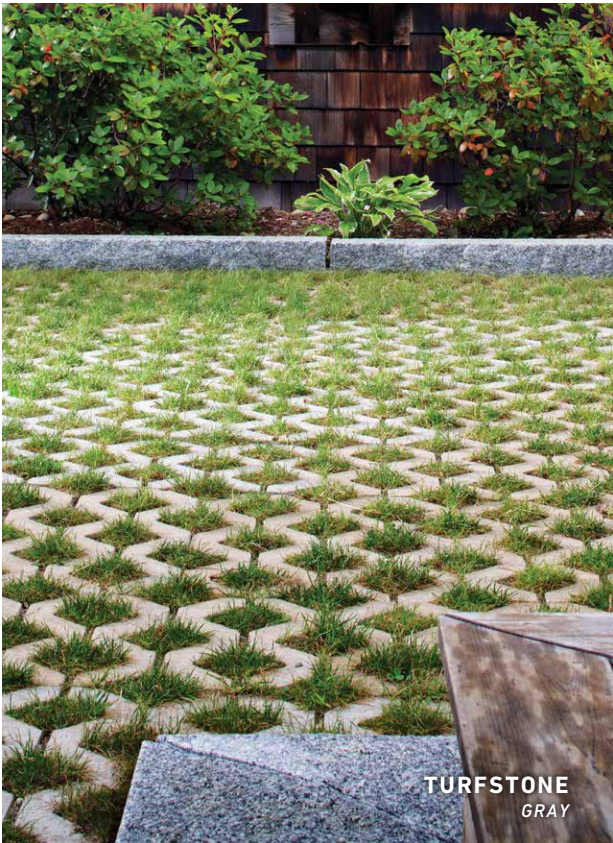


ECO URBANA
BELGIAN STONE



TURFSTONE
GRAY



AQUALINE 9" L-STONE
AVONDALE

PORCELAIN PAVERS							
UNITS	THICKNESS	SIZE	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
							
 Foundation	¾"	12" x 24"	✓	✓	303.6	–	2807
 Foundation	¾"	24" x 24"	✓	✓	275.04	–	2533.8
 Genoa	¾"	24" x 24"	✓	✓	275.04	–	2533.8
 Noon	¾"	12" x 48"	✓	✓	279	40	1,480

PORCELAIN PAVER AVAILABLE COLORS

Foundation



Amber Beige



Scandina Gray

Genoa



Blanco



Crema

Noon



Daylight
NN 01 NAT – V4



Ember
NN 02 NAT – V4






Honey
NN 03 NAT – V4












GENOA
CREMA



NOON
HONEY

SEGMENTAL RETAINING WALLS (SRW)																			
UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES (SOLD SEPARATELY)		TEXTURE			FACE STYLES					BATTER/ SETBACK	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight II	Beveled	Virtual Joint	Victorian	Stone Cut				
 Diamond Pro®	8"	18"	12"	Rear Lip		✓			✓		✓					7.1°	48	48	3,874
 Diamond Pro® PS <i>(special order)</i>	8"	18"	12"		Fiberglass Pins	✓			✓		✓					near vertical / 7.1°	48	48	3,874
 Mega Tandem™ 3-in-1 Wall System <i>(special order)</i>	12"	24"	3"		41", 22" & 7" Polypropylene Connectors			✓								2.4°	96	48	3,050

SPECIALTY PRODUCTS		
PRODUCT	SIZE	PALLET INFORMATION
 Anglia Edger®	5¼" x 8⅞" x 8" 5¼" x 10½" x 8" 5¼" x 15⅞" x 8" 5¼" x 18" x 8"	60 units per pallet
 Eastwood Copping 60mm	4" x 9" x 2⅝"	336 units per pallet
 Landings™ Step Unit	6" x 48" x 18"	2 units per pallet
 Fountainhead Remodel Coping	4" x 9" x 2⅝" 4" drop	336 units per pallet
 U Start Base Block®	Full Unit = 18⅞" x 12" x 3½" As Laid Unit = 16⅞" x 12" x 3½"	56 units per pallet

CAPS & CORNERS		
PRODUCT	SIZE	PALLET INFORMATION
 Diamond Pro® Cap	4"x18"x12"	64 units per pallet
 Diamond Pro® Corner	8"x18"x9"	40 units per pallet
 Tandem™ Cap	24" x 15" x 3¼"	32 units per pallet
 Tandem™ Column Cap	3¼" x 24" x 24"	16 units per pallet

SEGMENTAL RETAINING WALL AVAILABLE COLORS

Diamond Pro



Carriage House



Gray



Buff



Toccoa

Diamond Pro PS*



Carriage House



Gray



Buff



Toccoa

Mega Tandem*




Avondale



River Street



MEGA TANDEM
AVONDALE

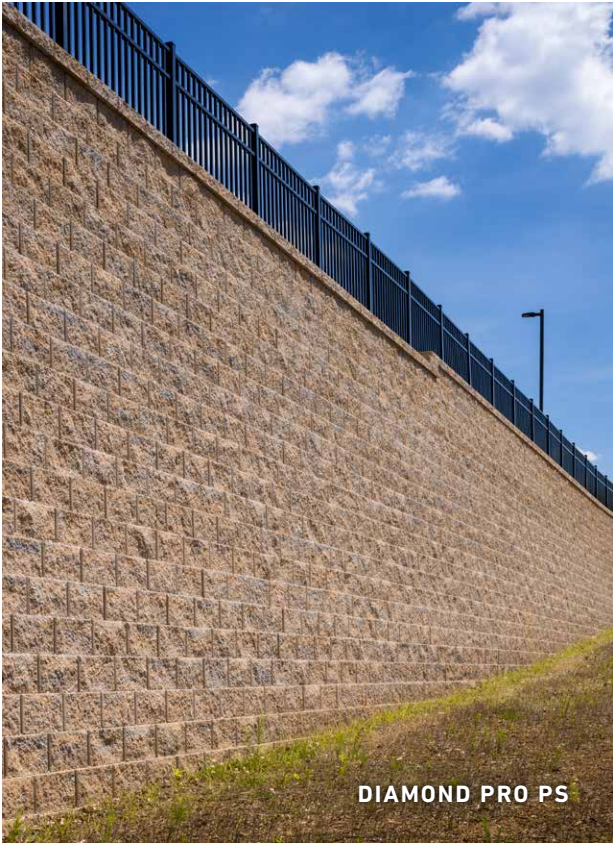

DIAMOND PRO PS



DIAMOND PRO
GRAY

SPECIALTY PRODUCT AVAILABLE COLORS


Anglia Edger



Cotswold Mist



Gascony Tan

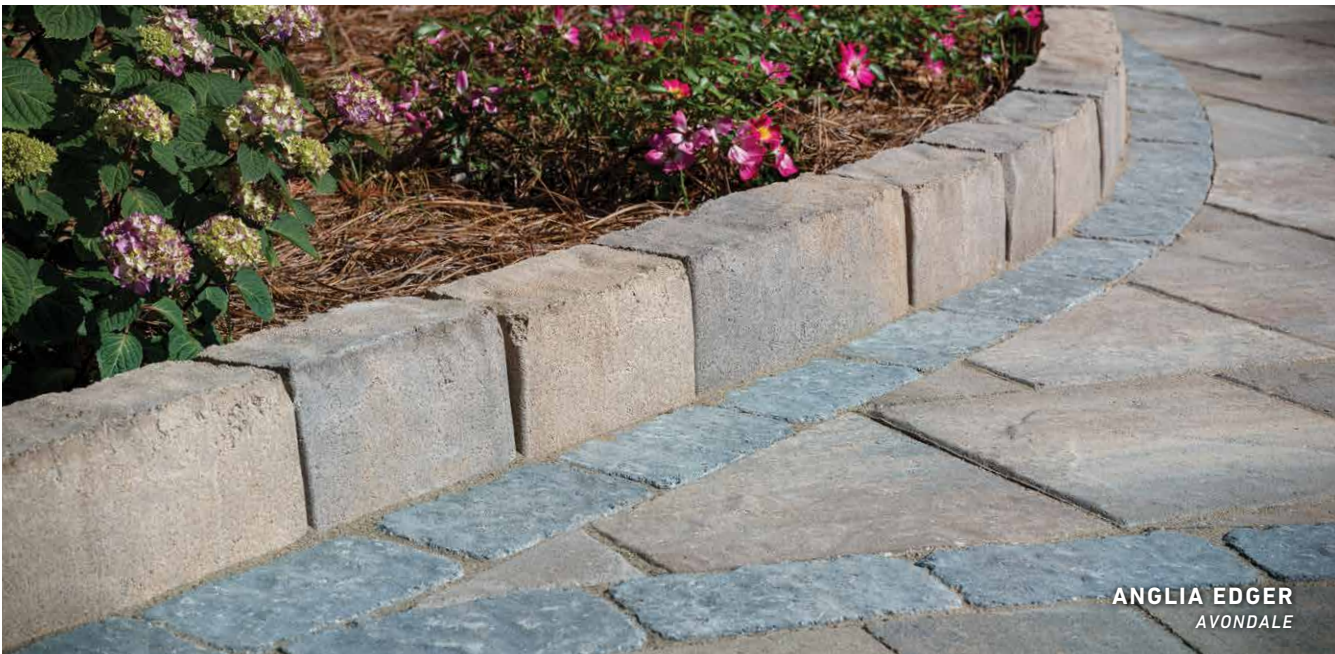

ANGLIA EDGER
AVONDALE

Eastwood Coping




Aspen



Avondale



Graphite

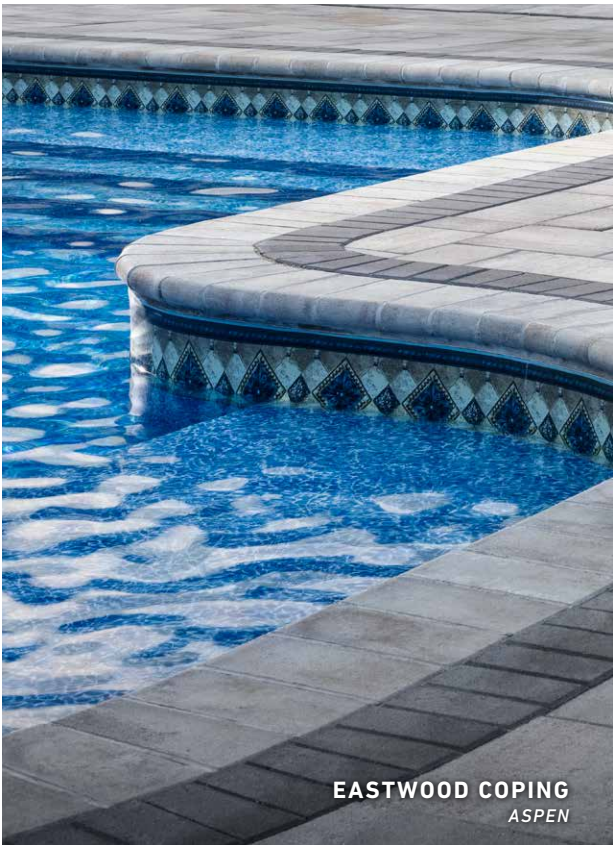

EASTWOOD COPING
ASPEN

Landings Step Unit



Blue Stone



Moonlight



Desert Tan



LANDINGS STEP UNIT
BLUE STONE

Fountainhead Remodel Coping



Charcoal



Chestnut



MODULINE SERIES
GRAPHITE & FOUNDRY

PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.

GMS LOCATION



Oldcastle APG
A CRH COMPANY

1443 Battle Creek Road
Jonesboro, GA 30236
Ph: 770-478-8817
Toll Free: 800-621-5222

100 Clover Lane
Tyrone, GA 30290
Ph: 678-619-2980

144 Cassville Road
Cartersville, GA 30120
Ph: 770-386-9373

1695 Parallel Street
Montgomery, AL 36104
Ph: 334-832-9030

3166 Lee Street
Pelham, AL 35124
Ph: 205-664-0095

7651 Hawkinsville Rd
Macon, GA 31216
Ph: 478-781-3409



[BELGARDCOMMERCIAL.COM](https://belgardcommercial.com)