

COMMERCIAL

PRODUCT OFFERING

MID-SOUTH

TENNESSEE, KENTUCKY, MISSISSIPPI,
NORTH ALABAMA & SOUTHWEST VIRGINIA



BELGARD
COMMERCIAL

PAVER APPLICATIONS



Pedestrian
Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles
Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles
Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.




Frequent Heavy Vehicles
Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.


Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

PAVER COLORS & FINISHES

Standard Colors



GRAPHITE




FOUNDRY




LINEN*



DESERT*



SUNSET



ALMOND

** Light colored paver has an SRI value of ≥ 29 and/or an SR value of ≥ 0.33*

Regional Colors

Ask your local Belgard Sales Representative for additional available colors.



POTOMAC



FOSSIL BEIGE




ARDENNES




SAVANNAH

Finishes

Manufacturing processes generate various finishes that are distinctive and can create the exact look you desire for your project. All processes are not available in all locations. Check with your local Belgard Sales Representative for more information.



Standard (smooth)
Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Antiqued
Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
									Standard	Ground Face	Sand Blast	Antiqued					
DIMENSIONS™ 3-PIECE SYSTEM																	
   Dimensions 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm					✓		✓				3 mm	120	160	3325
   Dimensions 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm					✓		✓				3 mm	120	120	3516
   Dimensions 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm					✓		✓				3 mm	112.5	50	3516
 Dimensions Accent	60 mm	6" x 9"	60 mm					✓		✓				3 mm	112.5	300	2948
   Dimensions Antiqued 3-Piece	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm										✓	N/A	120	160	3325
 Dimensions 6 Antiqued	60 mm	6" x 9"	60 mm										✓	N/A	112		3240
DIMENSIONS™ SINGLE PIECE																	
 Dimensions 3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm			✓		✓		✓		3 mm	110 (60 mm) 88 (80 mm) 60 (101 mm)	440 (60 mm) 352 (80 mm) 264 (101.6 mm)	2,915 (60 mm) 3,168 (80 mm) 2,858 (101.6 mm)
 Dimensions 6" x 6"	60 mm 80 mm	6" x 6"	60 mm	80 mm	80 mm			✓		✓		✓	✓	3 mm	120 (60 mm) 96 (80 mm)	480 (60 mm) 384 (80 mm)	3,288 (60 mm) 3,456 (80 mm)
 Dimensions 6" x 12"	60 mm 80 mm	6" x 12"	60 mm	80 mm				✓		✓		✓		3 mm	120 (60 mm) 96 (80 mm)	240 (60 mm) 192 (80 mm)	3,240 (60 mm) 3,456 (80 mm)
 Dimensions 12" x 12"	60 mm 80 mm	12" x 12"	60 mm	80 mm				✓		✓		✓		3 mm	120 (60 mm) 96 (80 mm)	120 (60 mm) 96 (80 mm)	3,288 (60 mm) 3,456 (80 mm)
 Dimensions 4" x 18"	80 mm	4" x 18"	80 mm					✓		✓			✓	3 mm	72	144	2,592
 Dimensions 4" x 24"	80 mm	4" x 24"	80 mm					✓		✓			✓	3 mm	96	144	3,667

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.

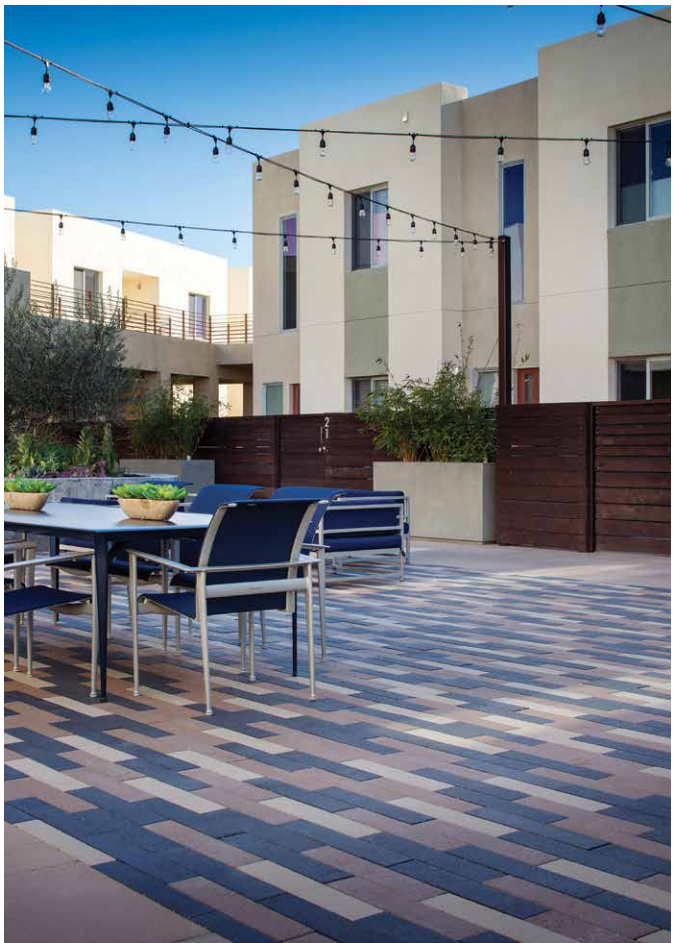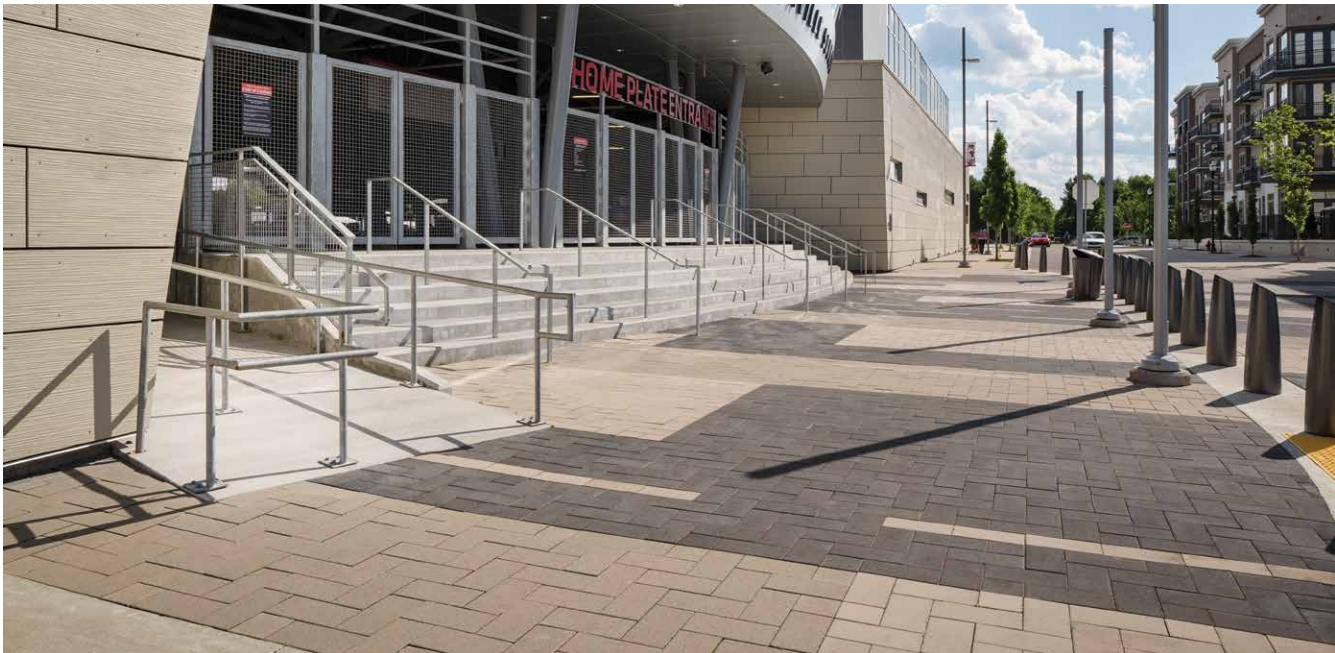




PICTURED ON SPREAD: **DIMENSIONS SERIES**

VEHICULAR & ARCHITECTURAL PAVERS														
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES				CHAMFER WIDTH	
									Standard	Antiqued	Natural	Sand Blast		
 Cambridge Cobble® 3-Piece	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓				rounded
 Cambridge Cobble® Rectangle	60 mm	6" x 9"	60 mm							✓				rounded
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	✓			✓	✓			7 mm
 Mega-Arbel® Patio Slab	60 mm	15¾" x 21"	60 mm									✓		N/A
 Mega-Lafitt™ 3-Piece	80 mm	5½" x 10½" 10½" x 10½" 10½" x 15¾"	80 mm									✓		N/A
 Mega-Stone	80 mm	4 ¾" x 9⅞"	80 mm	80 mm	80 mm					✓	✓			N/A
 Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm									✓		3 mm
 Origins™ 12	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm									✓		3 mm
 Origins™ 18	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm									✓		3 mm
 Origins™ Accent	60 mm	6" x 9"	60 mm									✓		3 mm
 Urbana® 3-Piece	80 mm	4" x 8" 8" x 8" 8" x 12"	80 mm					✓				✓		N/A





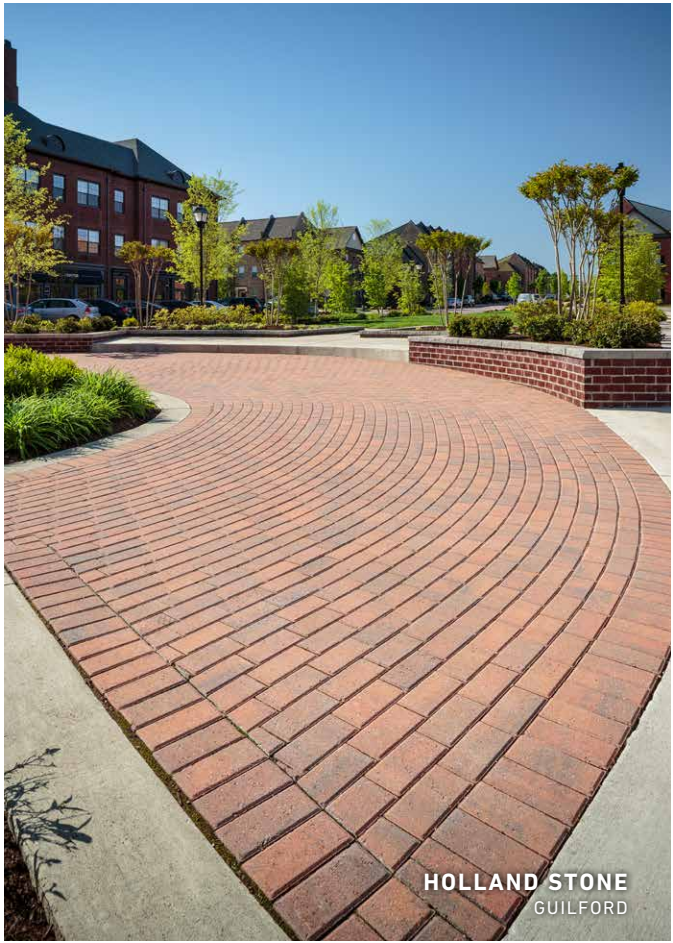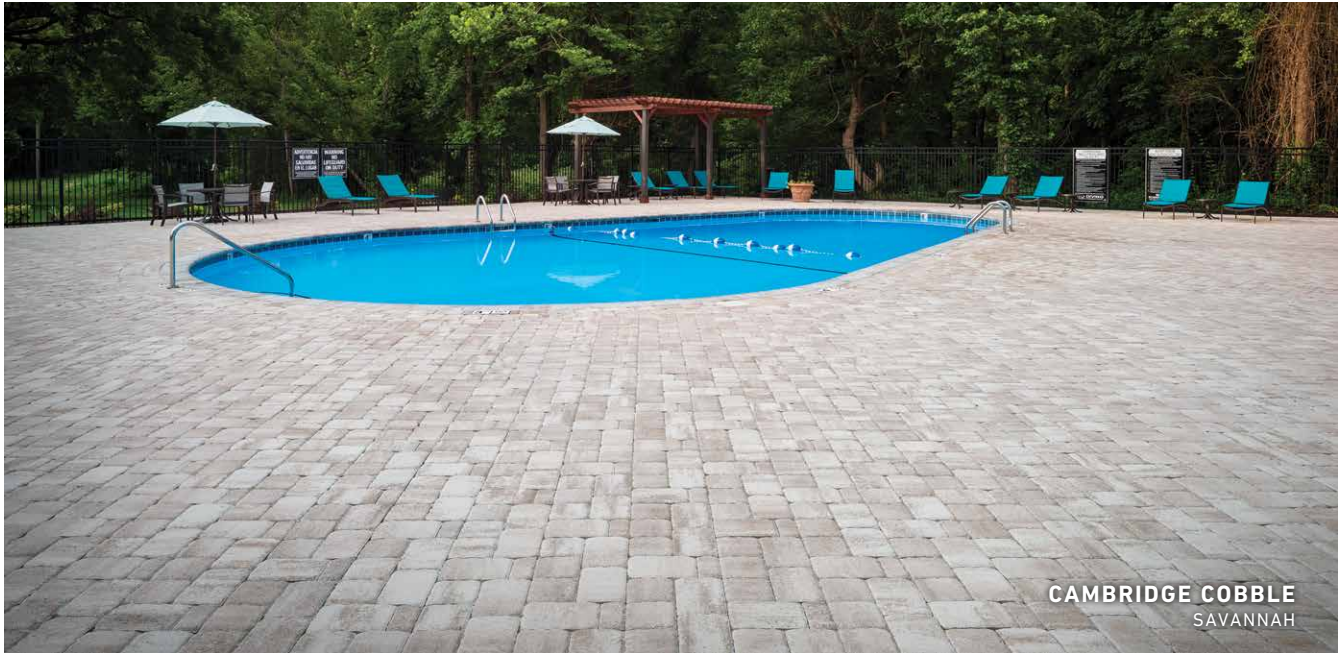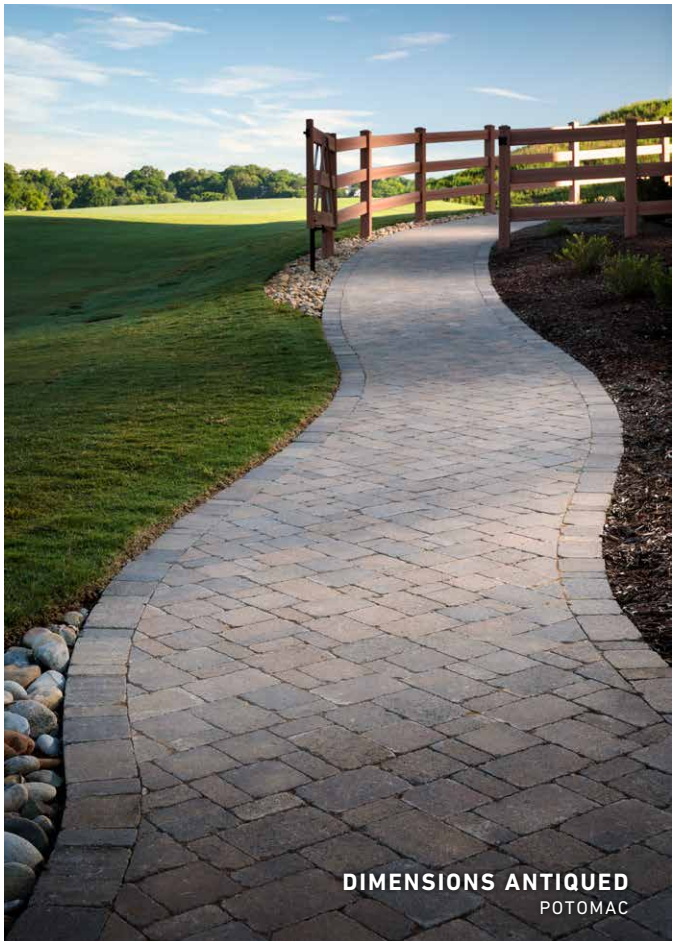


* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



PERMEABLE PAVERS														
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	
									Standard	Antiqued				
AQUALINE™ SERIES														
 Aqualine 3" x 12"	80 mm	3" x 12"	80 mm	80 mm				✓		✓		7 mm	10%	3 mm
 Aqualine 4½" x 9"	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm		✓	✓	✓		10 mm	10%	3 mm
 Aqualine 6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm			✓		✓		7 mm	7%	3 mm
 Aqualine 6" x 12"	80 mm	6" x 12"	80 mm	80 mm				✓		✓		7 mm	5%	3 mm
 Aqualine 9" L-Stone	80 mm	9" x 9"	80 mm	80 mm	80 mm	80 mm		✓	✓	✓		7 mm	7%	3 mm
 Aqualine 12" x 12"	80 mm	12" x 12"	80 mm	80 mm				✓		✓		7 mm	3%	3 mm
 Aqualine Ashlar 3-pc	80 mm	4½" x 4½" 4½" x 9" 9" x 9"	80 mm	80 mm	80 mm	80 mm		✓	✓	✓		10 mm	12%	3 mm
ADDITIONAL PRODUCT LINES														
 Aqua-Bric® Type I	80 mm	4⅞" x 9⅞"	80 mm	80 mm	80 mm			✓		✓		5 mm	9%	3 mm
 Aqua-Bric® Type 4	80 mm	4⅞" x 9⅞"	80 mm	80 mm	80 mm			✓	✓	✓		5 mm	9%	3 mm
 Belgian Cobble®	60 mm	Various	60 mm								✓	N/A	N/A	N/A

CONCRETE GRID PAVEMENTS												
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECHANICAL INSTALL	FINISHES		% SURFACE OPENING	SQ. FT. PER PALLET
									Standard	Antiqued		
 Turfstone™	80 mm	15¾" x 23¾"	80 mm						✓		40%	101


* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.




AQUALINE
SAVANNAH

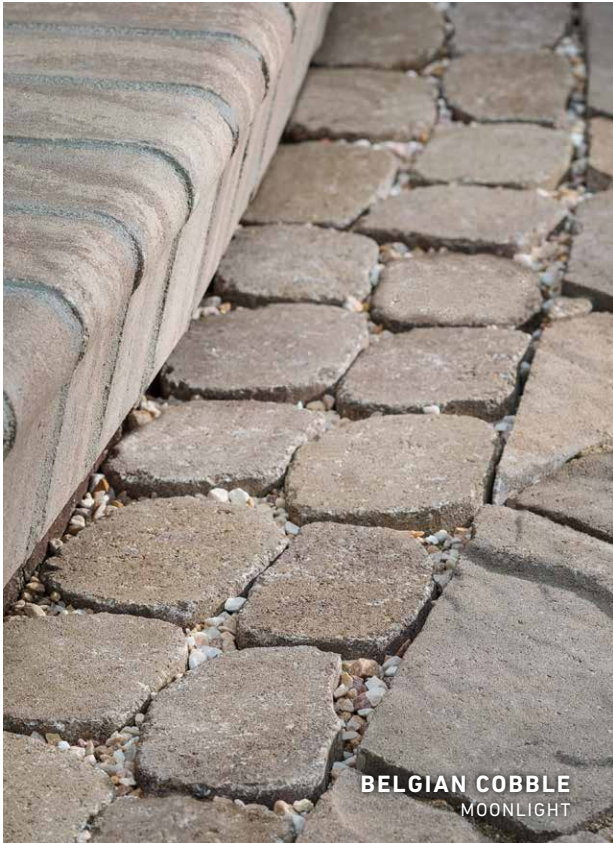

BELGIAN COBBLE
MOONLIGHT



AQUALINE
SAVANNAH

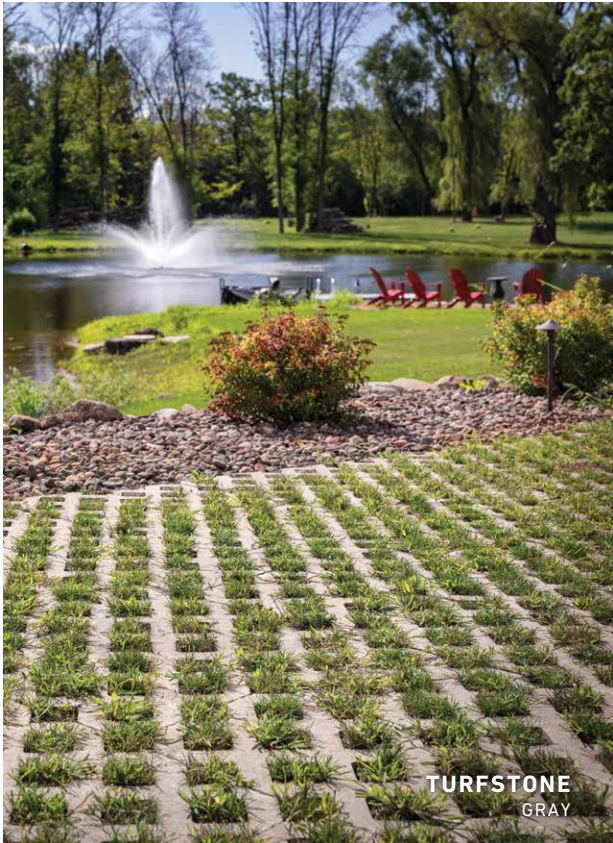


TURFSTONE
GRAY



AQUALINE
ARDENNES



AQUA BRIC & MEGA-STONE
POTOMAC

PORCELAIN PAVERS								
UNITS	THICKNESS	SIZE	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
								
 Foundation	3/4"	12" x 24"	✓	✓	303.6	–	2807	
 Foundation	3/4"	24" x 24"	✓	✓	275.04	–	2533.8	
 Genoa	3/4"	24" x 24"	✓	✓	275.04	–	2533.8	
 Noon	3/4"	12" x 48"	✓	✓	279	40	1,480	



PORCELAIN PAVER AVAILABLE COLORS

Foundation



Amber Beige



Scandina Gray

Genoa



Blanco



Crema

Noon



Daylight
NN 01 NAT – V4








Ember
NN 02 NAT – V4



Honey
NN 03 NAT – V4

SEGMENTAL RETAINING WALLS (SRW)																
UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES				BATTER/ SETBACK	
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Beveled	Virtual Joint	Stone Cut		
 AB® Classic	8"	18"	12"	Raised Front Lip		✓			✓		✓				6°	
 Ashlar Tandem™	7"	13⅓", 15⅓", 18"	3"		Polypropylene Connectors			✓							0/4°	
 Belair Wall® 2.0 Freestanding Wall	6"	6", 10", 16"	5"			✓		✓						✓	Vertical	
 Belair Wall® 2.0 Retaining Wall	6"	6", 10", 16"	8"	Rear Lip		✓		✓						✓	9.5°; 1" Per Course	
 Castlemanor® Grana	6"	6", 12", 16" (long side dimension)	10"		Fiberglass Pins					✓					0° and 9.5°	
 Castlemanor® Rustic	6"	6", 12", 16" (long side dimension)	10"		Fiberglass Pins					✓					0° and 9.5°	
 Highland Stone®	6"	17¾"	9"	Rear Lip					✓					✓	10.6°	
 Melville Tandem™	7"	13⅓", 15⅓", 18"	3"		Polypropylene Connectors						✓				0/4°	
 Melville™ Wall	4"	20"	10"								✓				Vertical	
 Mega Tandem™ 3-in-1 Wall System	12"	24"	3"		41", 22" & 7" Polypropylene Connectors			✓						✓	2.4°	
 Weston Stone™	4"	8", 12" (long side dimension)	8"							✓					Vertical	
 Weston Stone™ Universal	4"	12"	8"							✓					Vertical	

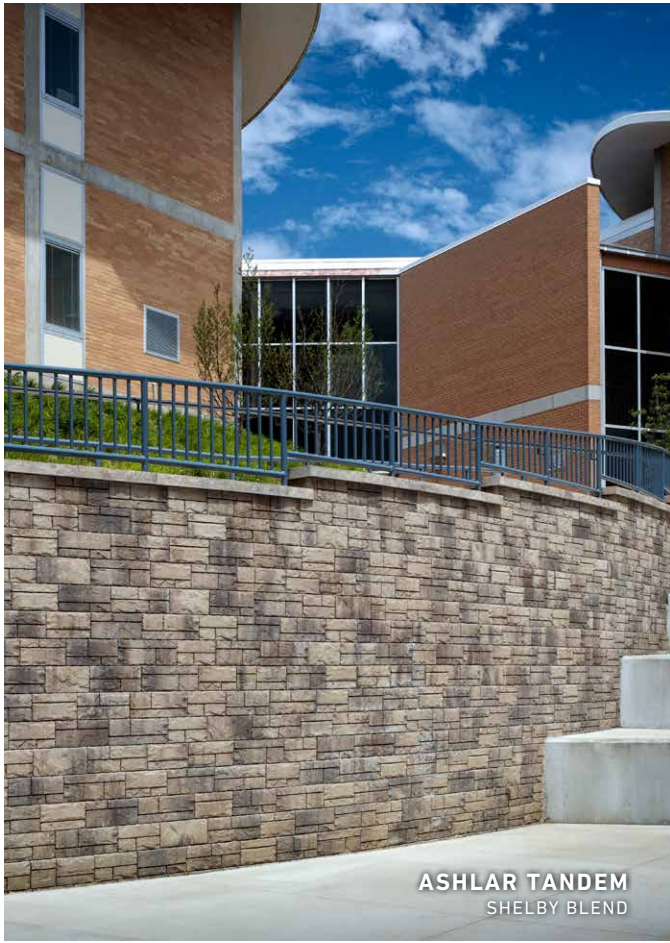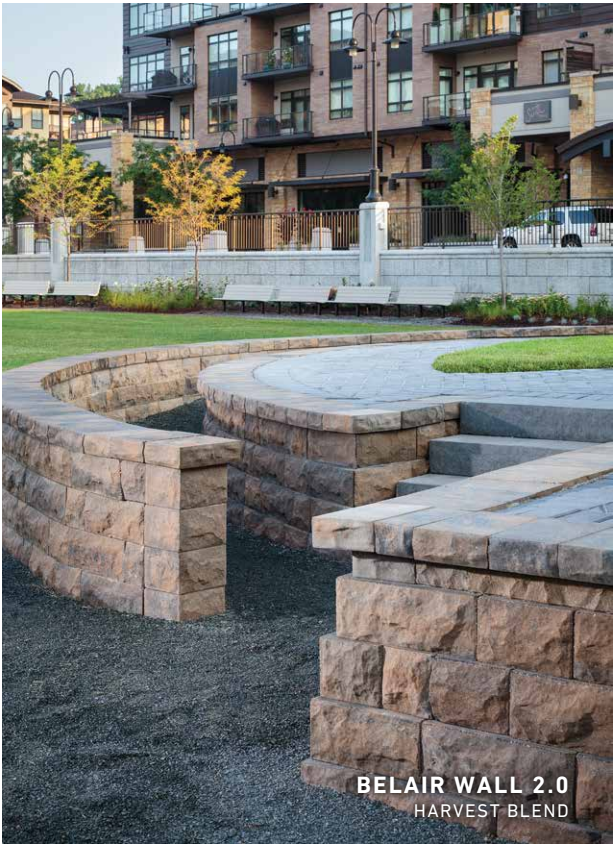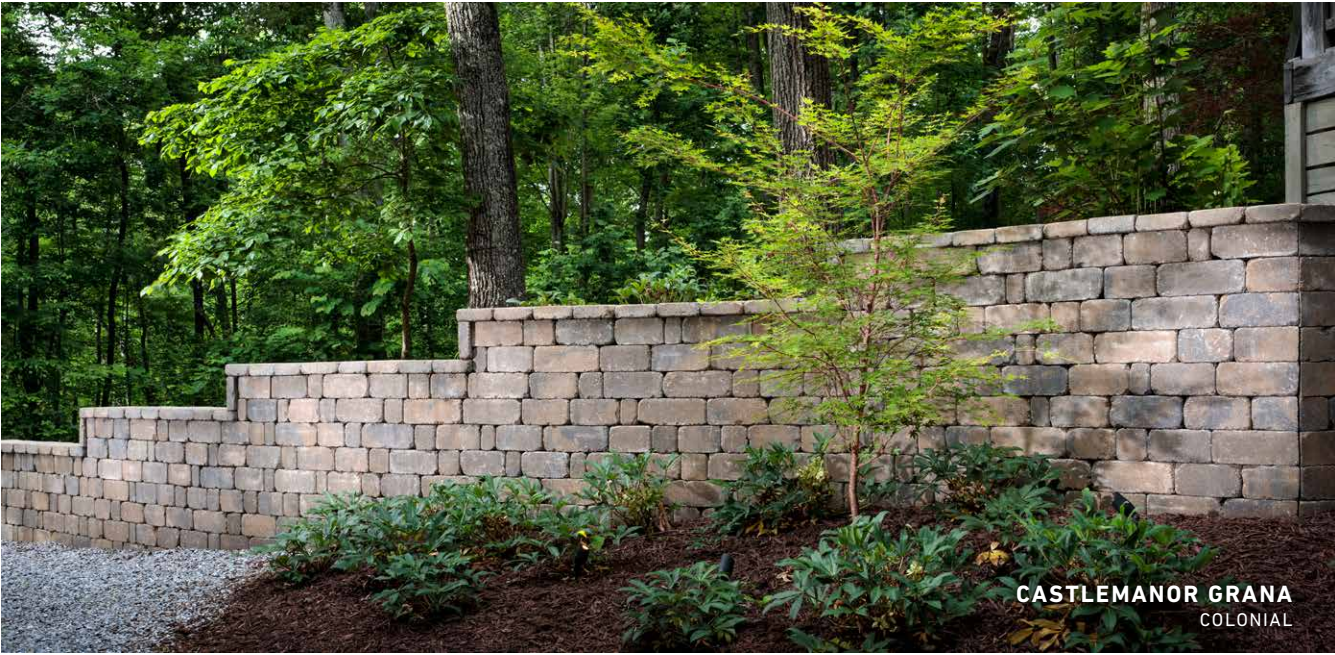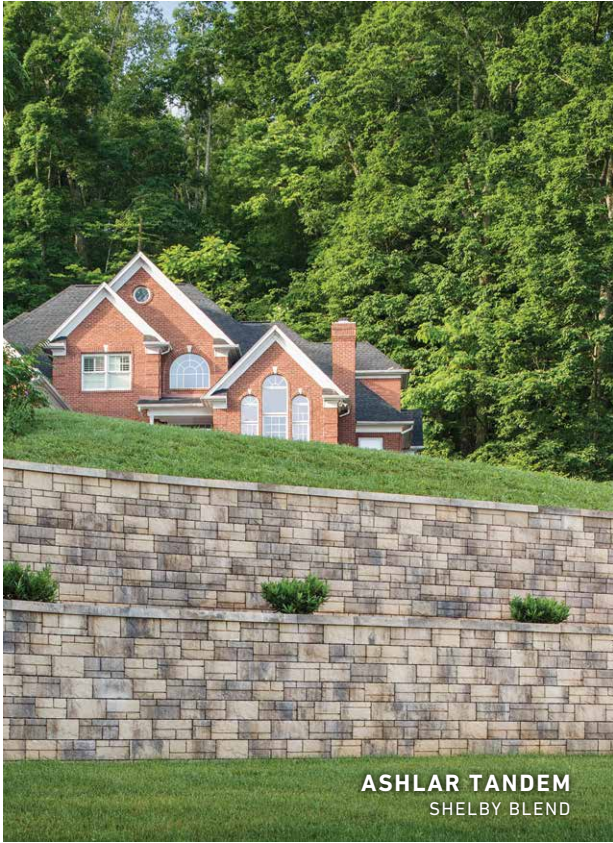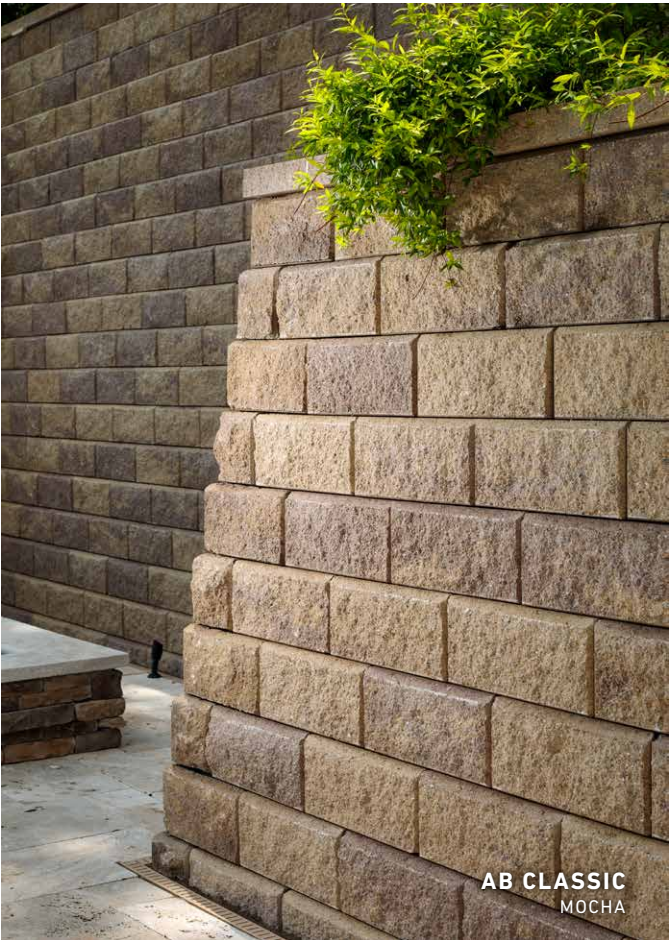

OUTDOOR KITCHENS & FIRE FEATURES

BEAUFORT SERIES

The newest addition to the Belgard fire feature line, the Beaufort series utilizes the natural texture of Agilina™ Plank for an upscale, modern look. Also adding the new Linear Fireplace to complete the collection.



WESTON STONE™ FIRE PIT KIT

Belgard's Weston Stone Universal Fire Pit Kit installs quickly and offers the clean and contemporary look of tumbled stone. The kit is available in three popular color blends developed to complement most Belgard® paving stone and retaining wall types.



BORDEAUX™ SERIES

A timeless stackstone design that allows the fireplace, the grill island, or the brick oven to become the focal point of your outdoor space.



BRISTOL™ SERIES

A beautiful combination of tumbled block with Arbel® and Urbana® accents, Bristol's rustic look blends well with virtually any landscape.



BRIGHTON™ SERIES

Addresses the need and request for a lower-priced fireplace set. Featuring the same 36" firebox as the Bristol Series, plus a built-in hearth, Brighton is a beautiful option for those on a budget.



TANDEM® MODULAR GRID

Easy to install. Versatile. Modular. Simply create your project frame, attach the grid to your structure and clip your Tandem veneers to the grid. Can be used in various applications from deck skirting to outdoor kitchens.

PLEASE NOTE:
Fireplace is wood burning only. Gas log sets and components need to be purchased and installed separately.
Grill island includes stainless grill and door set. Grill is available in propane or natural gas. Must be specified when placing order.
All our Fireplaces and Fire Pits come standard as wood-burning units. However, our fireplaces and fire pits can be retro-fitted for gas burning log sets and burners. Our brick ovens are wood burning units only. Please contact us for more details 877-235-4273. Also, be sure to check with your local municipality for any codes that may affect your installation.





PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.

BELGARD MID-SOUTH LOCATIONS



Oldcastle APG
A CRH COMPANY

CLARKSVILLE
4235 Gutherie Hwy
Clarksville, TN 37040
Ph: 866-694-5326

ROCKWOOD
600 Cardiff Valley Road
Rockwood, TN 37854
Ph: 888-624-3088

HOLLAND STONE
LOW COUNTRY



[BELGARDCOMMERCIAL.COM](https://www.belgardcommercial.com)