

COMMERCIAL

# PRODUCT OFFERING

TEXAS



BELGARD  
COMMERCIAL



# PAVER APPLICATIONS



**Pedestrian**  
Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



**Light Vehicles**  
Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



**Occasional Heavy Vehicles**  
Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



**Frequent Heavy Vehicles**  
Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

*Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.*

# PAVER FINISHES


## Finishes



**Smooth**  
Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



**Tumbled**  
Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



**Ground Face**  
The top of the paving units are ground smooth which exposes the aggregate colors and pigmented background.



**Slate**  
Units are molded to form a surface that emulates natural stone with a sculpted, textured finish.

## TrueColor™

Belgard's exclusive premium surface level color-enhancing protectant. TrueColor enhances the original color depth of Belgard pavers and extends color fastness and durability over time. TrueColor is not a sealer, and does not create a glossy or wet look. It enhances the original color of the paver without losing the surface texture of real stone.



LASTING  
TEXTURE



RESISTS  
STAINS



WITHSTANDS  
FADING



To find out more about TrueColor, ask your contractor or your Belgard Dealer.

DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS



UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET	
									Smooth	Ground Face	Slate	Tumbled	TrueColor			
3-PIECE SYSTEM																
 <b>Dimensions 6</b>	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓				✓	3 mm	105
 <b>Dimensions 12</b>	60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm							✓				✓	3 mm	120
 <b>Dimensions 18</b>	60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm							✓				✓	3 mm	112.5
SINGLE PIECE																
 <b>3" x 9"</b>	60mm 80 mm	3" x 9"	60mm 80 mm	80 mm	80 mm	80 mm	✓	Check with your local Belgard Sales Rep.	✓	✓				✓	3 mm	90
 <b>3" x 12"</b>	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm		✓		✓	✓		✓	✓	3 mm	110 (60 mm) 88 (80 mm) 66 (101.6 mm)	
 <b>3" x 18"</b>	101.6 mm	3" x 18"	101.6 mm				✓		✓	✓			✓	3 mm	49.5	
 <b>3" x 24"</b>	101.6 mm	3" x 24"	101.6 mm				✓		✓	✓			✓	3 mm	66	
 <b>3" x 30"</b>	101.6 mm	3" x 30"	101.6 mm				✓		✓	✓			✓	3 mm	41.25	
 <b>6" x 6"</b>	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	80 mm 101.6 mm		✓		✓	✓		✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	
 <b>6" x 9"</b>	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm	✓		✓	✓		✓	✓	3 mm	112.5 (60 mm) 90 (80 mm)	
 <b>6" x 12"</b>	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm	✓		✓	✓	✓	✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	
 <b>6" x 24"</b>	101.6 mm	6" x 24"	101.6 mm				✓		✓	✓			✓	3 mm	60	
 <b>6" x 36"</b>	101.6 mm	6" x 36"	101.6 mm				✓		✓	✓			✓	3 mm	45	
 <b>6" x 48"</b>	101.6 mm	6" x 48"	101.6 mm				✓		✓	✓			✓	3 mm	60	
 <b>12" x 12"</b>	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm		✓		✓	✓		✓	✓	3 mm	120 (60 mm) 96 (80 mm) 72 (101.6 mm)	
 <b>12" x 18"</b>	60 mm	12" x 18"	60 mm				✓		✓	✓			✓	3 mm	120	
 <b>12" x 24"</b>	60 mm	12" x 24"	60 mm				✓		✓	✓			✓	3 mm	120	
 <b>18" x 18"</b>	60 mm	18" x 18"	60 mm				✓		✓	✓			✓	3 mm	90	
 <b>18" x 24"</b>	60 mm	18" x 24"	60 mm				✓		✓	✓			✓	3 mm	120	
 <b>24" x 24"</b>	60 mm	24" x 24"	60 mm				✓		✓	✓			✓	3 mm	80	
 <b>24" x 30"</b>	60 mm	24" x 30"	60 mm				✓		✓	✓			✓	3 mm	100	

\* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.







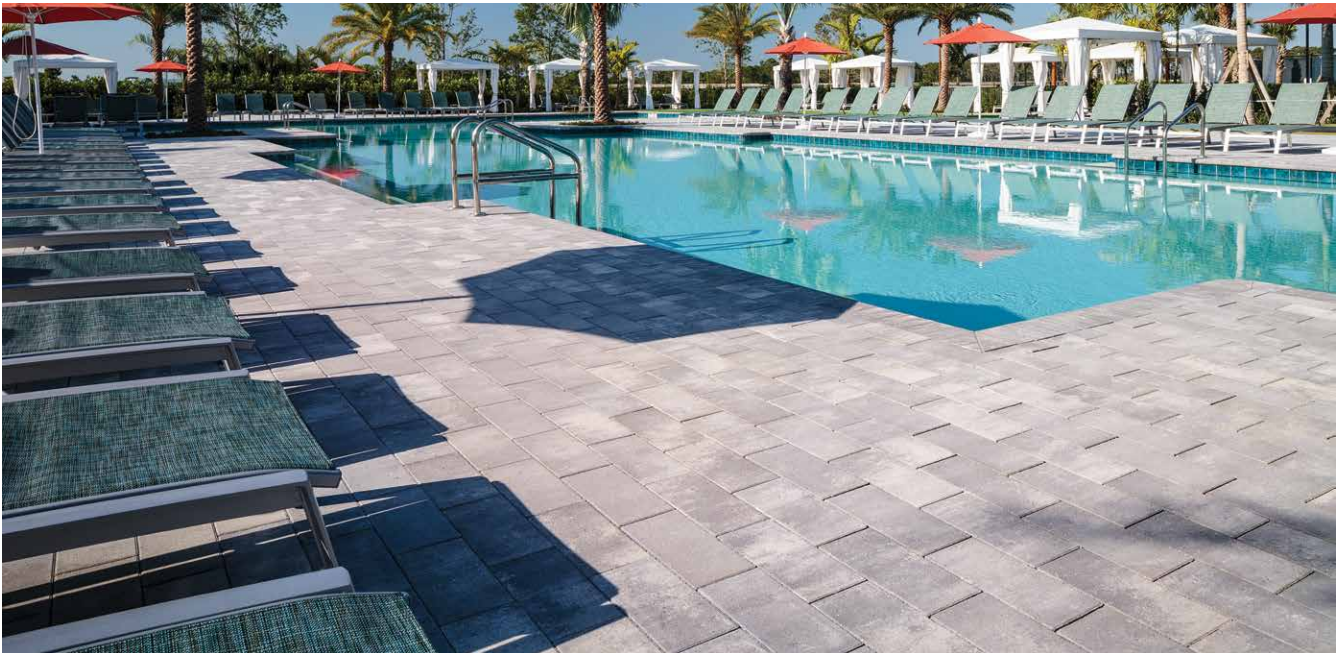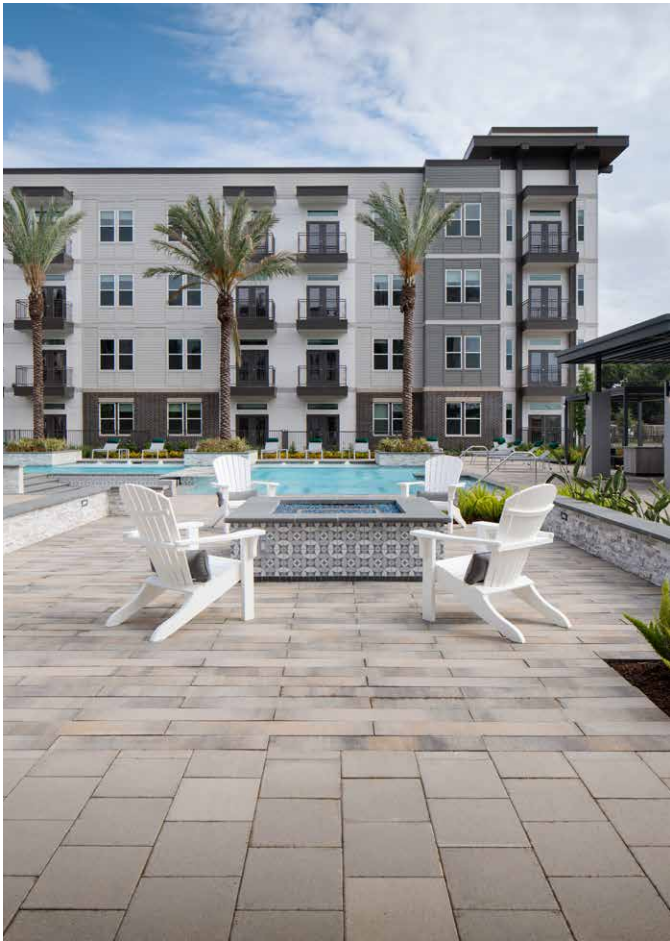




Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.











Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.







MODULINE SERIES® VEHICULAR & ARCHITECTURAL PAVERS																
UNITS		THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET
										Smooth	Ground Face	Slate	Tumbled	TrueColor		
	4" x 12"	80 mm	4" x 12"	80 mm	80mm			✓	Check with your local Belgard Sales Rep.	✓	✓		✓	✓	3 mm	85
	4" x 18"	80 mm	4" x 18"	80 mm				✓		✓	✓			✓	3 mm	72
	4" x 24"	80 mm	4" x 24"	80 mm				✓		✓	✓			✓	3 mm	96
	4" x 30"	80 mm	4" x 30"	80 mm				✓		✓	✓			✓	3 mm	53.33
	6" Bishop Hat	60 mm 80 mm 101.6 mm	6" Bishop Hat	60 mm	80 mm	80 mm	80 mm 101.6 mm	✓		✓	✓			✓	3 mm	84.5 (60 mm) 67.6 (80 mm) 50.7 (101.6 mm)

NEW GEOMETRIC SHAPES																
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET	
									Smooth	Ground Face	Slate	Tumbled	TrueColor			
 Diamond	60 mm	12" x 12"	60 mm				✓		✓					✓	3 mm	93.53
 12" Parallelogram (60° angle)	60 mm	3" x 12"	60 mm				✓		✓					✓	3 mm	85.73
 18" Parallelogram (60° angle)	60 mm	6" x 18"	60 mm				✓		✓					✓	3 mm	114.31
 Hexagon	60 mm	12" x 12"	60 mm				✓		✓					✓	3 mm	100

\* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.


Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.  
 Note: The Moduline & Dimensions Series is all made to order. Lead times will apply. Check with your local Belgard representative for applicable lead times.

VEHICULAR & ARCHITECTURAL PAVERS																		
UNITS				THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					CHAMFER WIDTH	SQ. FT. PER PALLET
												Smooth	Ground Face	Slate	Tumbled	TrueColor		
  	Bergerac® (3 pc)			60 mm	3 9⁄16" x 7 1⁄16" 7 1⁄16" x 7 1⁄16" 7 1⁄16" x 10 5⁄8"	60 mm								✓		N/A	113.3	
  	Cambridge Cobble® (3 pc)			60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						✓			✓		Round Chamfer	120
  	Dublin Cobble® (3 pc)			60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm						✓	✓		✓		Varies Between 2-5 mm	127.9
		Holland Stone		60 mm / 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	✓		✓	✓		✓		7 mm	120 (60 mm) 96 (80 mm)
		Mega-Arbel®		60 mm	15 3⁄8" x 21"	60 mm								✓			N/A	103.4
  	Mega-Bergerac® (3 pc)			80 mm	4 3⁄4" x 9 7⁄16" 9 7⁄16" x 9 7⁄16" 9 7⁄16" x 14 3⁄16"	80 mm									✓		N/A	97.65
  	Melville™ Plank Small (3 pc)			60 mm	5" x 11 1⁄16" 5" x 15 3⁄4" 5" x 19 1⁄16"	60 mm				✓		✓				✓	3 mm	114.53
  	Melville™ Plank Large (3 pc)			60 mm	7 1⁄2" x 11 3⁄16" 7 1⁄2" x 15 3⁄4" 7 1⁄2" x 19 1⁄16"	60 mm				✓		✓				✓	3 mm	122.71
  	Mega-Lafitt™ (3 pc)			80 mm	5 1⁄4" x 10 1⁄2" 10 1⁄2" x 10 1⁄2" 10 1⁄2" x 15 3⁄4"	80 mm				✓				✓			N/A	92.66
		Mega-Lafitt™ (Lg Square)		80 mm	15 3⁄4" x 15 3⁄4"	80 mm				✓				✓			N/A	93.02
  	Old World Paver™			80 mm	5 1⁄8" x 7 3⁄4" 5 1⁄8" x 10 1⁄4" 5 1⁄8" x 12 1⁄16"	80 mm								✓			N/A	90
  	Origins™ 6			60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓				✓		✓	3 mm	105
  	Origins™ 12			60 mm	12" x 6" 12" x 12" 12" x 18"	60 mm				✓				✓		✓	3 mm	120
  	Origins™ 18			60 mm	18" x 9" 18" x 18" 18" x 27"	60 mm				✓				✓		✓	3 mm	112.5
		Origins™ Accent		60 mm	6" x 9"	60 mm				✓				✓		✓	3 mm	112.50
  	Travertino			30 mm	6" x 6" 6" x 12" 12" x 12"	30 mm				✓				✓			N/A	192
  	Urbana® Stone (3 pc)			60 mm / 80 mm	4" x 8" 8" x 8" 8" x 12"	60 mm	80 mm			✓				✓	✓		N/A	127.9
		Urbana® Stone (Lg Square)		60 mm / 80 mm	12" x 12"	60 mm	80 mm			✓				✓	✓		N/A	127.9

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

\* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.



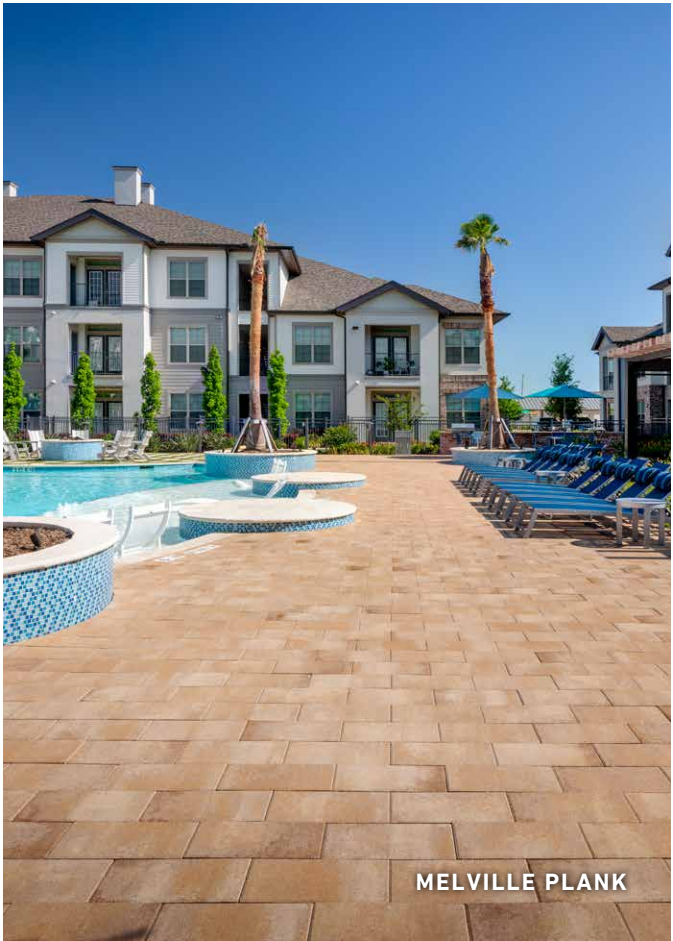

MELVILLE PLANK



ORIGINS 18




MEGA-LAFITT



CAMBRIDGE COBBLE





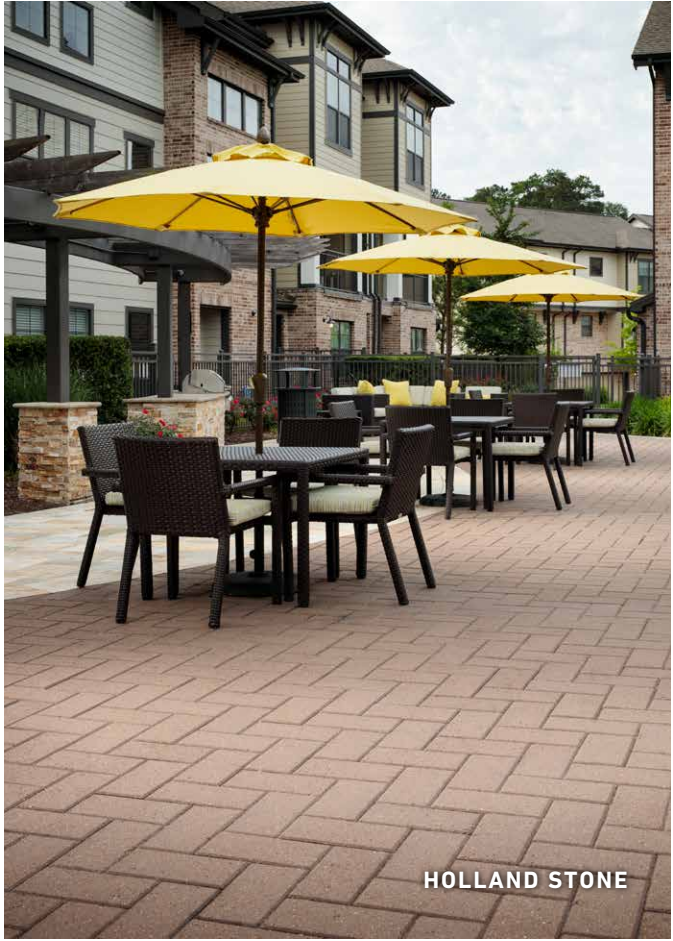




GEOMETRIC SHAPES



HOLLAND STONE



PERMEABLE PAVERS																	
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
									Smooth	Ground Face	Slate	Tumbled	TrueColor				
AQUALINE™ SERIES																	
 3" x 12"	80 mm	3" x 12"	80 mm	80 mm			✓		✓	✓			✓	7 mm	8%	3 mm	88
 6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓		✓	✓			✓	7 mm	5%	3 mm	96
 6" x 12"	80 mm	6" x 12"	80 mm	80 mm			✓		✓	✓			✓	7 mm	5%	3 mm	96
 12" x 12"	80 mm	12" x 12"	80 mm	80 mm			✓		✓	✓			✓	7 mm	3%	3 mm	96
 12" x 12" L-Stone	80 mm	12" x 12" L-Stone	80 mm	80 mm			✓		✓	✓			✓	7 mm	5%	3 mm	96
 Ashlar 3-Piece	80 mm	4½" x 9" 4½" x 4½" 9" x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓	✓			✓	7 mm	5%	3 mm	96
ADDITIONAL PRODUCT LINES																	
 Aqua Roc™	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓	✓			✓	8 mm	9%	3 mm	97.4
 Eco Dublin®	80 mm	6¼" x 3¼" 6¼" x 6¼" 6¼" x 10¼"	80 mm	80 mm			✓		✓	✓		✓	✓	12 mm	7%	N/A	91.6

CONCRETE GRID PAVERS															
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES					% SURFACE OPENING	SQ. FT. PER PALLET
									Smooth	Ground Face	Slate	Tumbled	TrueColor		
 Turfstone™	80 mm	15¾" x 23¾"	80 mm					✓	✓					40%	101

\* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



# PAVER AVAILABLE COLORS


## Solid Colors



## Tumbled Paver Colors *(Tumbling is available for all solid and blended paver colors)*



## Blended Colors

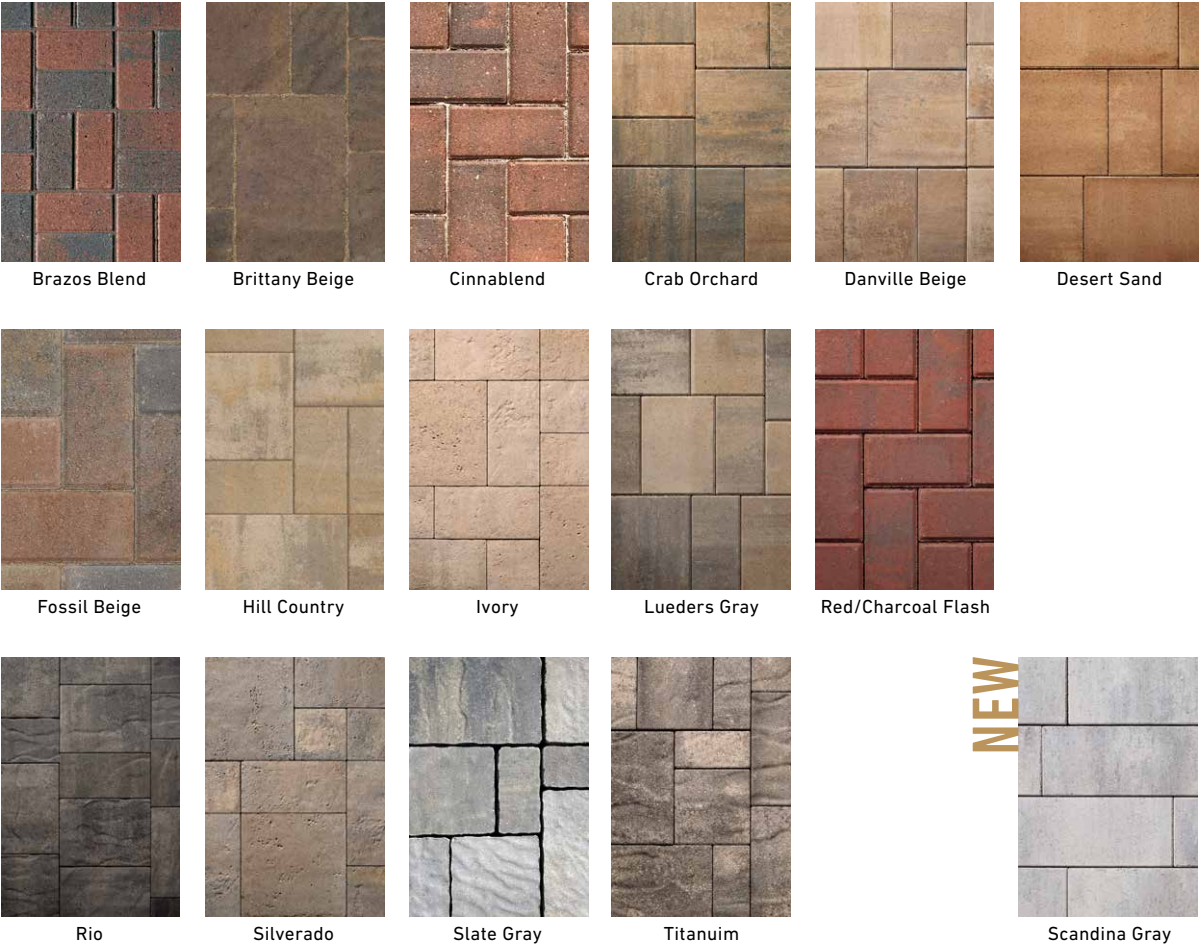

*Note: Belgard® cannot guarantee printed color swatches will match actual product. All colors shown are approximate representations of the standard product. Actual colors may vary slightly due to batch variances and environmental conditions at time of photography. Actual sizes may vary by region. Please contact your local Belgard representative for accurate samples, availability and pricing.*





AQUA ROC




AQUALINE




AQUALINE



ECO DUBLIN

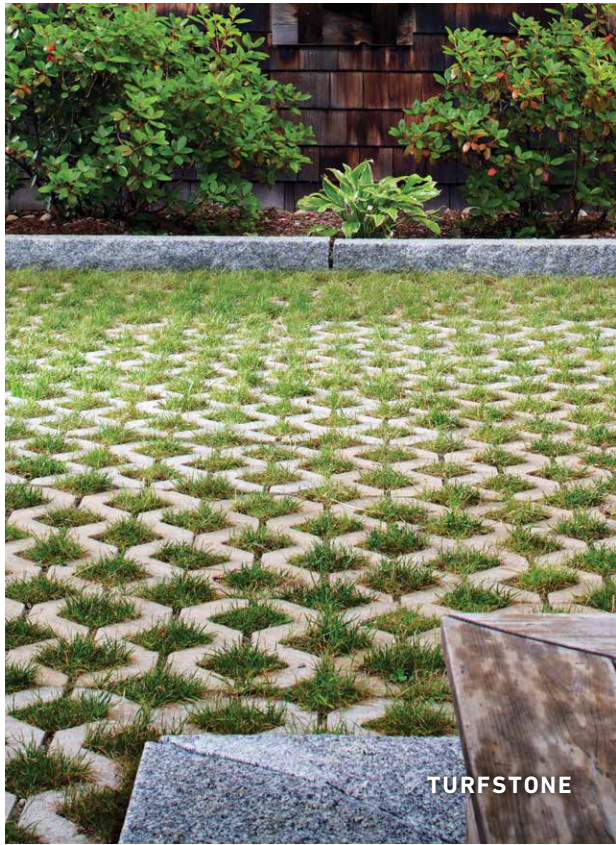


TURFSTONE

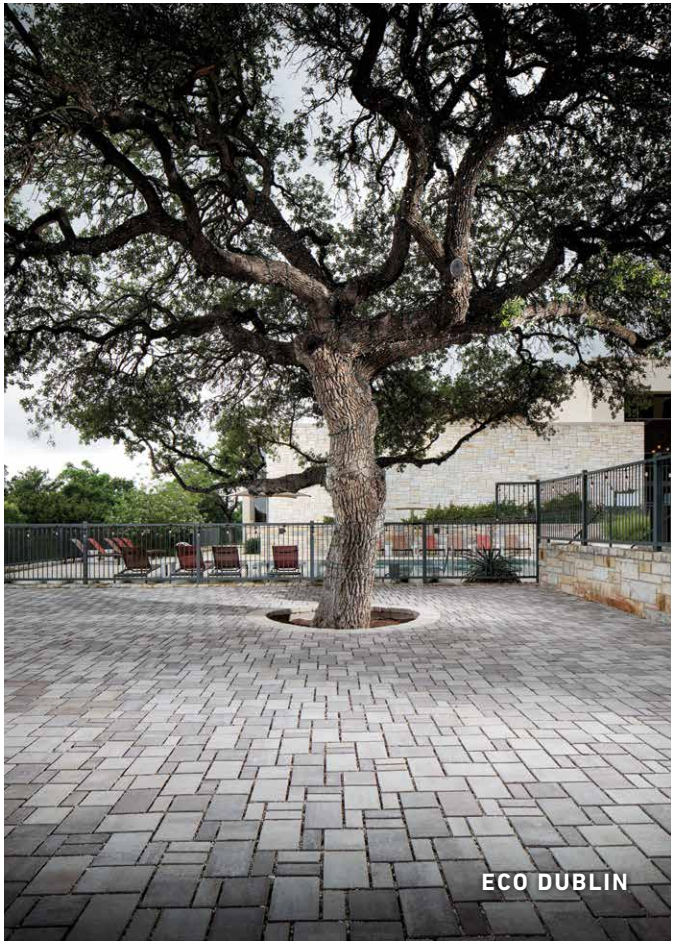


ECO DUBLIN




PORCELAIN PAVERS										
UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
										
 Glocal - 24 x 24	Concrete	¾"	24" x 24"	Clear, Ideal, Type, Classic	✓	✓	232.5	60	2,160	
 Glocal - 24 x 48	Stone	¾"	24" x 48"	Clear, Ideal, Type, Classic	✓	✓	271.25	35	2,160	
 Noon - 8 x 48	Wood	¾"	8" x 48"	Daylight, Ember, Honey	✓		151.8	60	1,415	
 Noon - 12 x 48	Wood	¾"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,664	
 Quarziti 2.0	Stone	¾"	24" x 24"	Glacier, Mountains, Waterfall, River	✓	✓	232.5	60	2,160	
 Quarziti 2.0 Modular	Stone	¾"	12" x 24", 24" x 36"	Mountains, Waterfall	✓	✓	279	72	2,640	
 Quarziti 2.0	Stone	¾"	24" x 48"	Glacier, Mountains, Waterfall, River	✓	✓	271.25	35	2,160	
 Verona™	Stone	¾"	24" x 24"	Blue Stone, Platinum, Taos, Yukon	✓	✓	232.5	60	2,160	
 Unico Coping	Stone	¾"	12.99" x 23.54"	Glacier, Mountains, Waterfall, River	✓		240 LF	120	2080	




**RESISTANT TO FREEZE THAW**  
Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F).




**RESISTANT TO BREAKAGE**  
Because every slab can withstand loads of over 2200 lbs.




**RESISTANT TO CHEMICAL AGGRESSION**  
Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.




**RESISTANT TO STAINS**  
Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.




**EASY TO LAY**  
Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



**EASY TO CLEAN**  
Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.\*



**EASY TO REMOVE**  
Because a 24" x 24" slab weighs just 37 lbs., its light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).





**EASY FOR YOU**  
Because the structured top textures formed on the surface of our pavers create slip resistant surfaces.

*\* It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.*

*If installing on elevated surface over ¾" all porcelain must have a factory applied fiber mesh backing.*




*Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit [Belgard.com/porcelain](https://www.belgard.com/porcelain) for additional installation details.*

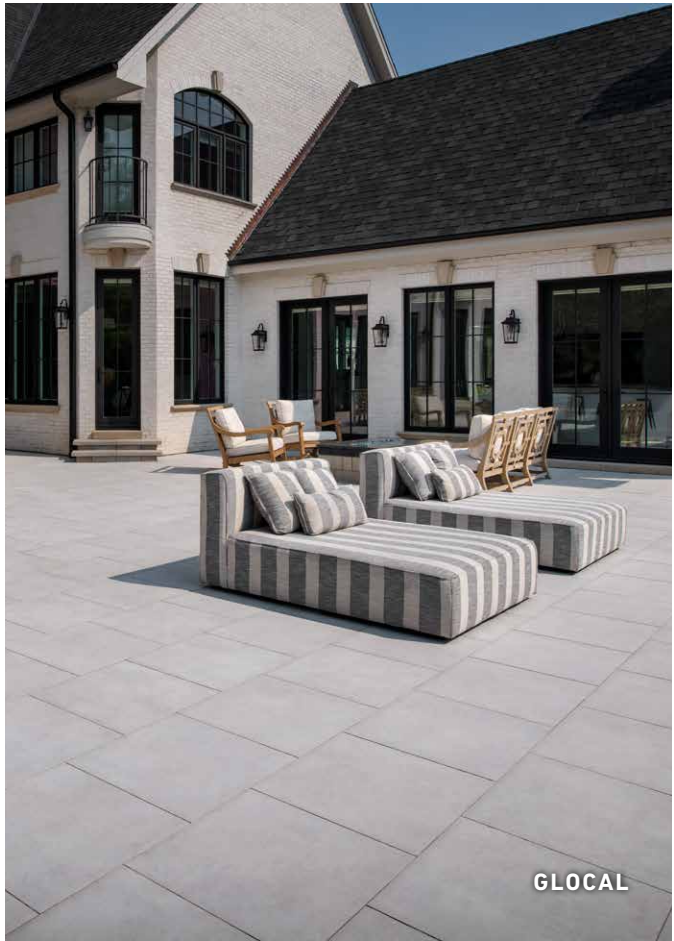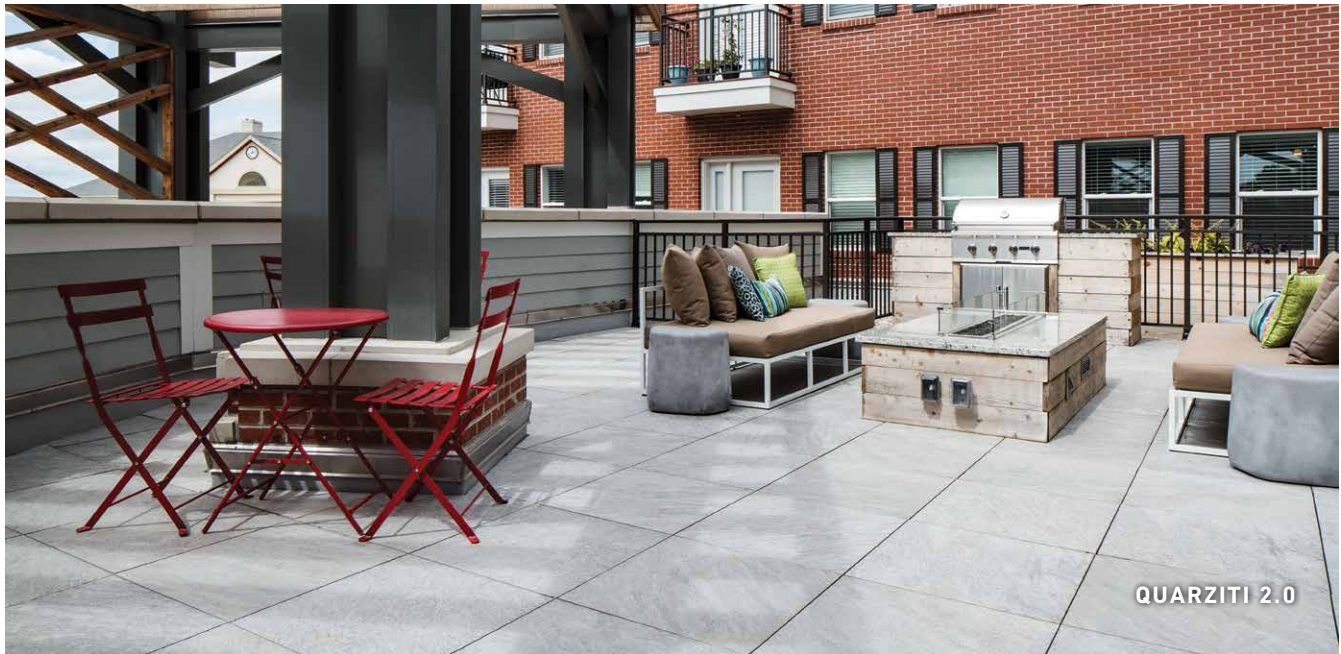







SEGMENTAL RETAINING WALLS (SRW)																	
UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES					BATTER/ SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut		
 AB® Classic	8"	18"	12"	Raised Front Lip					✓		✓					6°	40
 Diamond® 9D Virtual Joint	6"	17¾"	9"	Rear Lip		✓			✓				✓		✓	10.6°	35.5
 Diamond Pro®	8"	18"	12"	Rear Lip		✓			✓		✓	✓				7.1°	36
 Diamond Pro® Smooth	8"	18"	12"	Rear Lip		✓					✓					7.1°	36
 Diamond Pro Stone Cut®	8"	18"	12"	Rear Lip		✓			✓				✓		✓	7.1°	36
 Diamond Pro® PS	8"	18"	12"		Fiberglass Pins	✓			✓		✓	✓	✓	✓	✓	Near Vertical, 7.1°	36
 Diamond Pro® Quarried Face	8"	18"	12"	Rear Lip		✓		✓								7.1°	36
 GeoHold®	8"	18"	11½"	Front Lug		✓			✓		✓					4°	36
 Lafitt Tandem™	7"	13¾" 15⅛" 18⅞"	2⅝"		Polypropylene Connectors			✓								4° retaining, 0° freestanding	70
 Mega Tandem™ 3-in-1 System	12"	24"	3"		41", 22" & 7" Polypropylene Connectors			✓								2.5°	70

FREESTANDING WALLS (FSW)																	
UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES					BATTER/ SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Beveled	Virtual Joint**	Victorian	Stone Cut		
 Melville™ Wall	4"	20"	10"								✓					Vertical	26.67
 Weston Stone™	4"	8", 12", 16"	8"							✓	✓					Vertical	42
 Weston Stone™ Universal	4"	12"	8"							✓	✓					Vertical	112 pieces



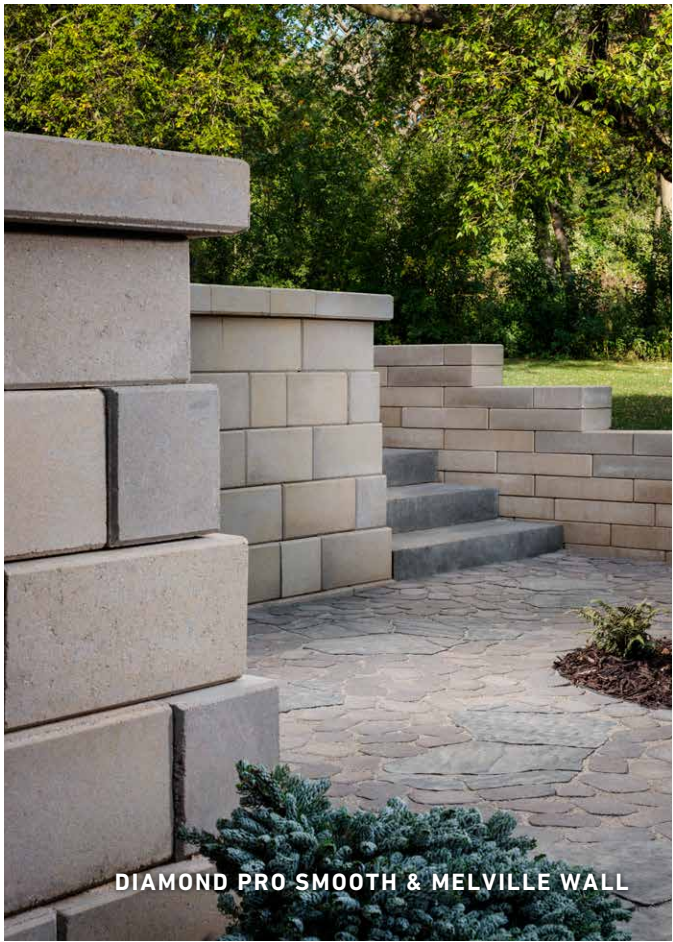

DIAMOND PRO SMOOTH & MELVILLE WALL

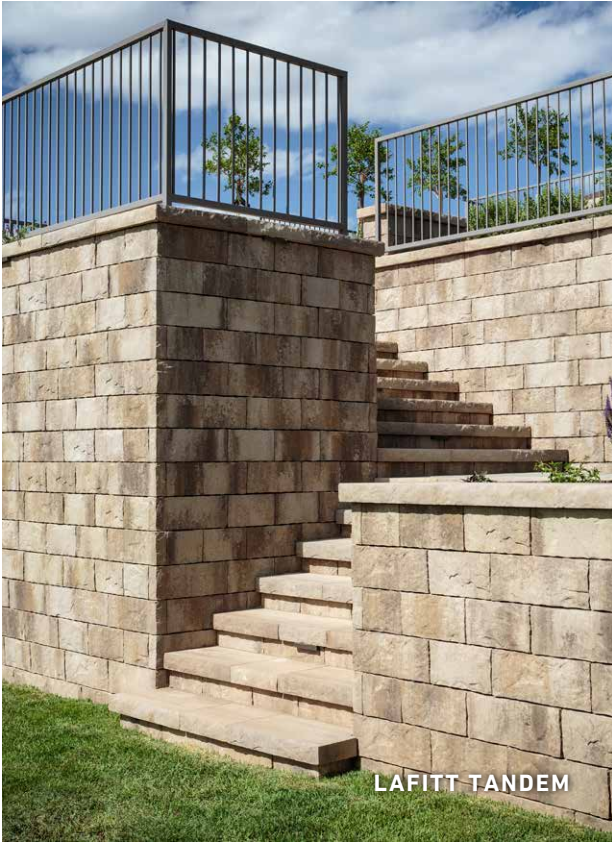

LAFITT TANDEM




DIAMOND PRO BEVELED FACE



DIAMOND PRO VIRTUAL JOINT



MEGA TANDEM

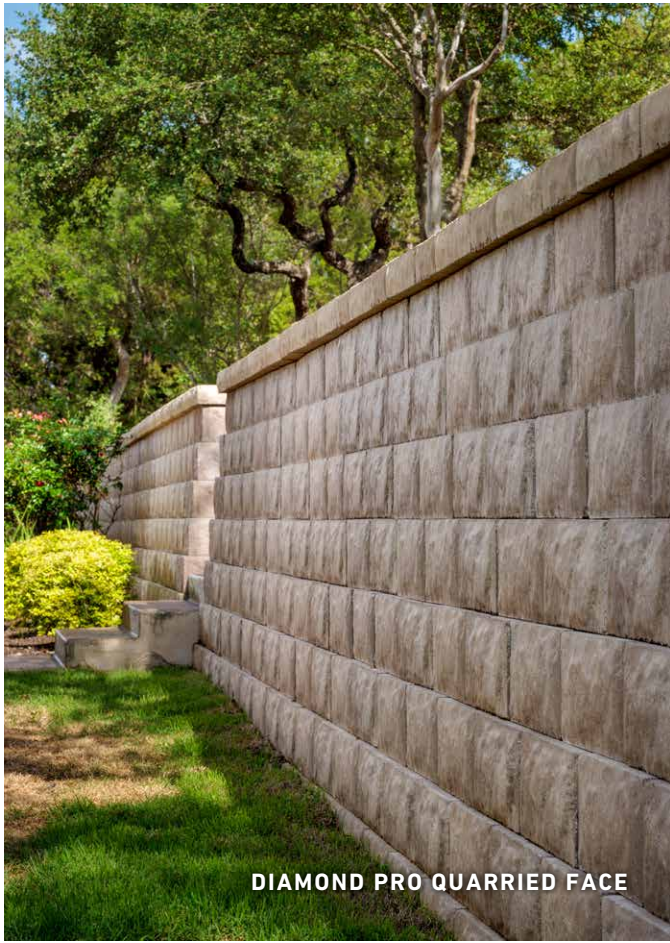

DIAMOND PRO QUARRIED FACE



# WALL AVAILABLE COLORS



Gray



Fossil Beige



Tan



Lueders Gray



Hill Country Blend



Llano Blend



Bayou Blend



Danville Beige



Danville Beige Quarried







Lueders Gray Quarried

AB® FENCING SYSTEM									
UNITS	UNIT SIZE			CONNECTION TYPE		TEXTURE		BATTER/ SETBACK	QTY PER PALLET
	Height	Width	Depth	Block	Other	Striated	Split		
Post Block	8"	18"	12"	✓		✓	✓	Vertical	48
Panel Block	8"	18"	6"	✓		✓	✓	Vertical	72
Cap Block	4"	18"	12"	✓		✓	✓	N/A	48





ACCESSORIES						
UNITS		SIZE	UNITS/ PALLET	LAYER/ PALLET	WEIGHT/ UNIT	WEIGHT/ PALLET (LBS)
	Landings™ Step Unit	6" x 48" x 18"	2	-	462	924
	Anchor™ Column Cap	28" x 28" x 3"	5	5	205	1,025
	Coventina™ Coping	14" x 23½" x 2⅜"	44	11	60	2,642
	Laguna™ Coping	14⅜" x 23⅝" x 2⅜"	40	10	50	2,200
	Marina™ Coping	5 15⁄16" x 11 13⁄16" x 2⅜"	105	5	-	2751
	Unico Porcelain Coping	12.99" x 23.54" x ¾"	120	-	-	2080

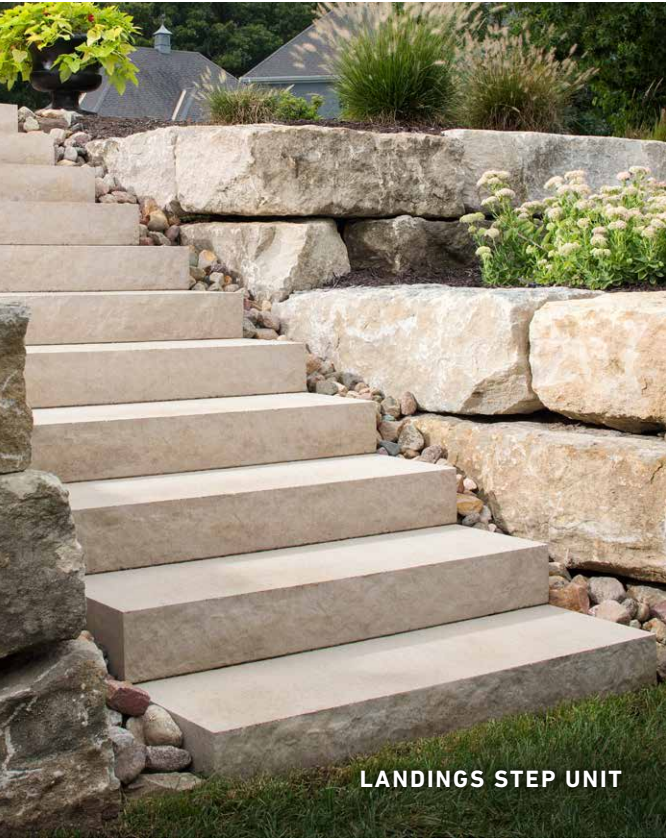

# ACCESSORIES AVAILABLE COLORS

## Landings™ Step Unit



Foundry



Moonlight

## Anchor™ Column Cap



Charcoal



Limestone



Tan

## Coventina™ Coping



Crab Orchard



Danville Beige



Lueders Gray

## Laguna™ Coping



Cognac



Moonstone



Pearl

## Marina™ Coping



Charcoal

ROOFTOP PLAZA PAVERS											
UNITS	THICKNESS	SIZE	MATERIAL	FINISHES				PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
				Smooth	Matte	Shot Blast	Diamond				
Jewell Plaza Slabs	2"	24" x 24"	Concrete	✓				✓	88	22	1,771
Classic Plaza Slabs	2"	24" x 24"	Concrete	✓	✓	✓	✓	✓	Varies per selection. Contact your local Belgard Representative for more information.		
Glocal	¾"	24" x 24"	Porcelain	✓				✓	232.5	60	2,160
Quarziti 2.0	¾"	24" x 24"	Porcelain	✓				✓	232.5	60	2,160

ROOFTOP PAVERS											
UNITS	THICKNESS	SIZE	MATERIAL	FINISHES				PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)
				Smooth	Matte	Shot Blast					
Ballast Pavers	1⅝"	8½" x 16"	Concrete	✓					189	200	2,599

### Jewell Plaza Slabs



Foundry



Graphite




Almond



Jewell has multiple pedestal options to accommodate a variety of site conditions. Please contact your local representative for more information.

Belgard has solutions for high wind applications and paver layout services. Please contact your local representative for more information.

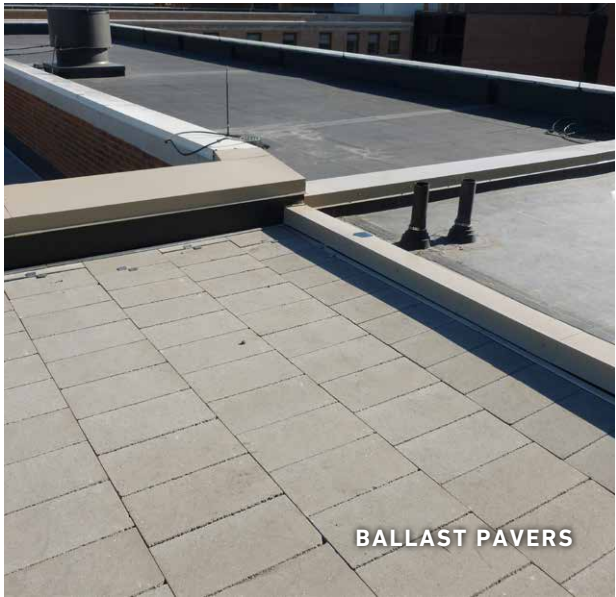


BALLAST PAVERS



JEWELL PLAZA SLABS



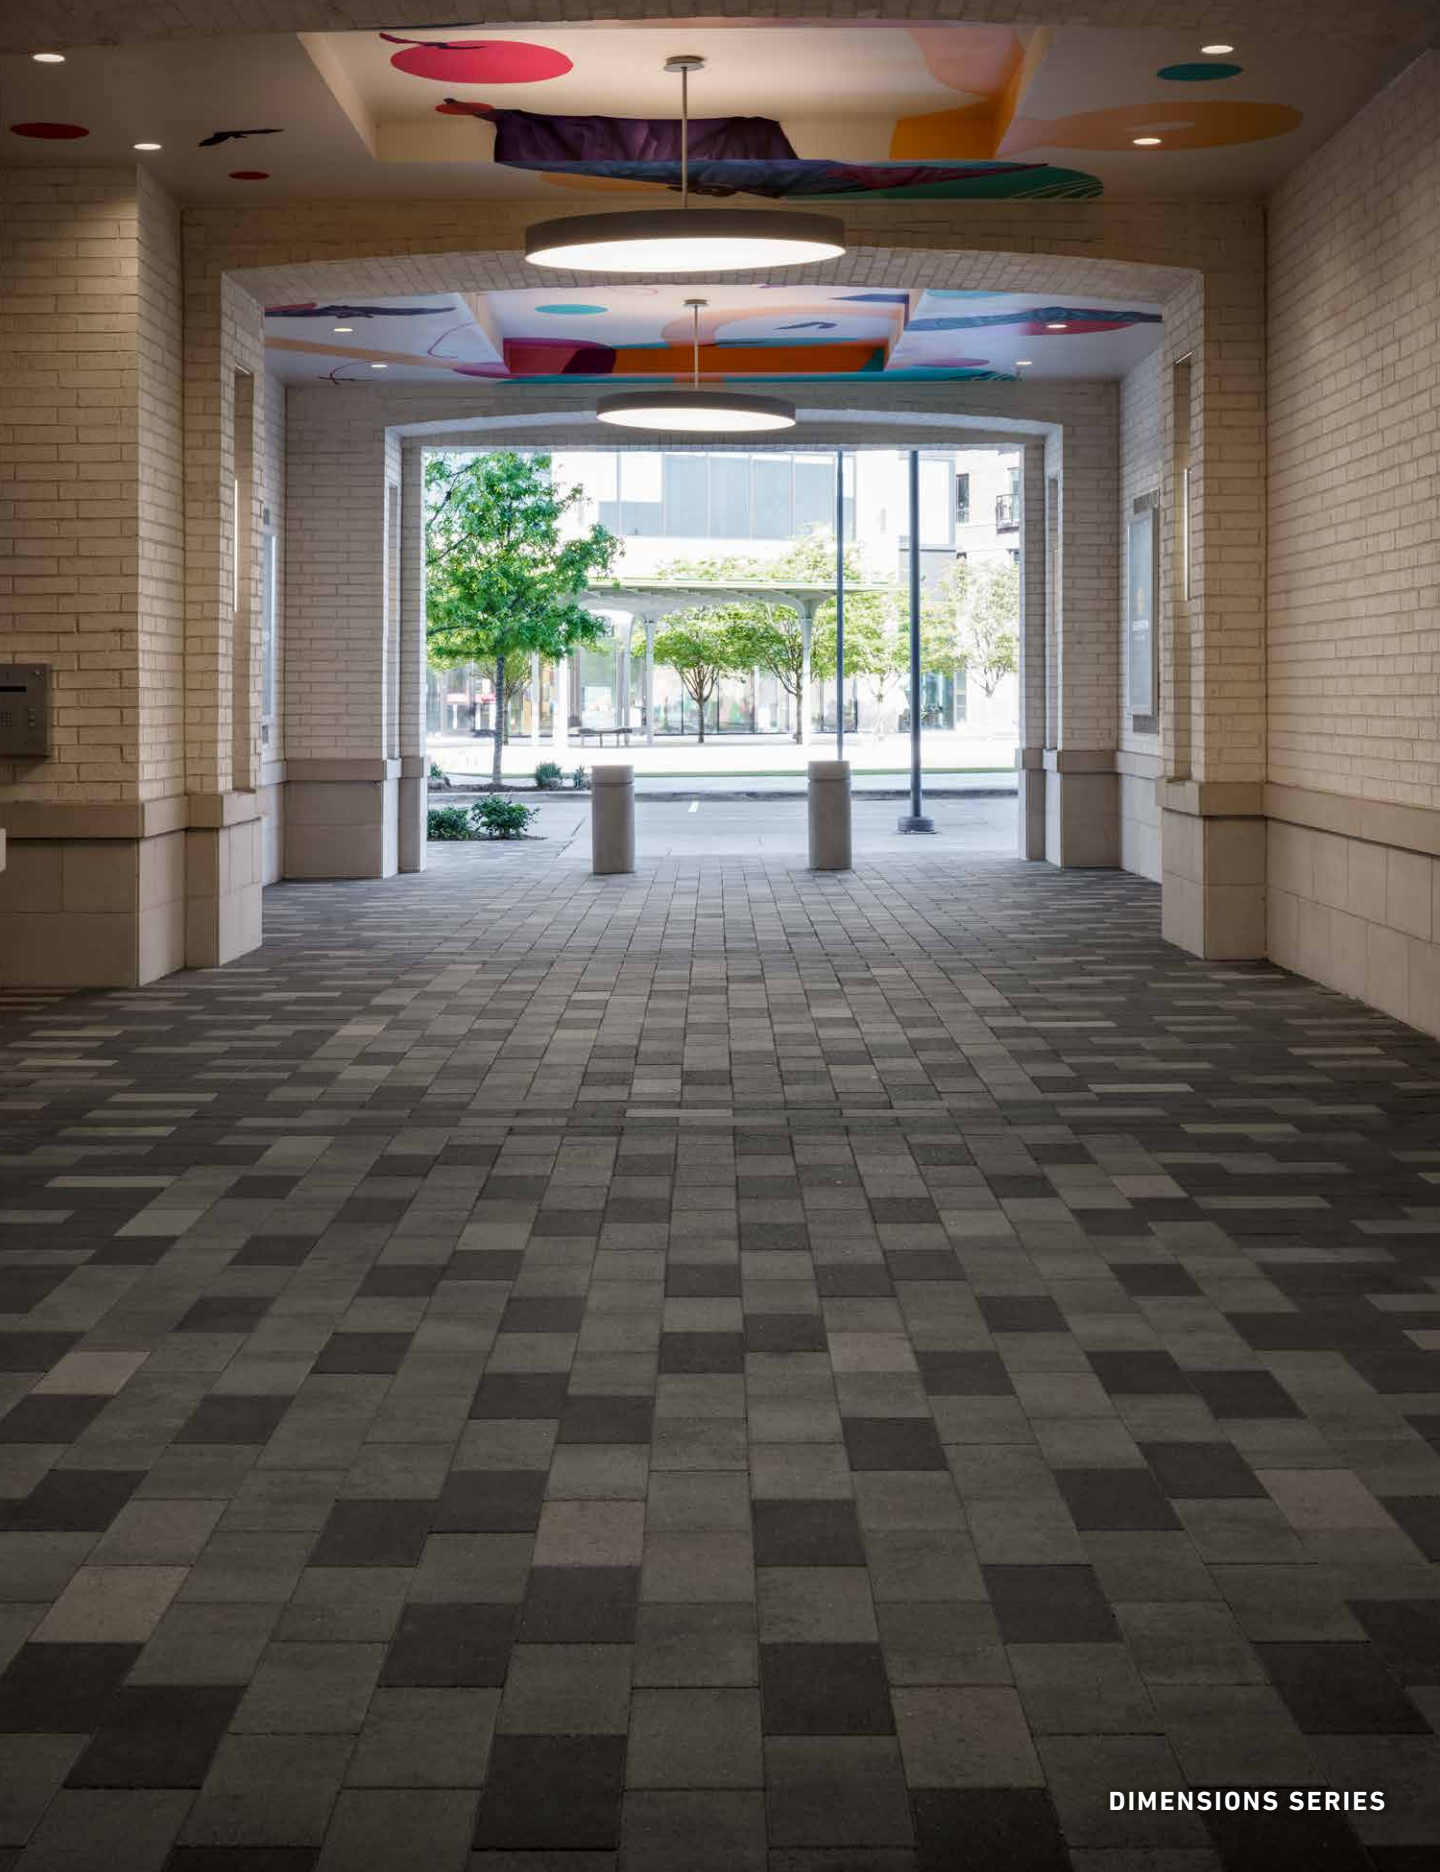

DIMENSIONS SERIES

# PROFESSIONAL SUPPORT



## ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



## CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



## SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you’re looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



## CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



## ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.



## ROOFTOP PLAZA LAYOUT SERVICES

Belgard can provide a rough component count based on square footage. This will include paver counts and pedestal counts. Once the project is awarded, a detailed layout can be created showing more precise pedestal counts, heights and locations.

# JEWELL LOCATIONS



400 Jewell Drive  
Waco, TX 76712  
Ph: 800-792-3216

1607 Spur 529  
Rosenberg, TX 77471  
Ph: 800-792-3216

2725 Prestige Rd.  
Keller, TX 76244  
Ph: 817-337-4408

2627 Joe Field Rd.  
Dallas, TX 75229  
Ph: 972-243-1144

9850 John W. Elliot Dr.  
Frisco, TX 75034  
Ph: 972-335-4122

4523 Brittmore Lane  
Houston, TX 77041  
Ph: 713-937-3966

16745 W. Hardy Rd.  
Houston, TX 77060  
Ph: 281-209-0683

11931 N Garden St.  
Houston, TX 77071  
Ph: 713-974-1911

3733 Bluestein Drive  
Austin, TX 78721  
Ph: 512-462-3363





[BELGARDCOMMERCIAL.COM](https://BELGARDCOMMERCIAL.COM)