

COMMERCIAL

PRODUCT OFFERING

CONNECTICUT, MAINE, MASSACHUSETTS, NEW HAMPSHIRE,
RHODE ISLAND, UPSTATE NEW YORK & VERMONT



BELGARD
COMMERCIAL



PAVER COLORS, FINISHES & APPLICATIONS

Colors

Please contact your local Belgard Representative about additional special order colors. Lead times may vary.



CHARCOAL



SABLE



SILEX



FANEUIL HALL

Finishes

Manufacturing processes generate various finishes that are distinctive and can create the exact look you desire for your project. All processes are not available in all locations. Check with your local Belgard Sales Representative for more information.



Standard (smooth)

Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Shot Blast

Exposes the surface of the paving unit to reveal the natural beauty of the aggregates and pigmentation.



Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.



Occasional Heavy Vehicles








Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.










Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

VEHICULAR & ARCHITECTURAL PAVERS												
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Antiqued		
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm	80 mm	80 mm	✓		✓	Special Order	7 mm	120 (60 mm) 96 (80 mm)

PERMEABLE PAVERS														
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES		MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard	Shot Blast				
AQUALINE™ SERIES														
 3" x 12"	80 mm	3" x 12"	80 mm	80 mm			✓		✓		7 mm	10%	3 mm	88
 4.5" x 9"	80 mm	4½" x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓		10 mm	10%	3 mm	90
 6" x 6"	80 mm	6" x 6"	80 mm	80 mm	80 mm		✓		✓		7 mm	7%	3 mm	90
 6" x 12"	80 mm	6" x 12"	80 mm	80 mm			✓		✓		7 mm	5%	3 mm	90
 Eco Dublin®	80 mm	3½" x 7" 7" x 7" 7" x 10½"	80 mm	80 mm			✓	✓	✓		12 mm	7%	N/A	91.6

CONCRETE GRID PAVEMENTS												
UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	MECHANICAL INSTALL	FINISHES		% SURFACE OPENING	SQ. FT. PER PALLET
									Standard	Shot Blast		
 Turfstone™	80 mm	15¾" x 23⅝"	80 mm						✓		40%	106.8

NOTE: Color selection for above may vary slightly across all paver lines. Contact your Belgard Representative for exact color selections. Turfstone available in natural gray only.

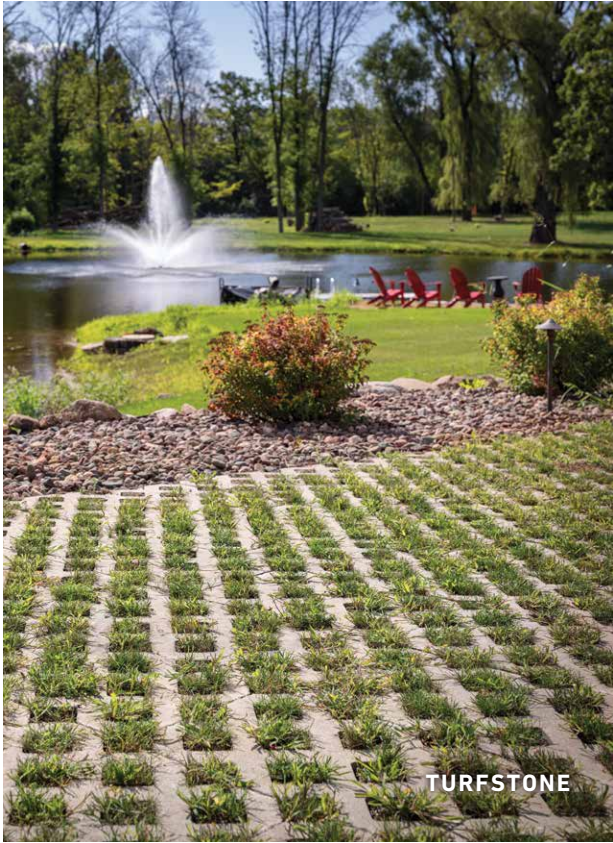
* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions.



AQUALINE



TURFSTONE



AQUALINE



ECO DUBLIN



HOLLAND STONE



HOLLAND STONE

PORCELAIN PAVERS										
UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
										
Contact Belgard Sales Representative for separate catalog displaying full color/product offering on special order basis										
	Ardesie	Stone	¾"	24" x 24"	African Stone	✓	✓	232.5	60	2,160
	Glocal - 24 x 24	Concrete	¾"	24" x 24"	Clear, Ideal, Classic	✓	✓	232.5	60	2,160
	Glocal - 24 x 48	Concrete	¾"	24" x 48"	Clear, Ideal, Classic	✓	✓	271.25	35	2,621
	Lagoon	Stone	¾"	24" x 48"	Moonbeam, Sandshell, Sharkskin	✓	✓	271.25	35	2,621
	Noon - 8 x 48	Wood	¾"	8" x 48"	Daylight, Ember, Honey	✓	Only with Mirage eDeck system	151.8	60	1,415
	Noon - 12 x 48 <i>(special order)</i>	Wood	¾"	12" x 48"	Daylight, Ember, Honey	✓	✓	279	72	2,664
	Quarziti 2.0 - 18 x 36 <i>(special order)</i>	Stone	¾"	18" x 36"	Glacier, Mountains, River, Waterfall	✓	✓	234.9	54	2,235
	Quarziti 2.0 - 24 x 48	Stone	¾"	24" x 48"	Glacier, Waterfall <i>Special Order: River, Mountains</i>	✓	✓	271.25	35	2,621
	Quarziti 2.0 - 24 x 24	Stone	¾"	24" x 24"	Glacier, Mountains, River, Waterfall	✓	✓	232.5	60	2,160
	Verona	Stone	¾"	24" x 24"	Blue Stone, Platinum, Yukon <i>Special Order: Taos</i>	✓	✓	232.5	60	2,160
	Unico	Stone	¾"	13" x 24"	African Stone, Blue Stone, Glacier, Mountains, River, Waterfall, Daylight, Ember, Honey, Clear, Ideal, Classic			254.82	120	2,080



RESISTANT TO FREEZE THAW
Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F).



RESISTANT TO BREAKAGE
Because every slab can withstand loads of over 2200 lbs.



RESISTANT TO CHEMICAL AGGRESSION
Because our pavers are unaffected by alkalis, acids, chemical agents, salt and other de-icing materials.



RESISTANT TO STAINS
Because a high density and ultra-low absorption rate creates a tight paver surface, it fends off surface mold, moss, dirt and other types of stains.



EASY TO LAY
Because of superior accuracy in dimensional sizing and linear sides, the pavers allow for perfectly executed installations with tight and accurate lines.



EASY TO CLEAN
Because it can be cleaned with normal household cleaners and even pressure washed with a **low pressure** washing device.*



EASY TO REMOVE
Because a 24" x 24" slab weighs just 37 lbs., its light weight permits easy removal, serviceability and even reusability. (Excluding adhered installations).



EASY FOR YOU
Because the structured top textures formed on the surface of our pavers create non-slip surfaces.

* It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

6

COMMERCIAL PRODUCT OFFERING

UPSTATE NEW YORK | CT, MA, ME, NH, NY, RI & VT

7

ROOFTOP PAVERS & ACCESSORIES										
UNITS	THICKNESS	SIZE	MATERIAL	FINISHES			PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	WEIGHT PER SQ. FT. (LBS)
				Smooth	Shot Blast	Ribbed				
ROOFTOP PAVERS & SLABS										
Concrete Plaza Slab	2"	24" x 24"	Concrete	✓	✓		✓	84.4	22	24
Porcelain Plaza Paver	¾"	See page 14	Porcelain	✓			✓	–	–	–
Wood Plaza Paver	1.5"	24" x 24" 24" x 48"	Ipe Wood	✓		✓	✓	–	–	5.56
ACCESSORIES										
Cubes & Cube Tops <small>(Made to order, custom sizes available)</small>	–	24" x 24" x 16½" 48" x 24" x 16½"	Ipe Wood or Powder Coated Aluminum	✓			✓	–	–	–
Pedestals - Fixed Height	–	¼", ½", ¾" height	–				✓	–	100 pcs per box	–
Pedestals - Adjustable	–	1¼" – 36" height*	–				✓	–	30 pcs per box	–

Plaza Slab Colors - Shot Blast



Plaza Slab Colors - Matte

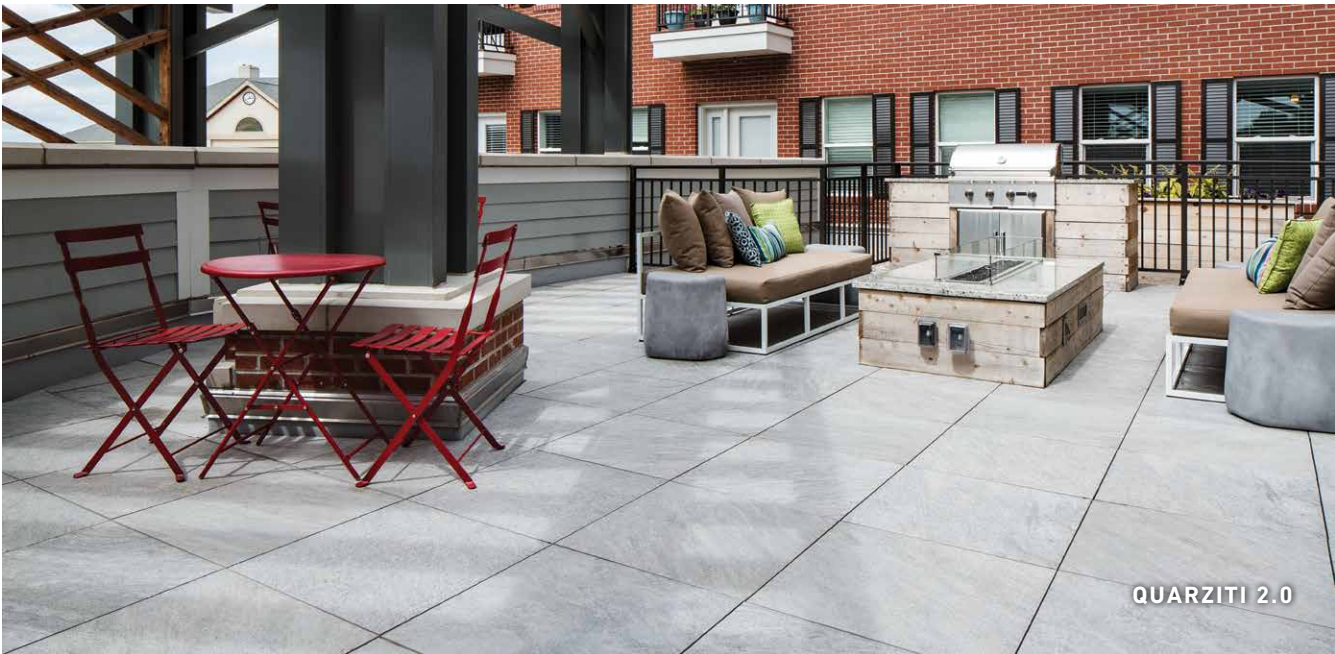




WOOD PLAZA PAVERS



CONCRETE PLAZA SLABS



QUARZITI 2.0











ARDESIE



NOON



GLOCAL

SEGMENTAL RETAINING WALLS (SRW)																	
UNITS		UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE			FACE STYLES			BATTER/ SETBACK	SQ. FT. PER PALLET	PCS. PER PALLET
		Height	Width	Depth	Block	Other	Column/ Corner Unit	Step Unit	Sculpted	Split	Tumbled	Straight	Virtual Joint	Victorian			
	AB® Classic	8"	18"	12"			✓			✓		✓			6°	40	40
	AB® Stone	8"	18"	12"			✓			✓		✓			12°	40	40
	AB® Jumbo Jr.	8"	9"	9½"			✓			✓		✓			6°	40	80
	Diamond Pro®	8"	18"	12"	Rear Lip		✓			✓		✓			7.1°; 1" Per Course	48	48
	Diamond Pro® PS Straight Face	8"	18"	12"		Fiberglass Pin	✓			✓		✓			1.7° or 7.1°	48	48
	Diamond Pro® PS Quarried Face <i>(special order)</i>	8"	18"	12"		Fiberglass Pin	✓	<i>Ask a Belgard Representative for step options</i>	✓						1.7° or 7.1°	48	48
	Diamond Pro® PS Victorian Face	8"	18"	12"		Fiberglass Pin	✓			✓				✓	1.7° or 7.1°	48	48
	Vertica Pro®	8"	18"	21"	Surface Lug		✓			✓		✓			2°	30	30



DIAMOND PRO PS
VICTORIAN FACE



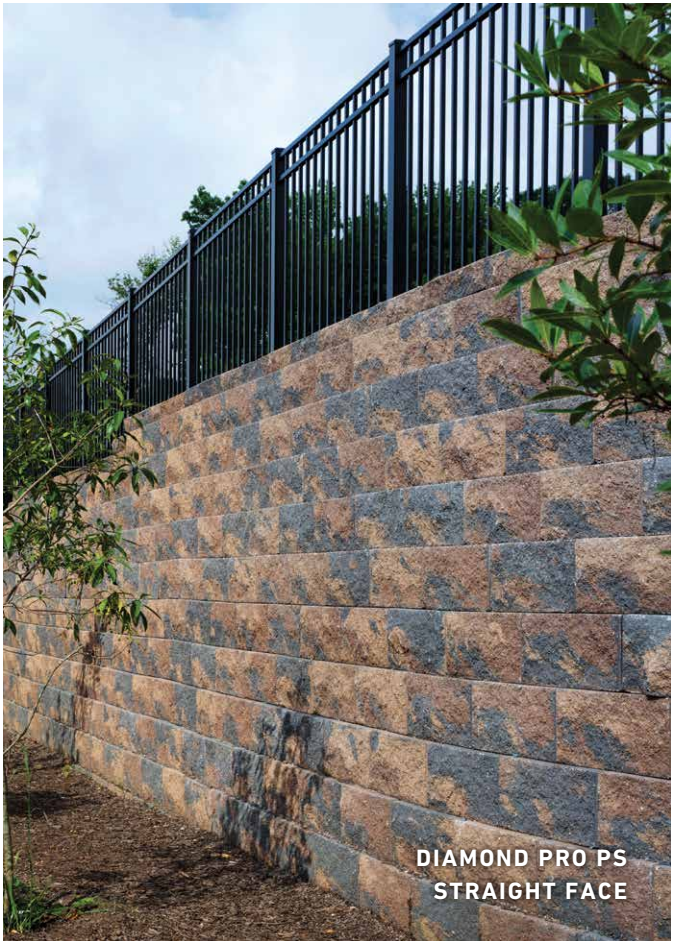
DIAMOND PRO
STRAIGHT FACE



DIAMOND PRO
STRAIGHT FACE



DIAMOND PRO PS
VICTORIAN FACE



DIAMOND PRO PS
STRAIGHT FACE



VERTICA PRO
STRAIGHT FACE



PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best P/ICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you’re looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.

OLDCASTLE APG NEW ENGLAND CONTACTS



Oldcastle APG
A CRH COMPANY

SALES REPRESENTATIVES

Chip George
Belgard Commercial Development
Ph: 603-340-4337

LOCATIONS

46 Spring Street
Holbrook, MA 02343
Ph: 781-767-2202

36 Budlong Road
Cranston, RI 02920
Ph: 401-942-4800



BELGARDCOMMERCIAL.COM