



VS5-88

COMMERCIAL PAVER

THE ULTIMATE IN PAVEMENT STABILITY AND APPEARANCE FOR PEDESTRIAN TRAFFIC.



✓ FEATURES & BENEFITS

- Designed to be diagonally symmetrical so the pavers always fit together – regardless of how they are rotated.
- 4 sizes allow for modularity and virtually limitless design options
- Manufactured to CSA A231.2 specification
- Concrete strength: 8000 PSI (55 MPA)
- Absorption: Shall not exceed 5%
- Can be utilized to construct an ACA (Accessible Canada Regulation) compliant pavement


M METROPOLITAN COLLECTION

🧩 MULTI-DIRECTIONAL INTERLOCK


- Shifting prevention measures are located on VS5's five sides.
- The underside of the paver are profiled, in essence creating the fifth side with shifting prevention measures.
- The "clawing effect" in the pavement bed increases frictional resistance by 54% compared to non-profiled stones.

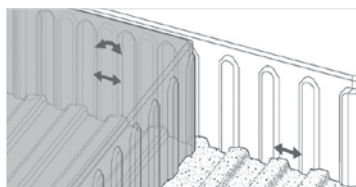

VERTICAL DEFORMATION TRACK GROOVES



HORIZONTAL DEFORMATION



5 SIDED INTERLOCK

Check with your local Belgard Representative for product availability and colour options.

🧱 SHAPES & SIZES

75 X 300



75 x 300 x 88mm
3 x 12 x 3.46"

150 X 300




150 x 300 x 88mm
6 x 12 x 3.46"

300 X 300



300 x 300 x 88mm
12 x 12 x 3.46"

300 X 600



300 x 600 x 88mm
12 x 24 x 3.46"